Asus X540S panel Disassembly

This guide will show you how to remove the keyboard panel for the Asus X450S.

Written By: Padraic Hoselton


This document was generated on 2019-09-16 11:43:54 PM (MST).
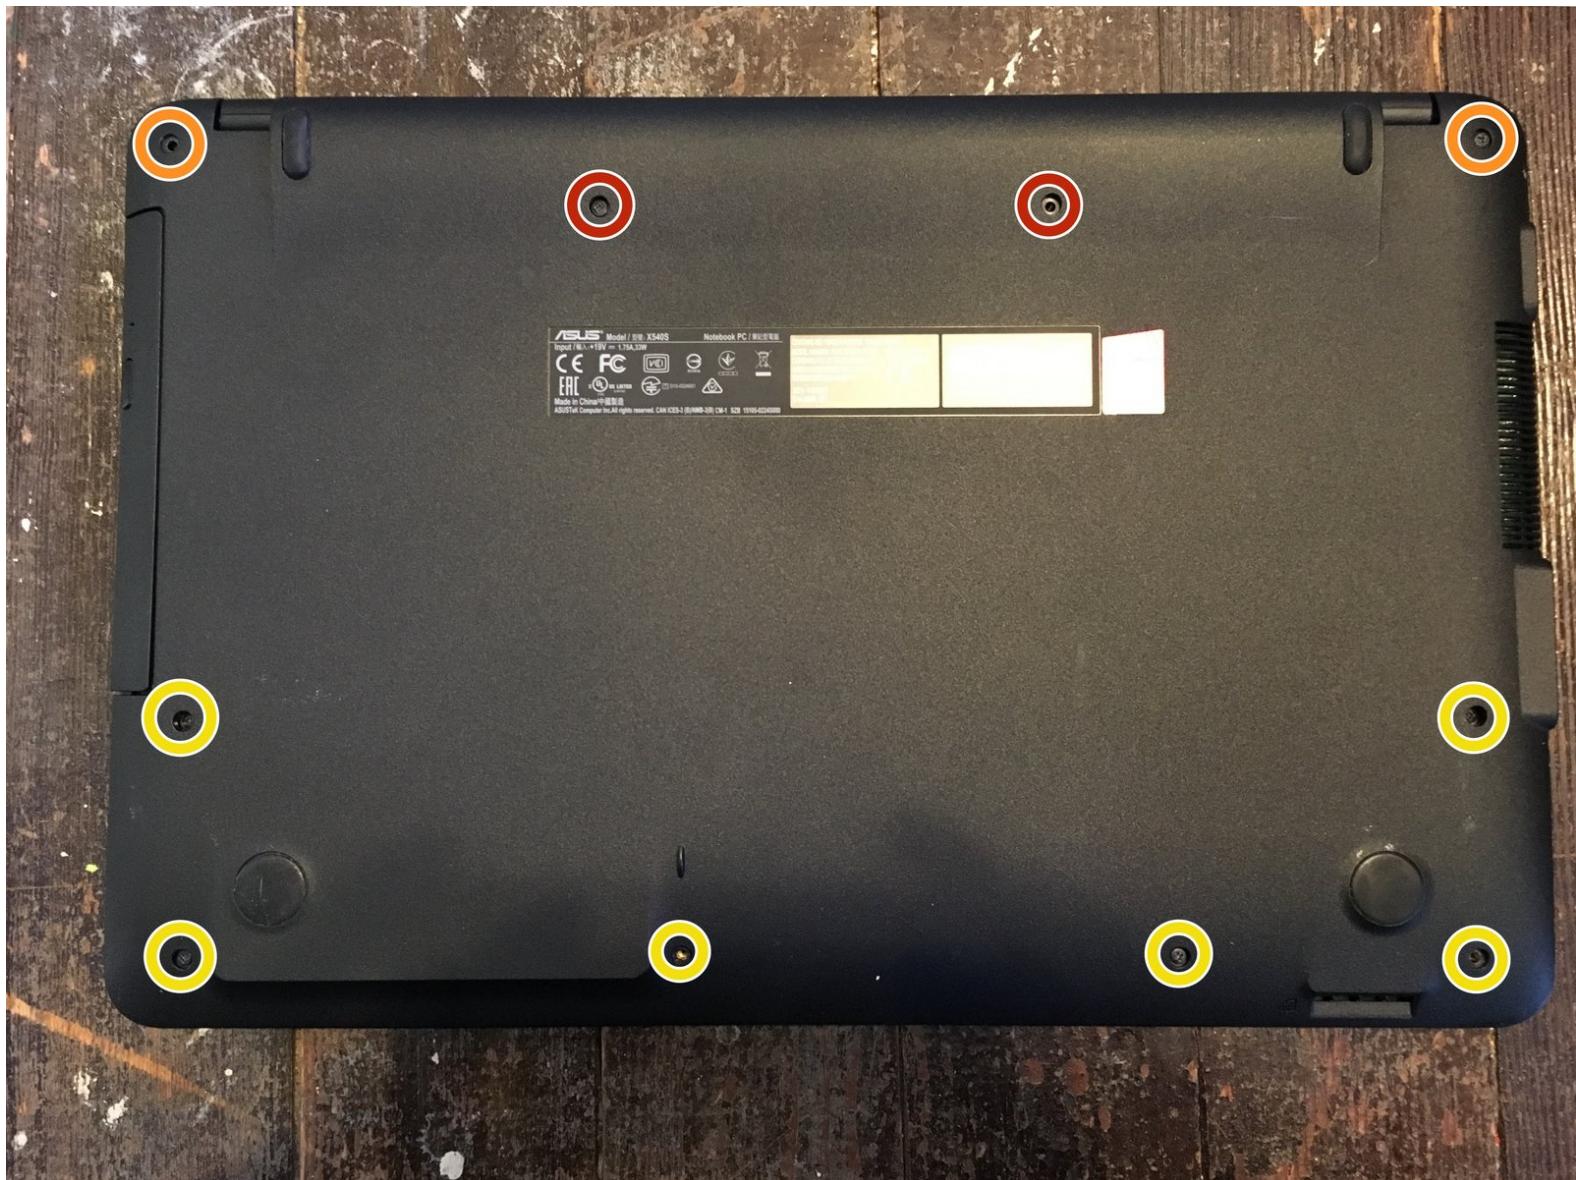
INTRODUCTION

This guide will show you how to remove the keyboard panel for the Asus X450S.

TOOLS:

- Phillips #1 Screwdriver (1)

This document was generated on 2019-09-16 11:43:54 PM (MST).

© iFixit — CC BY-NC-SA | www.iFixit.com | Page 2 of 3

Step 1 — Asus X540S panel Disassembly
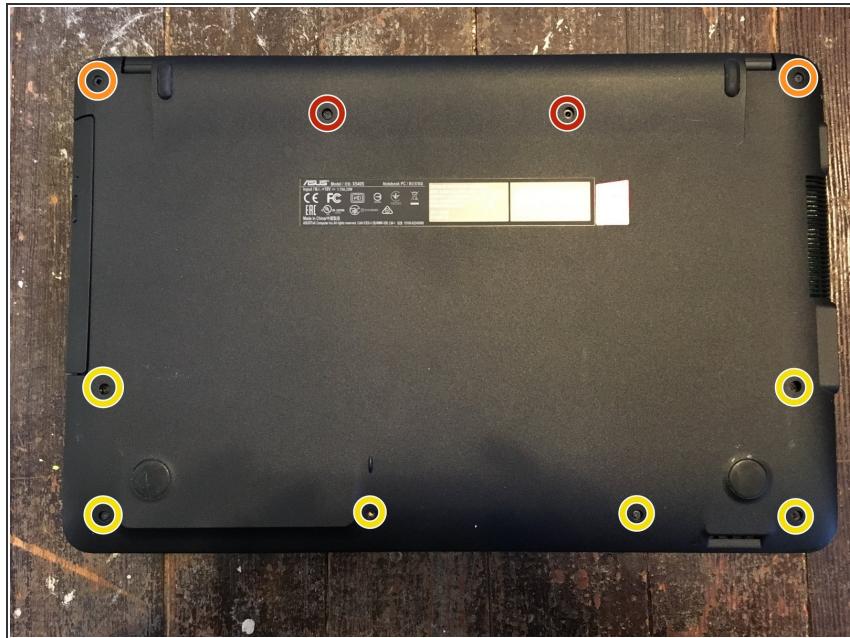
- Remove the two 15mm Philips #1 screws.

- Remove the two 12mm Philips #1 screws.

- Remove the six 9mm Philips #1 screws.

Step 2
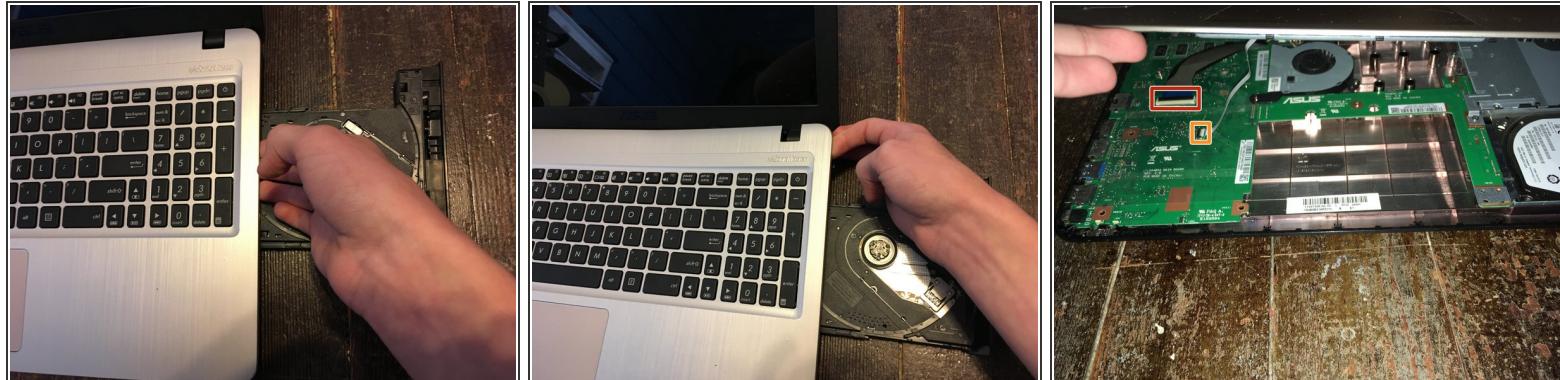
- Lift the side of the top.

- Remove the keyboard cable.

- Remove the trackpad cable.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-16 11:43:54 PM (MST).