




Asus X751MA-DH01TQ Screen Replacement

This guide will show you how to replace the screen of the Asus X751MA-DH01TQ.

Written By: Collen Bleigh

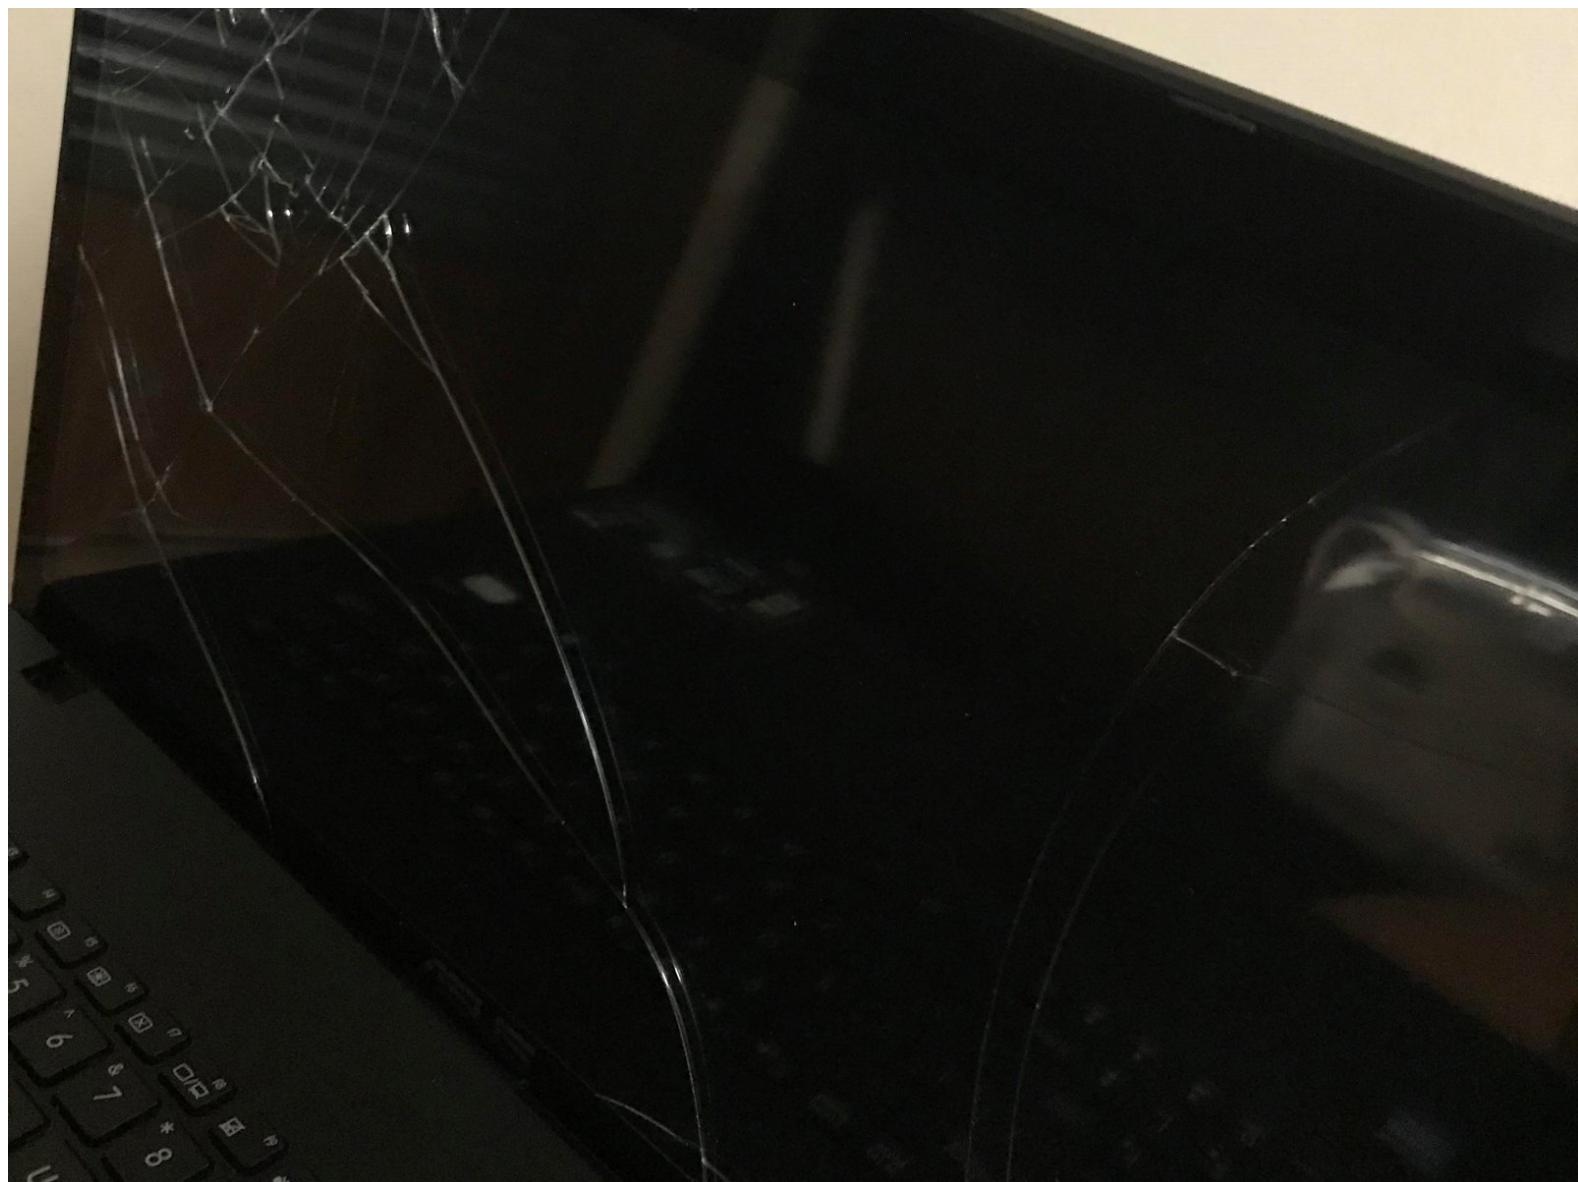

 **TOOLS:**




- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Screen



- Turn the laptop upside down.
- Unscrew the 10 screws on the bottom of the laptop using a PH00 screwdriver bit.

Step 2

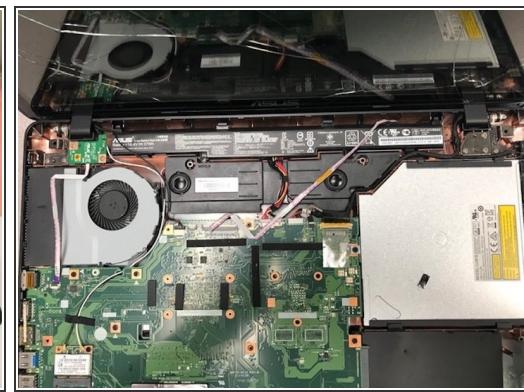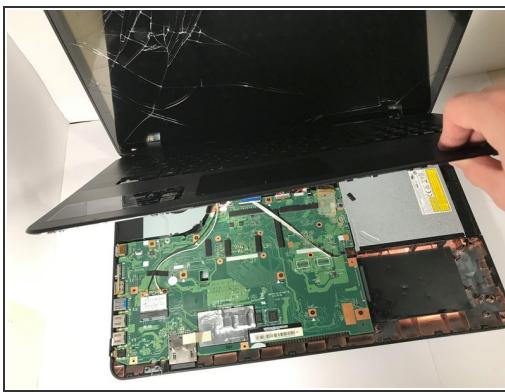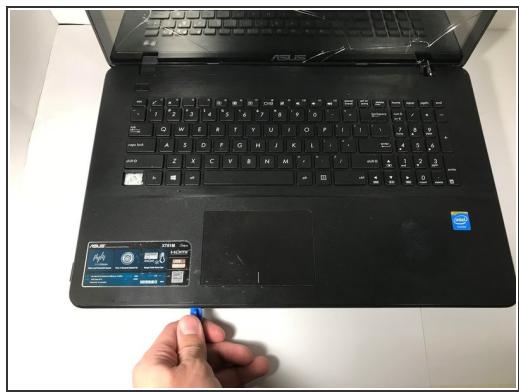

- Use a plastic opening tool to detach and take off the keyboard.

Step 3




- Remove the eight 5.5 Phillips #00 screws located at the top right and left hand side of panel.
- There are four screws on each side.

Step 4




- Remove the four 4mm Phillips #00 screws on the bottom left and right of the screen.
- There are two screws on each side.

Step 5

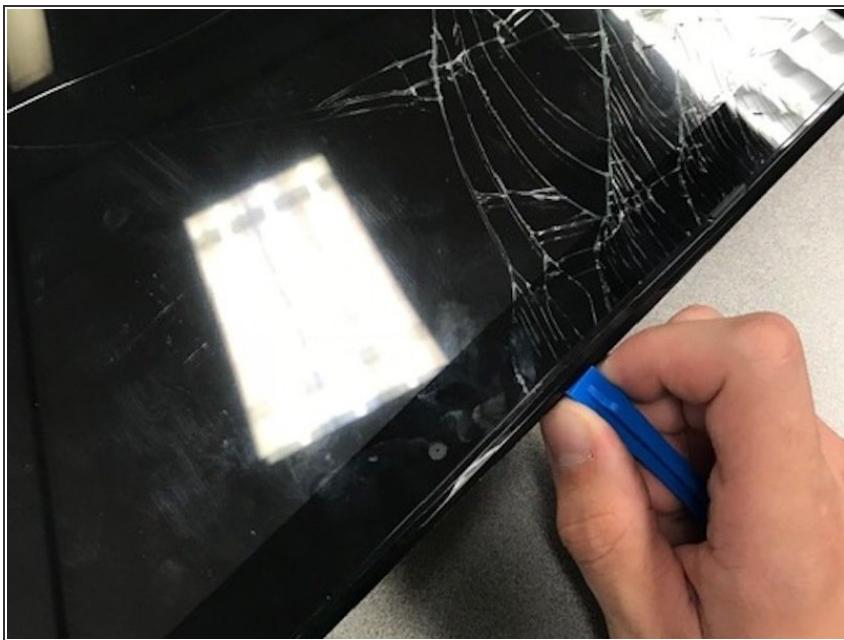


- Insert the plastic opening tool on the side of the screen and slide it all the way around to open the screen up.

Step 6

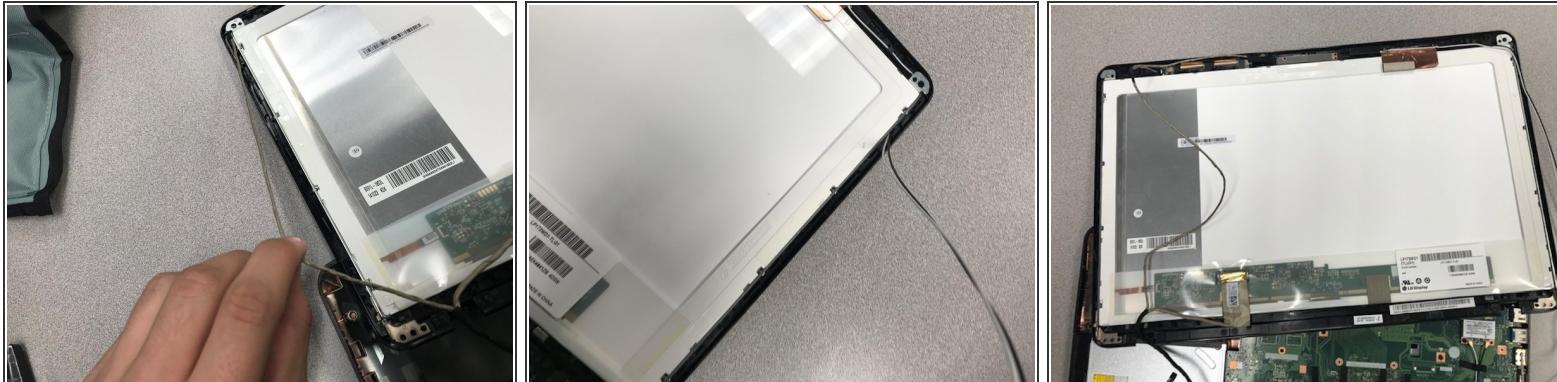


- Remove the cords on the left and right side of the screen.

Step 7

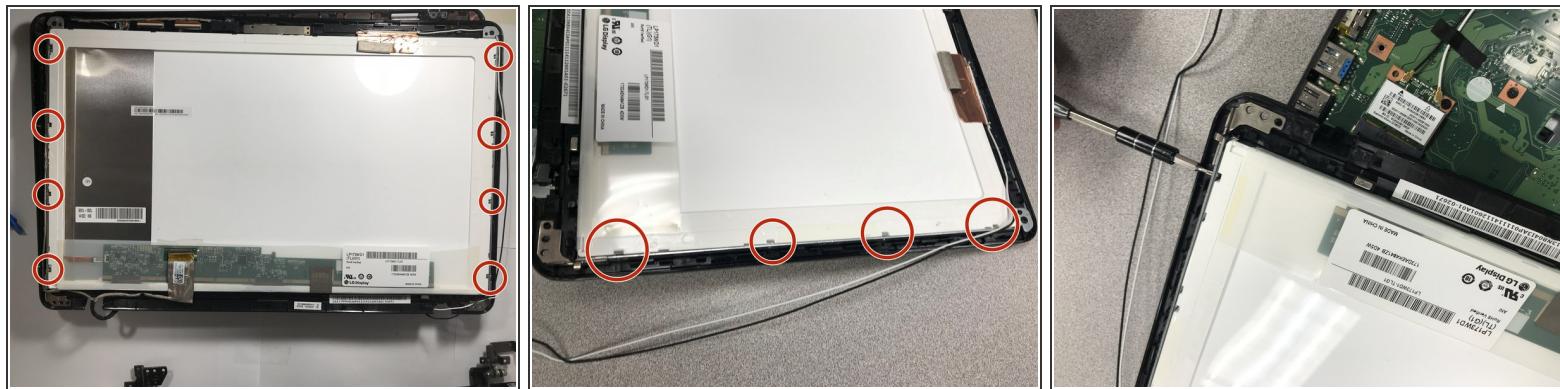


- Remove the eight total screws (4 on each side) that are on the side of the white part on the back of the screen.

Step 8

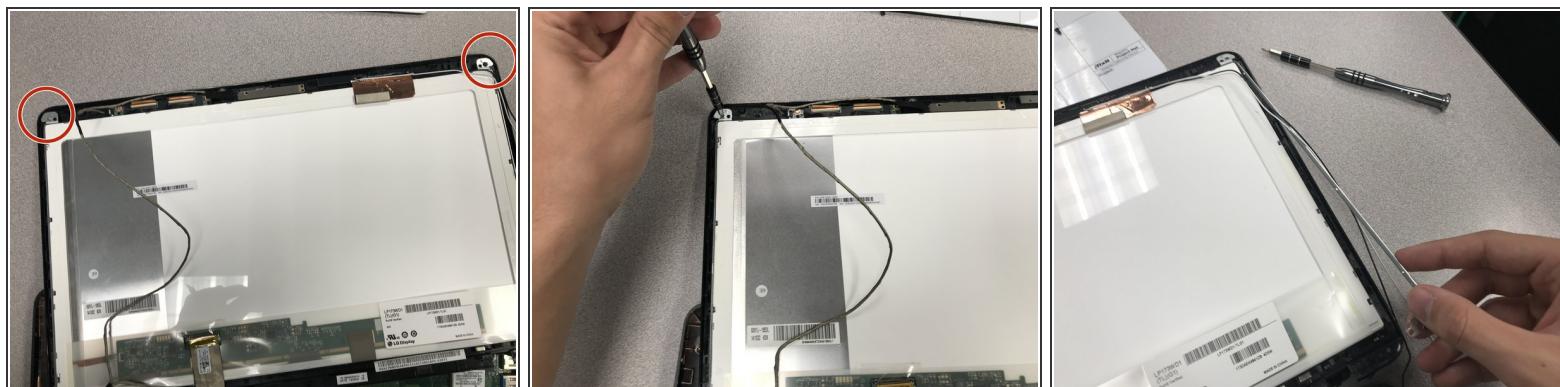

- Remove the two 4mm Phillips #00 screws on the top corners of the back of the screen.
- Remove the metal bars that you have just unscrewed.

Step 9

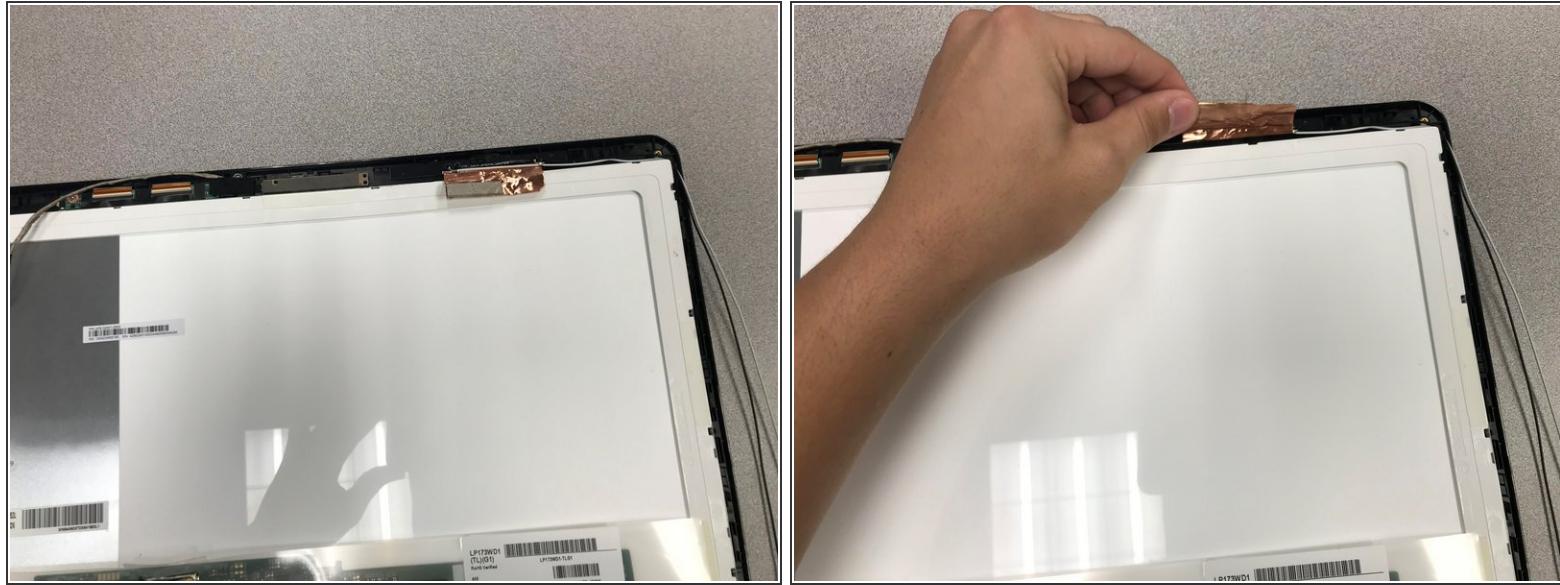

- Peel back the bronze sticker that is connecting the white border piece to the outside edge of the screen.

Step 10



- Use the plastic opening tool to pry open the white part away from the screen.

Step 11



- Pull the white part out and pull out the rest of the screen.

To reassemble your device, follow these instructions in reverse order.