




Asus Zenbook UX303L Cooling Fan Replacement

This guide will show the user how to take apart the Asus Zenbook UX303, to replace the cooling fan.

Written By: Bianka Castaneda

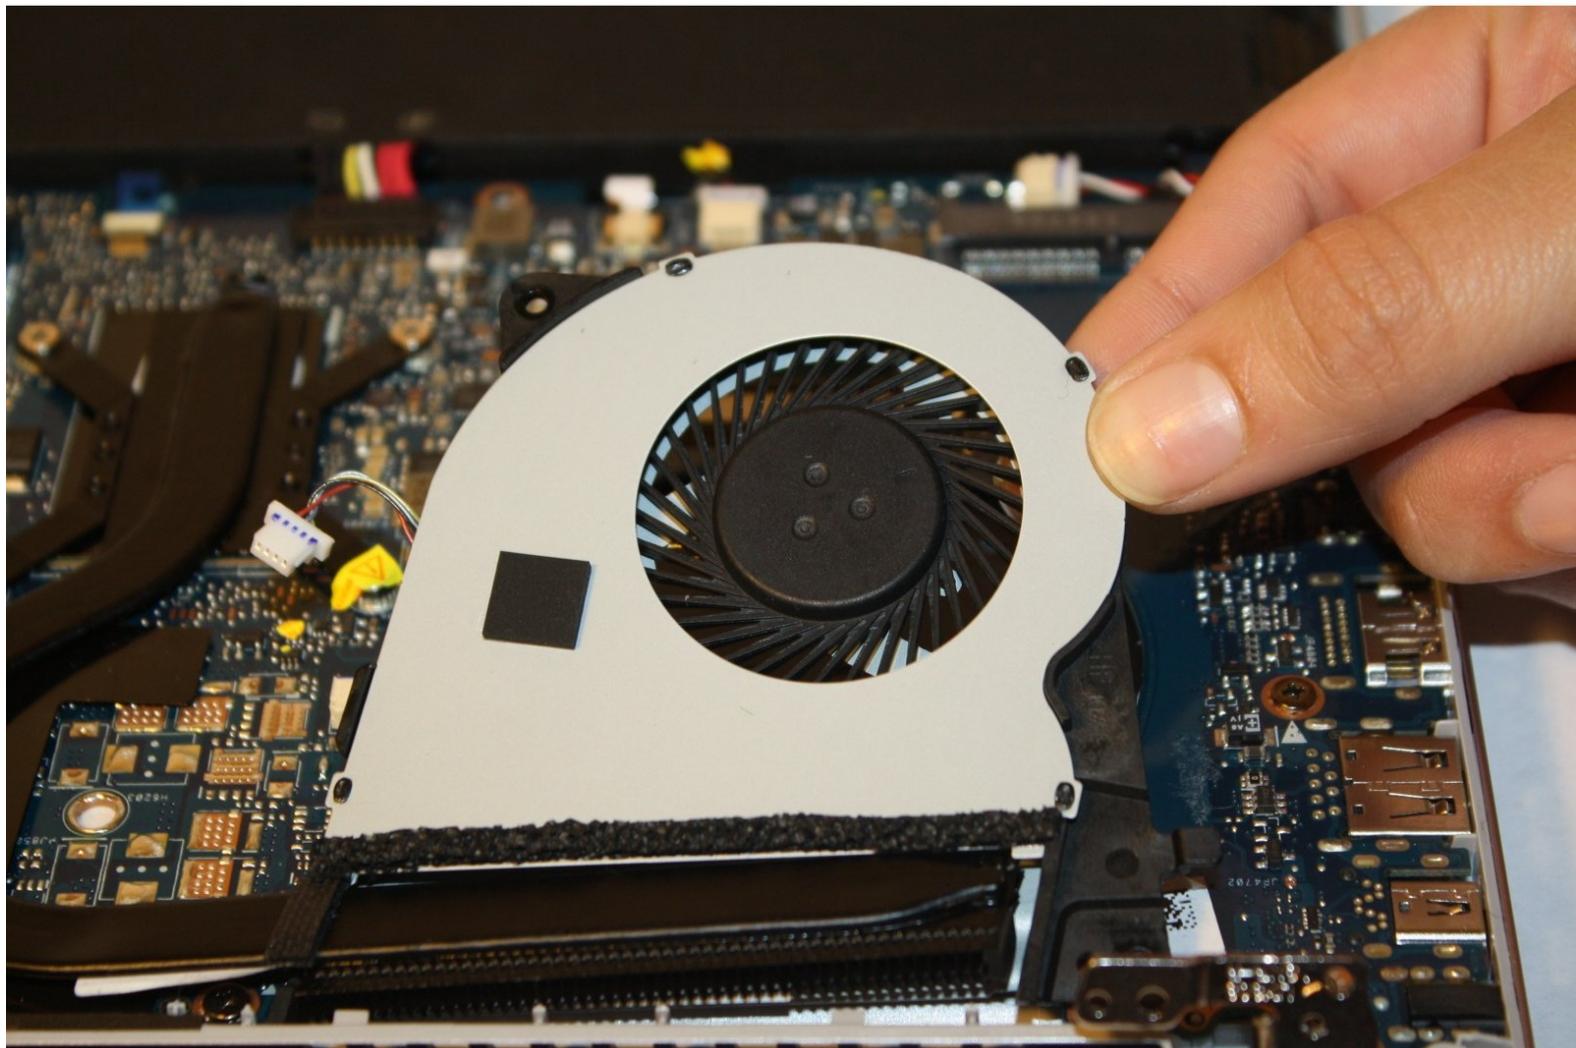

 **TOOLS:**


- [T5 Torx Screwdriver \(1\)](#)
- [Phillips #1 Screwdriver \(1\)](#)

Step 1 — Cooling Fan




- Make sure the device is turned off and disconnected from the battery charger.

Step 2

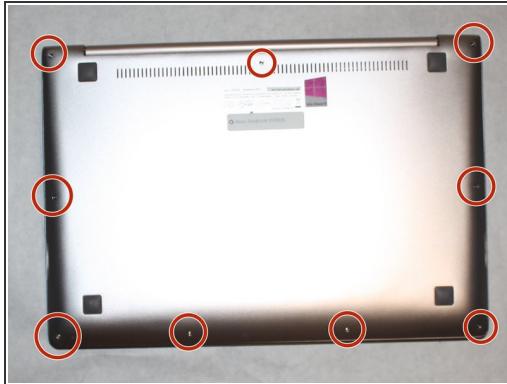


- Remove the rubber pads closer to the air vents and remove the two screws using a P0 screwdriver.
- Remove all the nine screws from the bottom of the device using a T5 screwdriver.
- Carefully remove the bottom cover.

Step 3

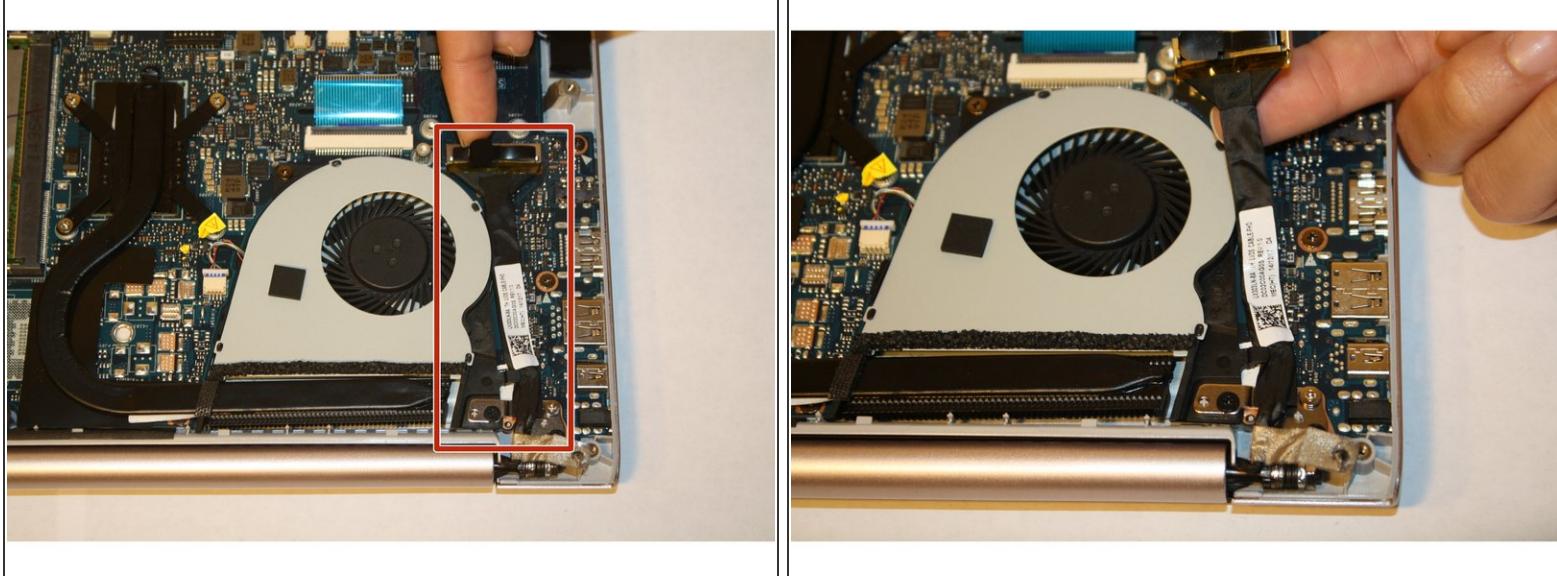


- Remove the LVDS cable next to the cooling fan.

Step 4

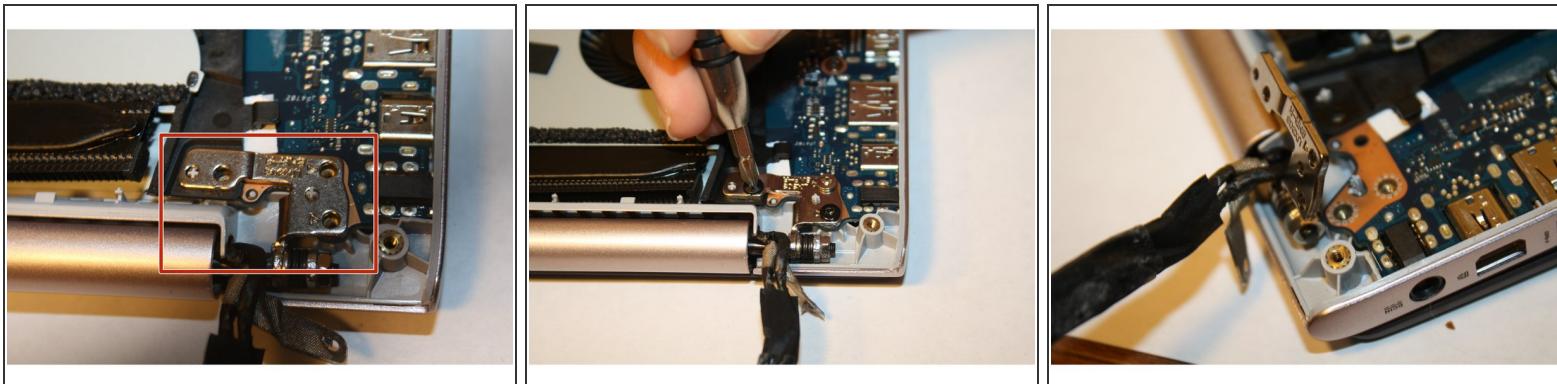


- Remove the three screws from the hinges using a PH-1 screwdriver.
- Open the device at a 90 degree angle to free the hinges.

Step 5

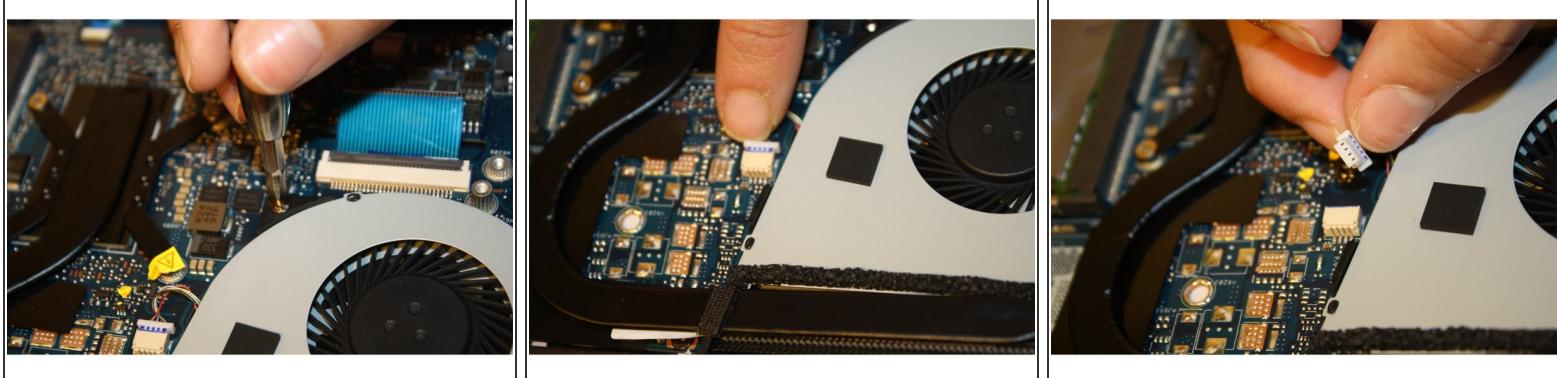

- Remove the screws attached to the cooling fan with a PH-1 screwdriver.
- Disconnect the wire attaching the cooling fan to the motherboard.

Step 6

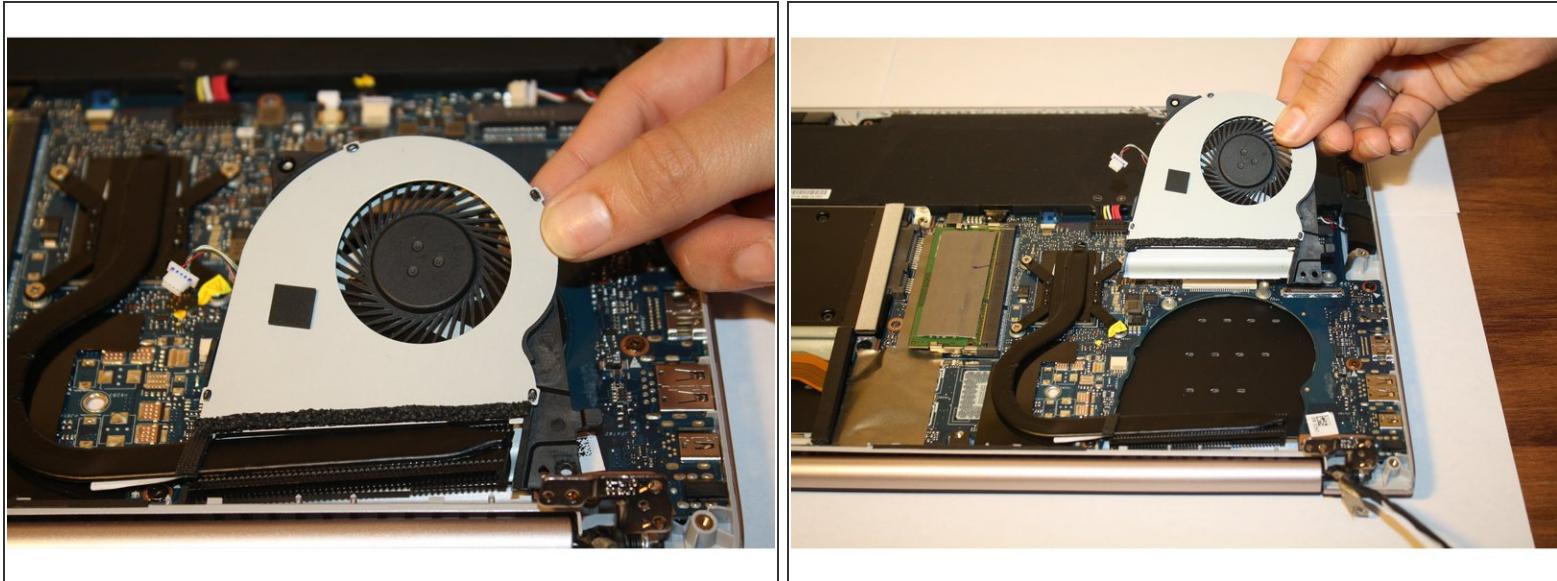

- Gently lift and slide the cooling fan out.

To reassemble your device, follow these instructions in reverse order.