



Asus Zenfone 4 Max Camera Replacement

How to replace a Asus Zenfone 4 Max camera.

Written By: Maegan West



INTRODUCTION

Tools needed include an iFixit opening tool, a metal spudger, a removable head screwdriver with a T3 bit and a PH0 bit, and needle-nosed tweezers.

TOOLS:


- [Tweezers \(1\)](#)
- [T3 Torx Screwdriver \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Camera



- Using a removable head screwdriver and a T4 bit, remove the screws on the base of the phone on either side of the charging port.

Step 2

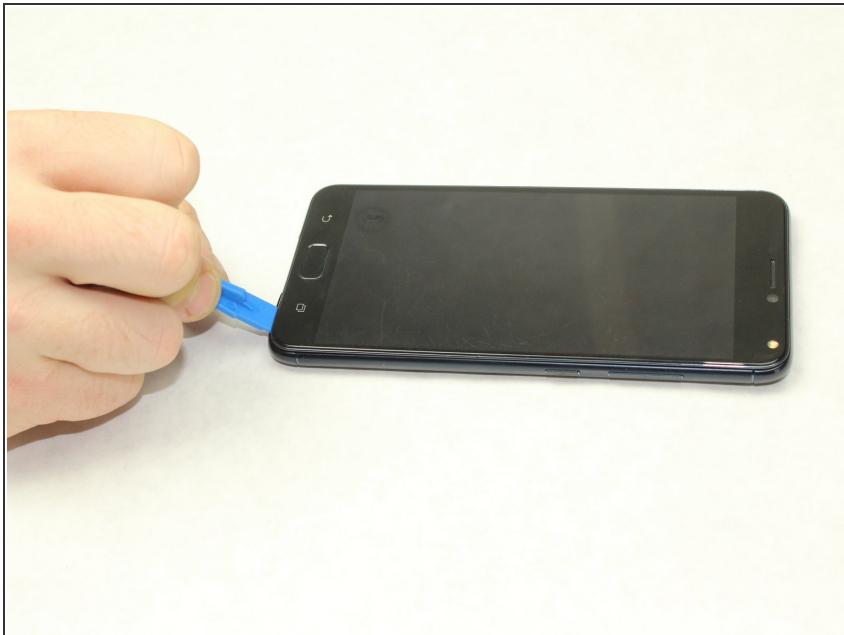

- Starting near either of the 4 corners of the device notice the seam of the case around the front of the device.
- Begin using the opening tool with a moderate amount of force to wedge between the back case and the phone.
- Gently move the tool around the edges towards each corner until the back is removed.

(i) You will be able to hear the back casing pulling apart from the phone. Do not be alarmed, but work gently with the device.

Step 3



- Using a removable head screwdriver and a PH0 bit, begin removing the panel beneath the two cameras by unscrewing the screw.

Step 4



- Use the tweezers to gently pull up on the flaps beneath the two cameras.
- Completely remove the cameras and replace with the new cameras.

To reassemble your device, follow these instructions in reverse order.