



# BLU Dash Music 4.0 Headphone Jack Replacement

This guide will teach you how to replace the headphone jack.

Written By: Lioma Terrero Soto



 **TOOLS:**

- iFixit Opening Tools (1)
- Phillips #0 Screwdriver (1)
- Soldering Iron (1)
- Solder (1)

 **PARTS:**

- Blu Dash 4.0 headphone jack (1)

## Step 1 — Remove the Back Cover




- Use the plastic opening tool or your fingernail to pry off the back cover.

## Step 2 — Remove the Battery





- Use the plastic opening tool or your fingernail to pry off the battery from the top right corner.

## Step 3 — Remove the Screws

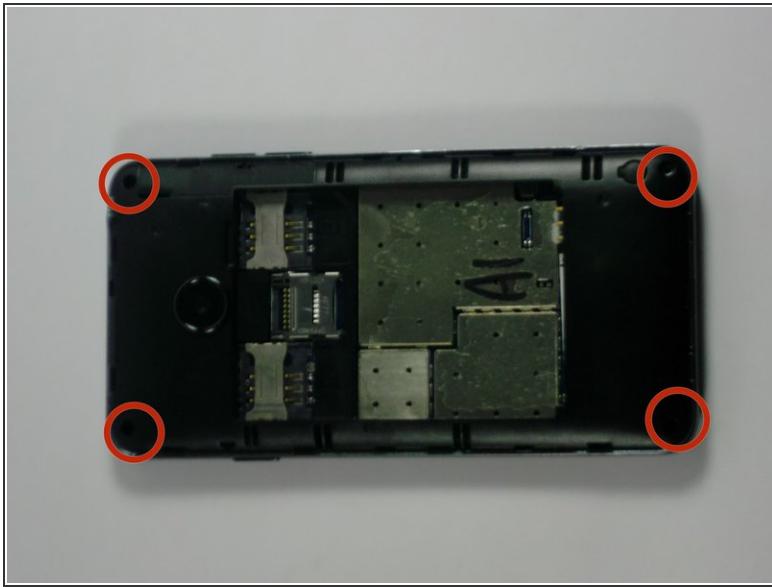



- Use a screwdriver to remove each of the four screws.

## Step 4 — Remove the Inner Cover

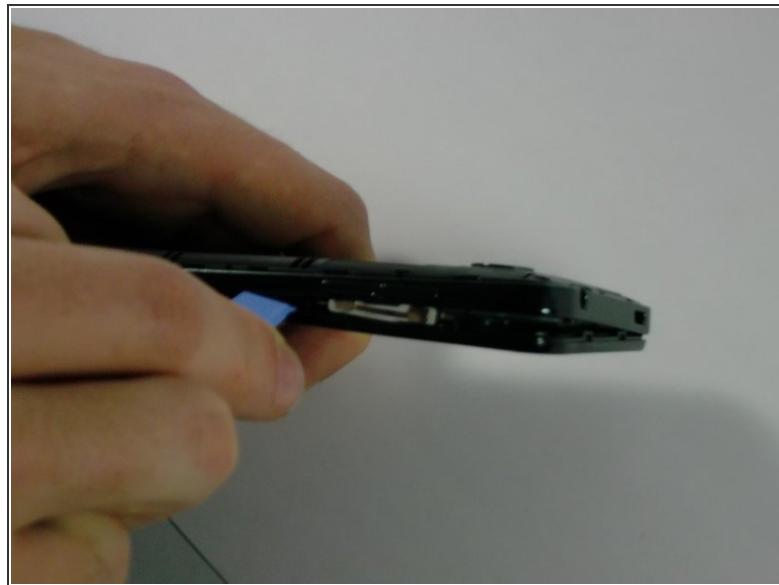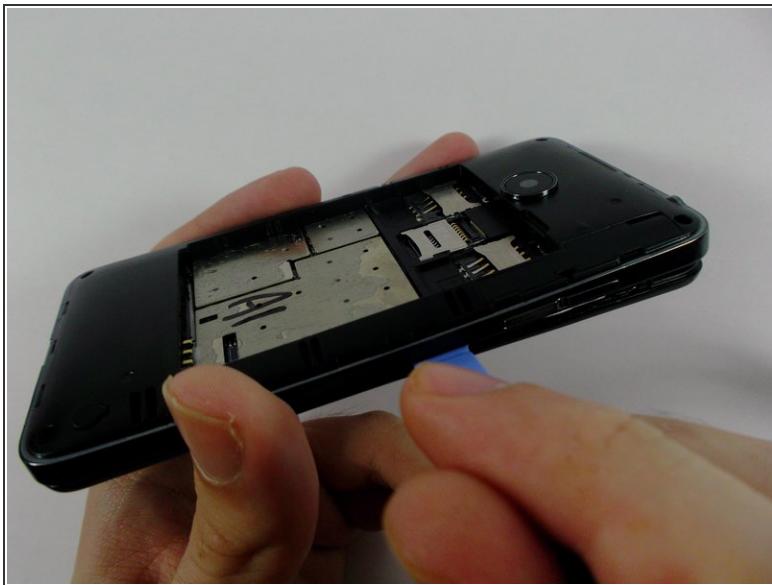



- Take the plastic opening tool and insert it in the crease between the front screen and the inner back cover.
- Slide the plastic opening tool along the edge of the phone to pry the two covers apart.

## Step 5 — Remove the Black Pad

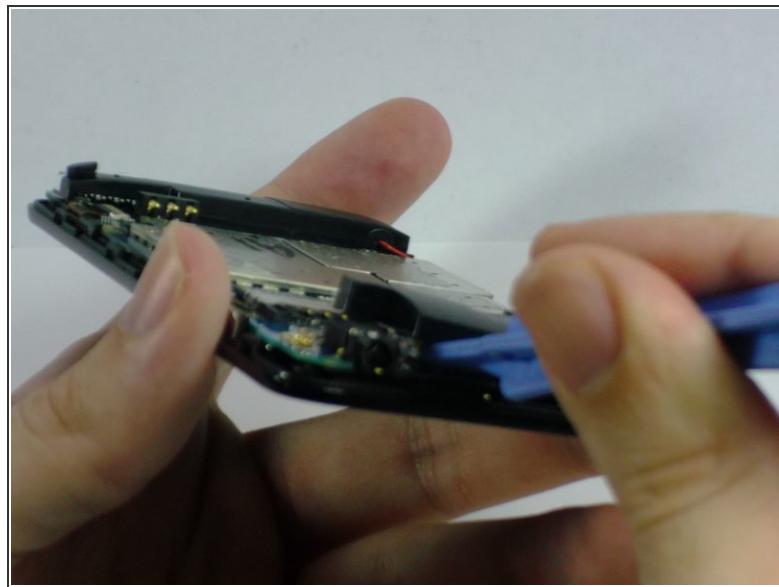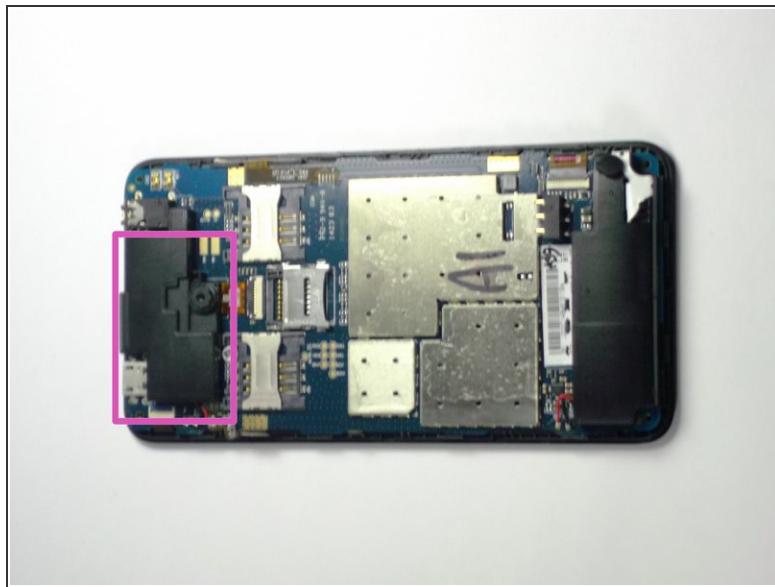


- Insert the plastic opening tool between the black pad and the circuit board. Then gently pry off the black pad.
- This will make the connections of the charging port more accessible.

## Step 6 — Remove the Solder Connections

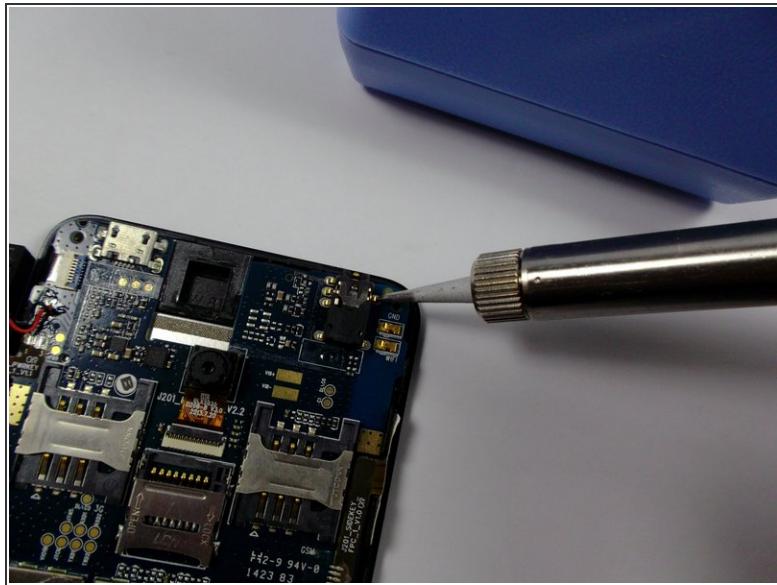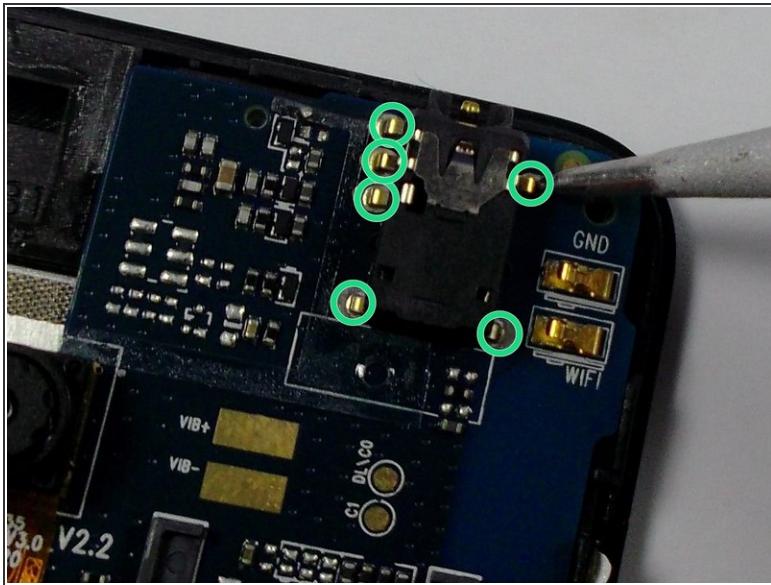

- Using a soldering iron and a pair of pliers, melt the soldering connections around the headphone jack.
- Quickly pull off the current headphone jack while the soldering connections are still soft.

## Step 7 — Mount the New Headphone Jack

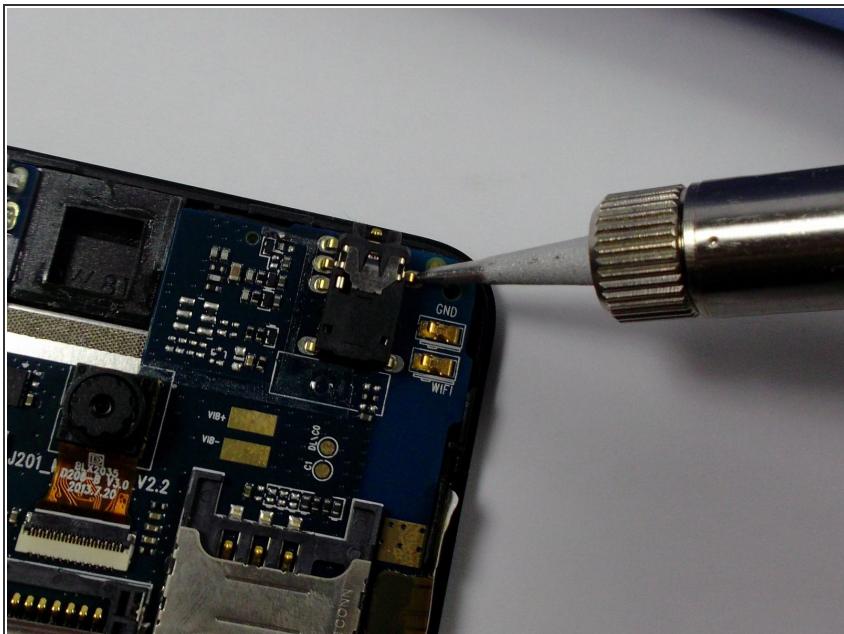

- Mount the new headphone jack such that the prongs of the headphone jack line up with the soldering connections.
- Using a soldering iron, solder the connections in place.

To reassemble your device, follow these instructions in reverse order.