




# BLU Studio 5.0 S II Speaker Replacement

This guide will show you a step by step process on how to replace a BLU Studio 5.0 S II speaker.

Written By: Maria Juzaino

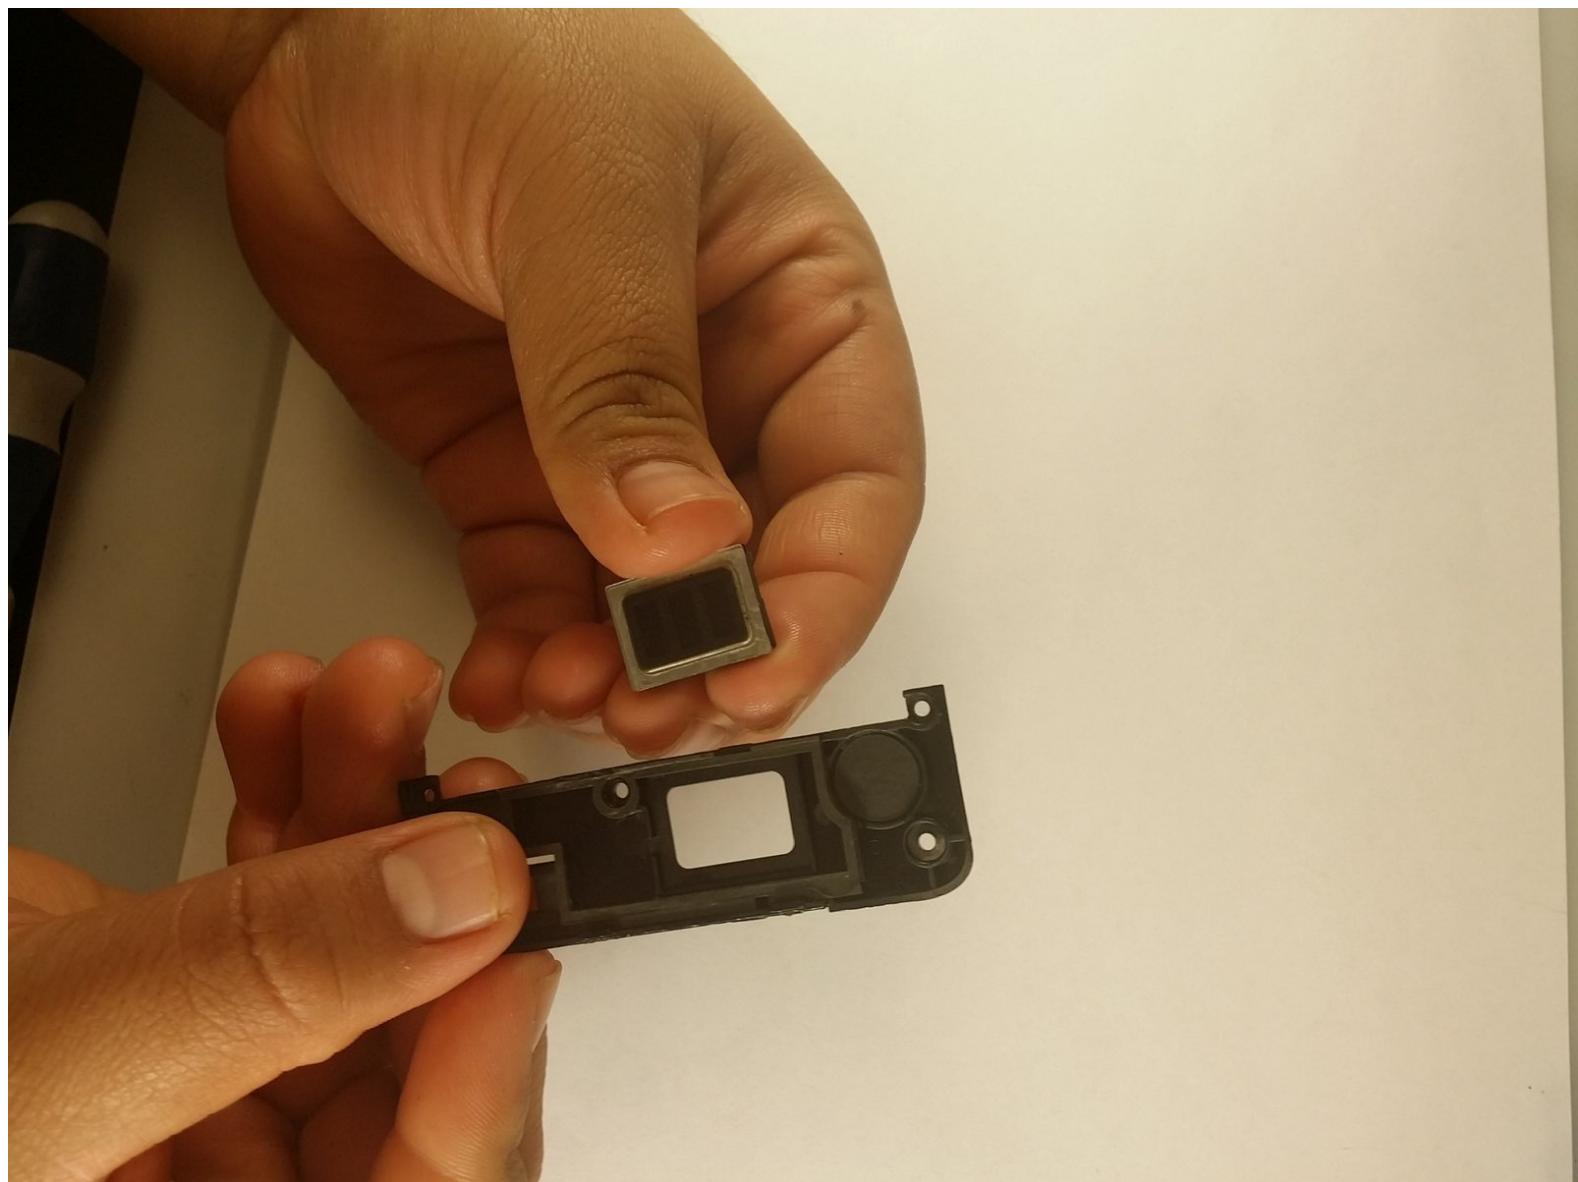


## INTRODUCTION

This guide will show you how to replace the speaker on this phone.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)

## Step 1 — Remove back cover.

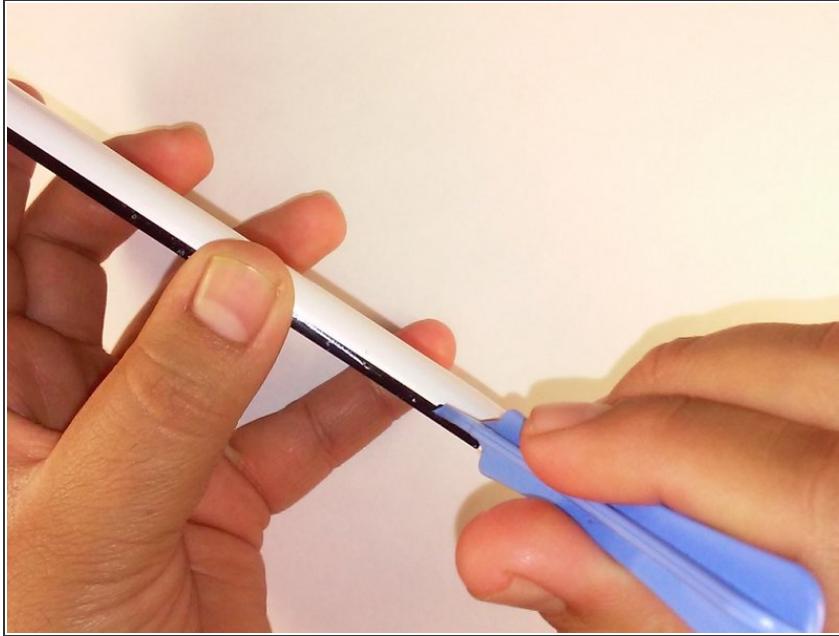

- Remove the back cover on the phone with the plastic opening tool.

## Step 2 — Remove battery




- Remove battery with plastic opening tool.

## Step 3 — Remove screws




- On the bottom part of the back of the phone with a Phillips screwdriver #00 tool remove the 6 screws that hold the speaker in place.

## Step 4 — Remove speaker plastic backing

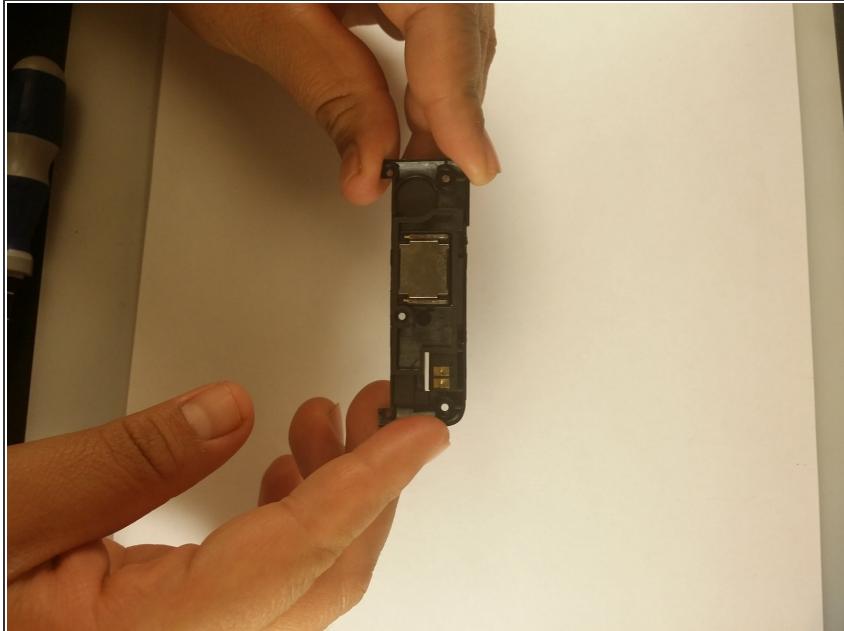

- After removing screws gently pull off the speaker from the back of the phone.

## Step 5 — Remove speaker.

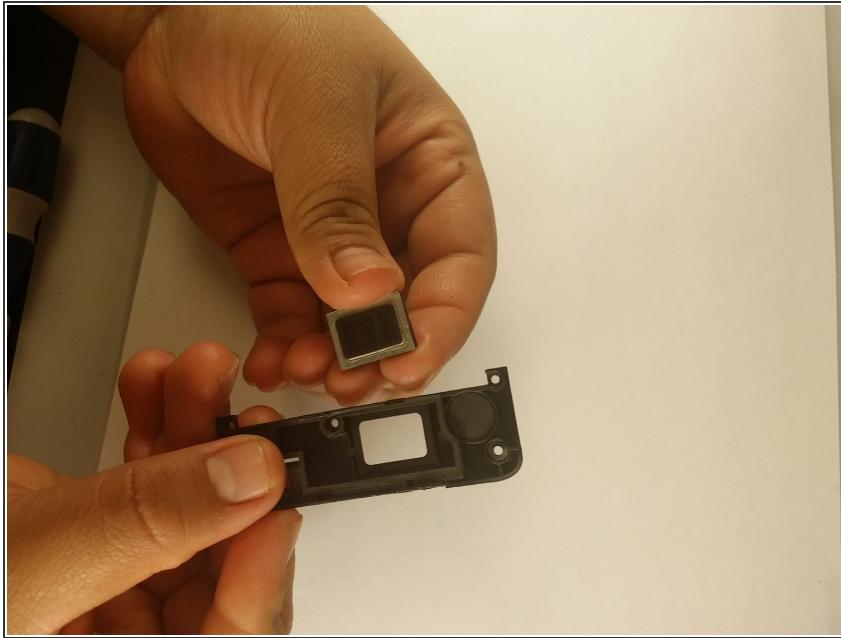

- Remove the speaker from the backing of the speaker holder.

## Step 6 — Replace speaker.



- Replace the old speaker with a new speaker. Put it back in where the old speaker was.

## Step 7 — Put the screws back on



- Insert the plastic backing of the speaker back in the phone.
- Put the six screws back in the backing of the phone to hold the plastic backing securely.

To reassemble your device, follow these instructions in reverse order.