



Back Panel Disassembly

How to take off the back and unscrew the 10 screws inside your Samsung Galaxy J7.

Written By: Timothy Grubb



 **TOOLS:**

- Phillips #000 Screwdriver (1)

Step 1 — Back Cover



- Take off the back by pulling on the tab near the top left of the back of the device.

Step 2 — Battery



- Pull out the battery by pulling on the bottom left slit under the battery.

Step 3 — Back Panel Disassembly




- Take out the battery before unscrewing the screws.

Step 4



- Using the Phillips screwdriver bit size 000, unscrew out all 10 4.19mm screws.

Step 5

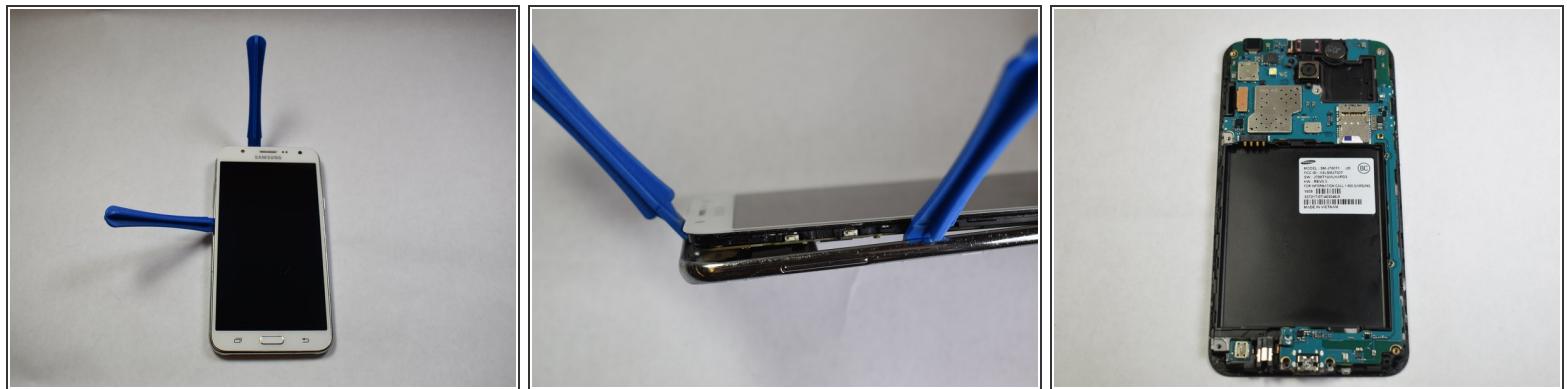

- Use the iFixit Opening Tool to lift up the back, to disconnect the back with the inside of the device.

To reassemble your device, follow these instructions in reverse order.