




Batterieausbau

It shows how the battery is removed.

Written By: Leonard Kesting

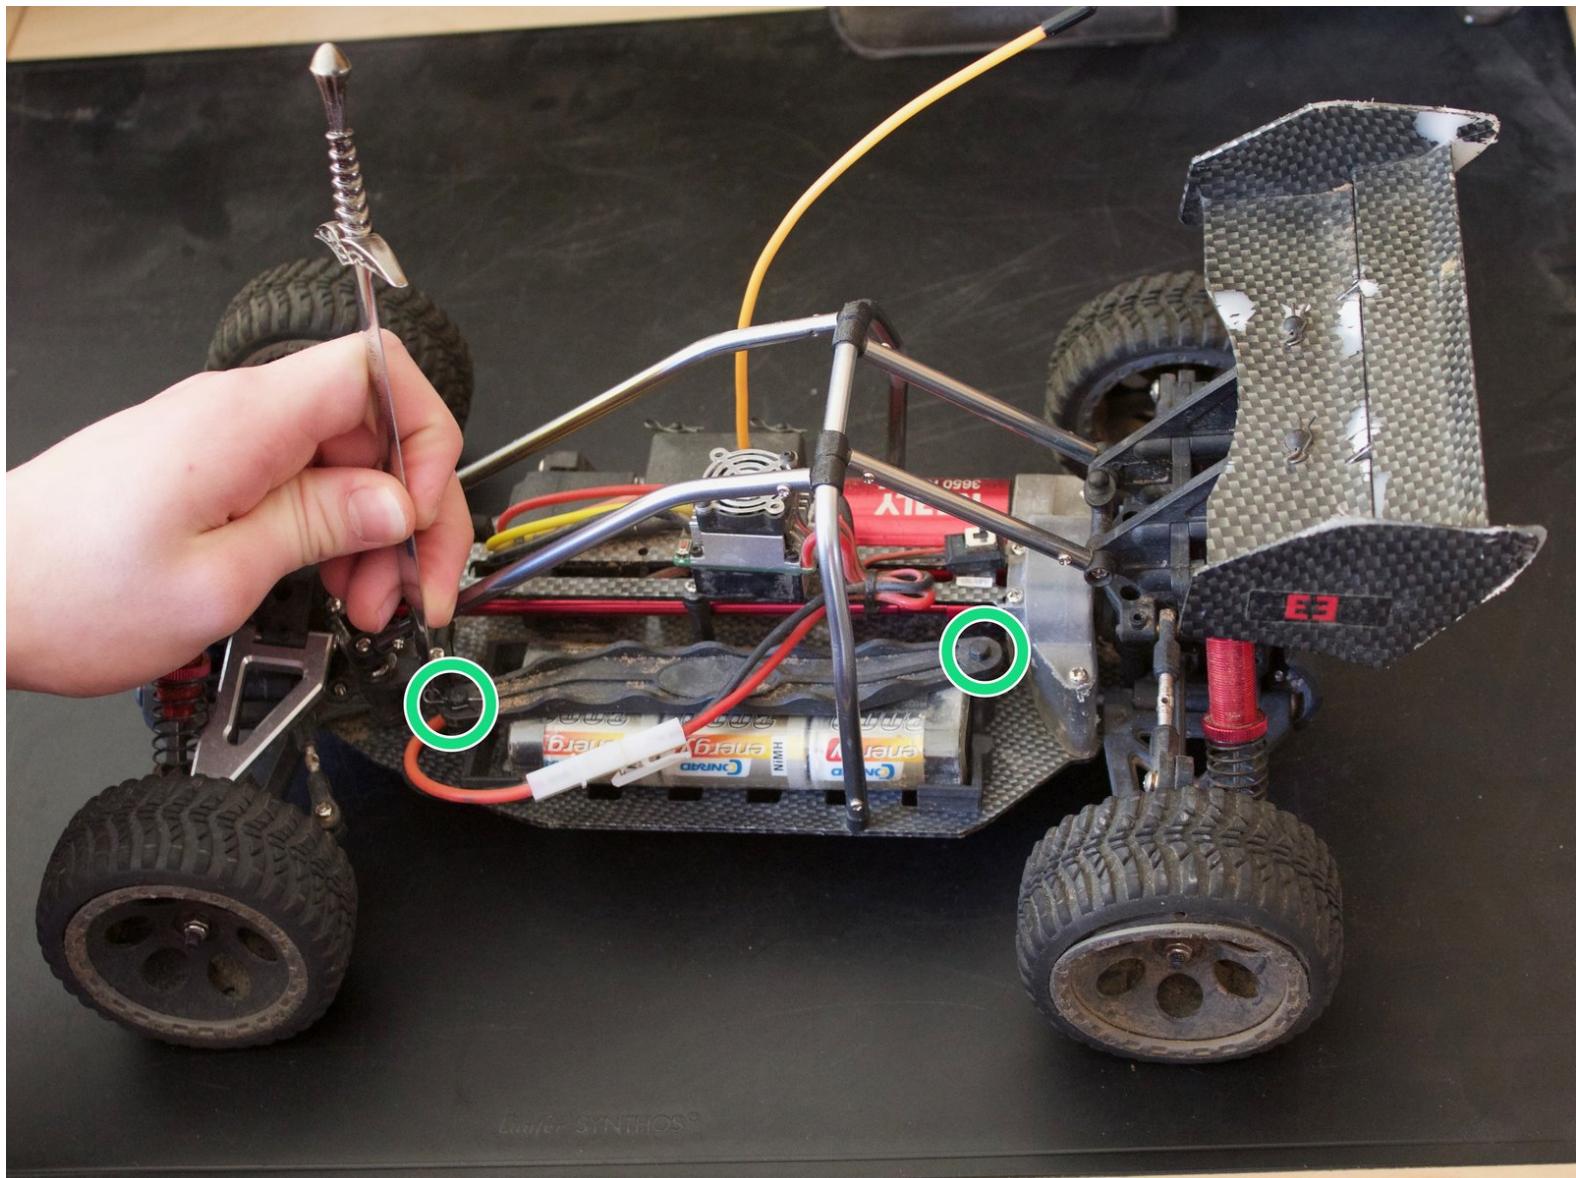

INTRODUCTION


It shows how the battery is removed....



PARTS:

- **New Item (1)**
NiMh 2000mAh
möglicher Akku
- **New Item (1)**
falls gebrochen oder verloren

Step 1 — trim loss

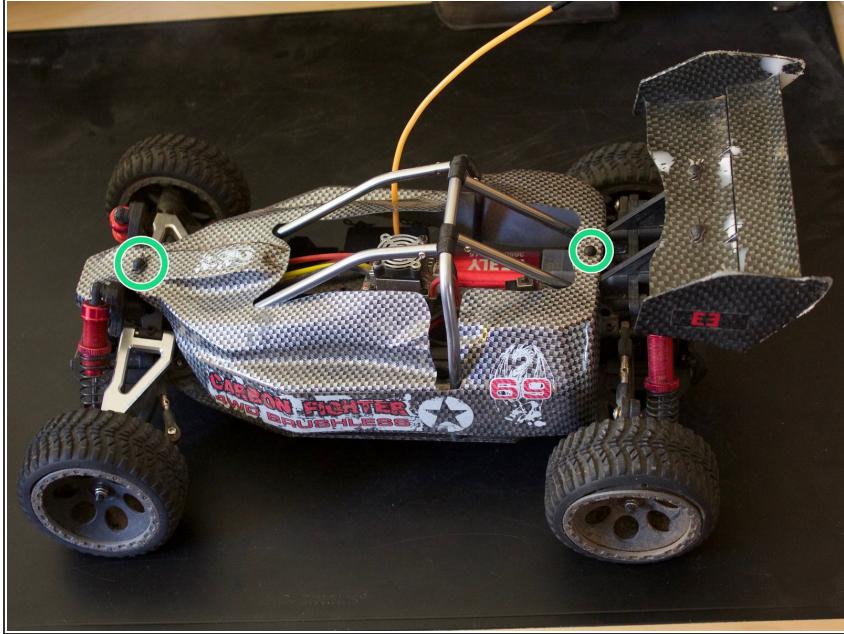


- These two pins must be removed.

Step 2




- Here, a screwdriver or other stable thin object (in the picture: letter opener) can be helpful

Step 3

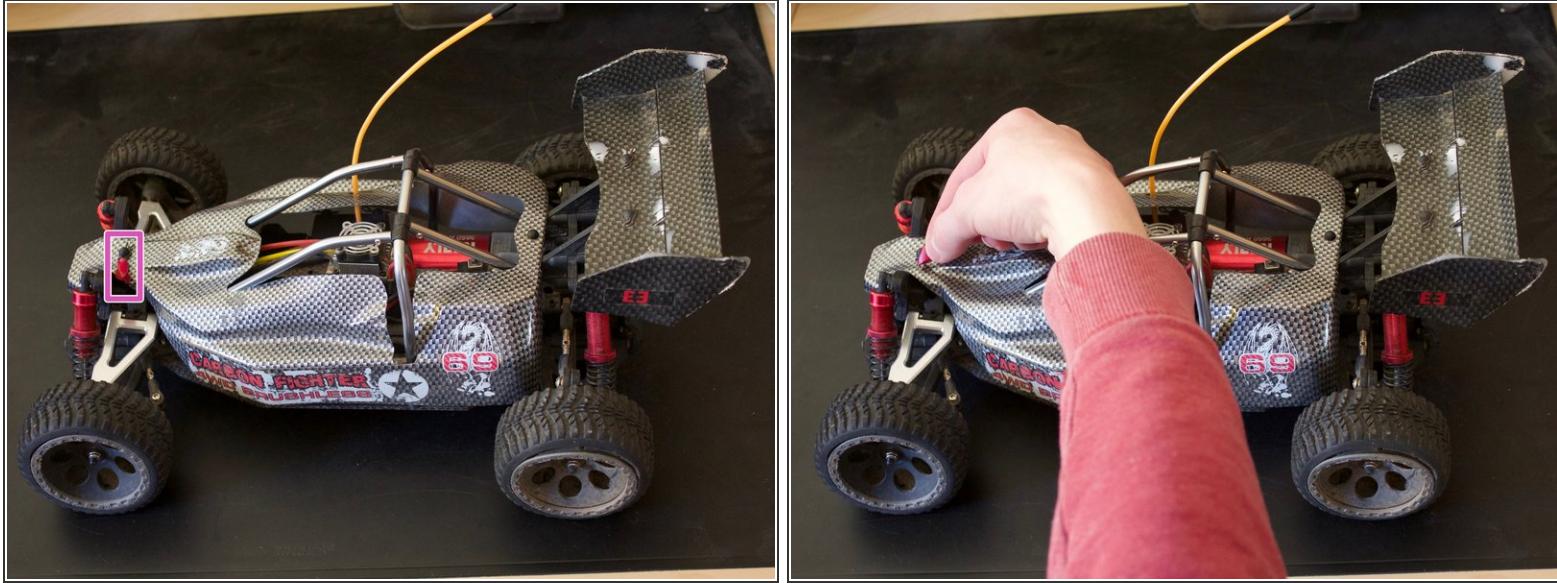


(i) TIP: if you remove the cladding more often (for example, for thorough cleaning), it may be helpful to provide the splints with some insulating tape, so the use of tools is unnecessary

Step 4

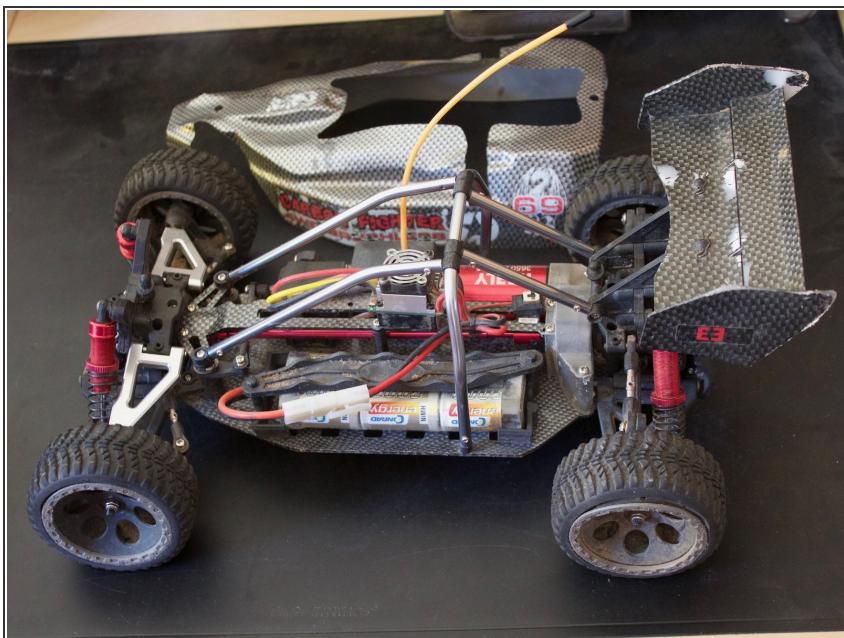


- The panel is now dismantled

Step 5 — Batterieausabau

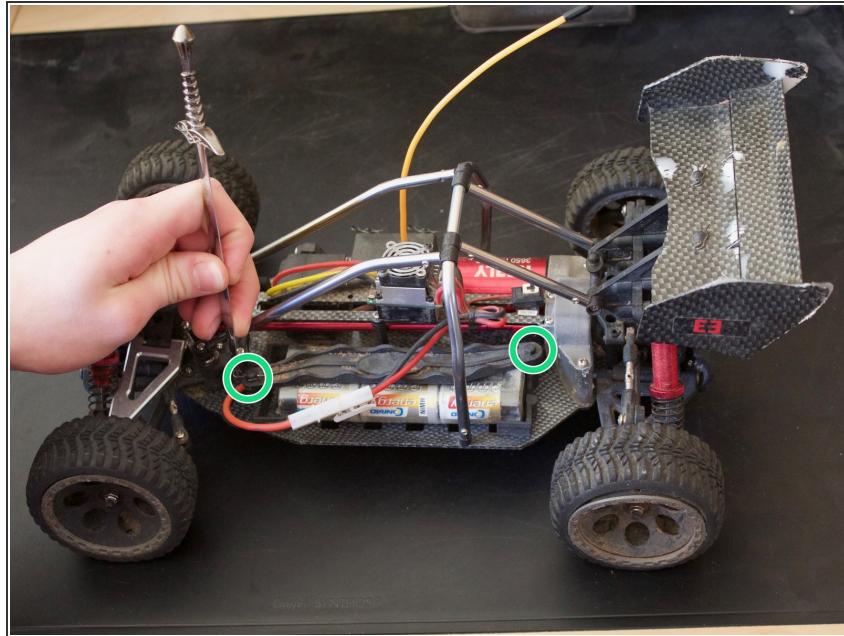


- These two pins must be removed

Step 6

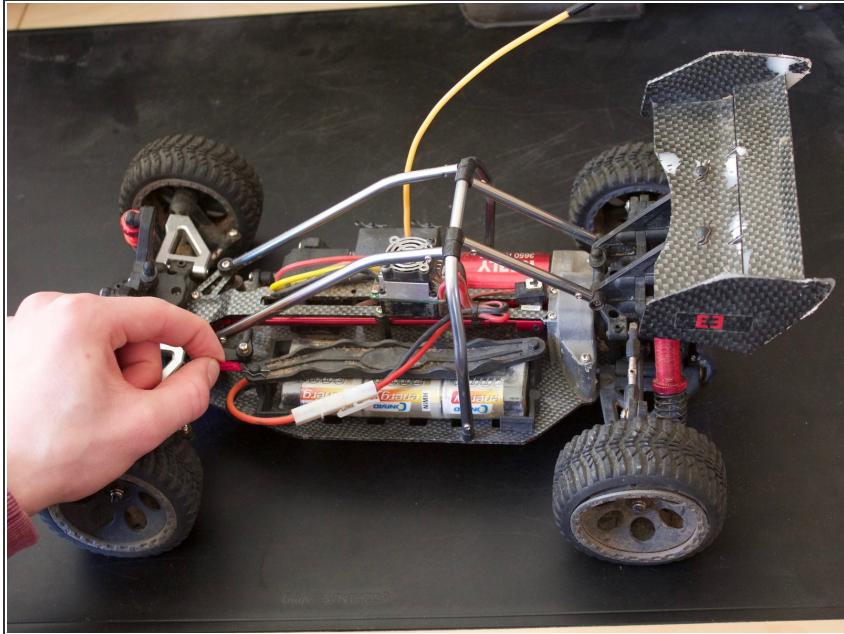


i TIP: Since this work has to be done more often, it is recommended to provide the cotter pins with some insulating tape so that they can be removed without tools

Step 7

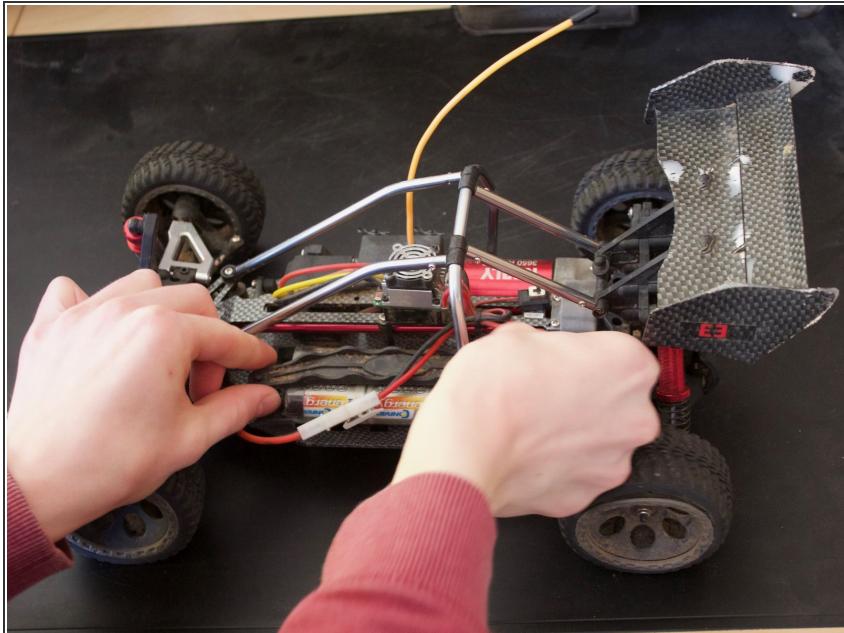



- The battery holder can now be pulled off upwards

Step 8

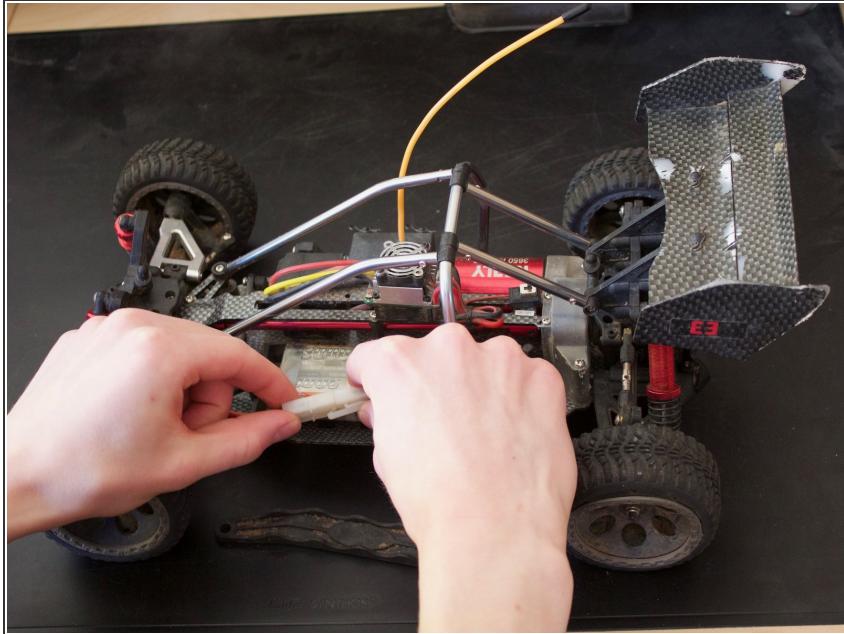


- Now the battery connection is disconnected

Step 9

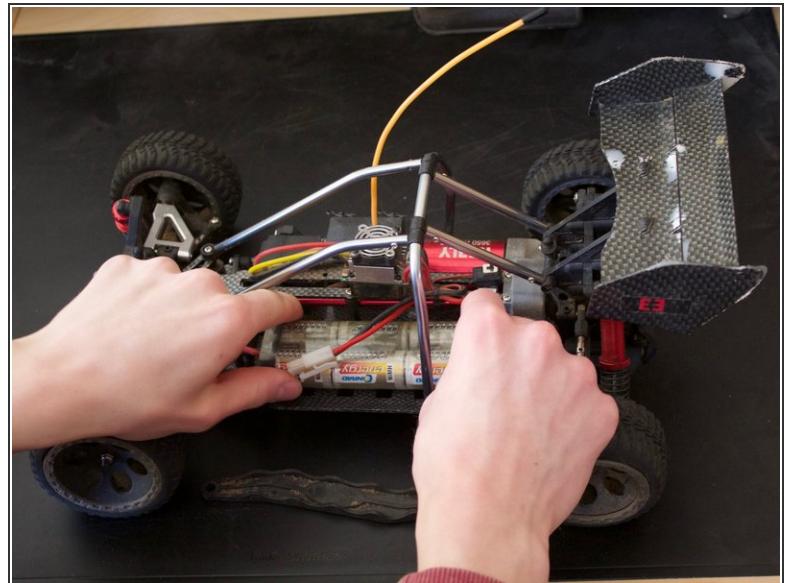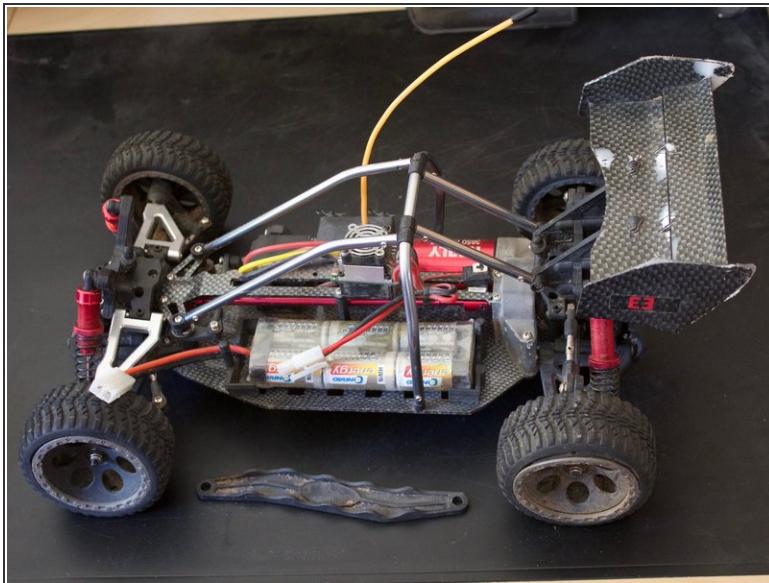

- And the battery can be removed upwards

Step 10

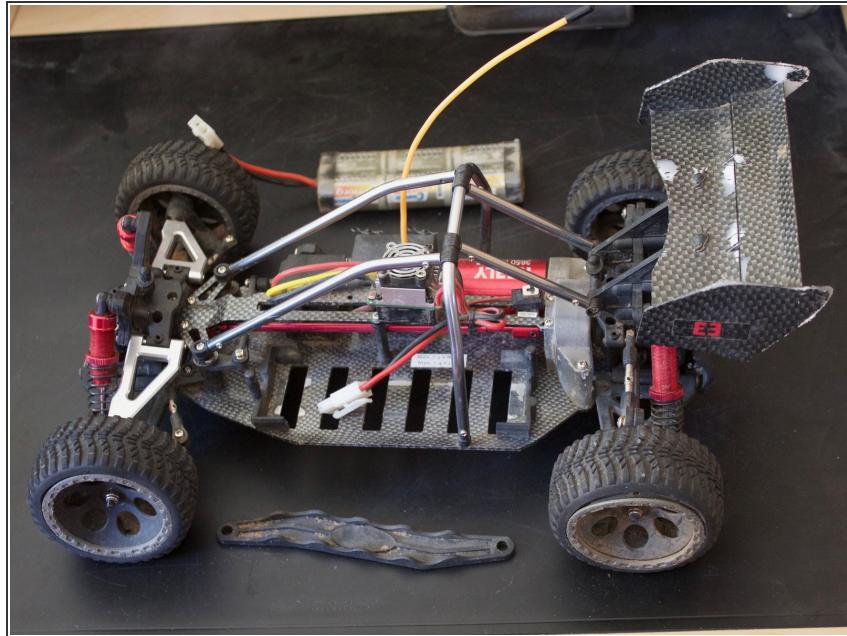

- The battery can now be charged

Repeat the steps in order to reassemble your device.