




Besta Super 5000 Back Cover Replacement

Remove the plastic back covering.

Written By: Jessie

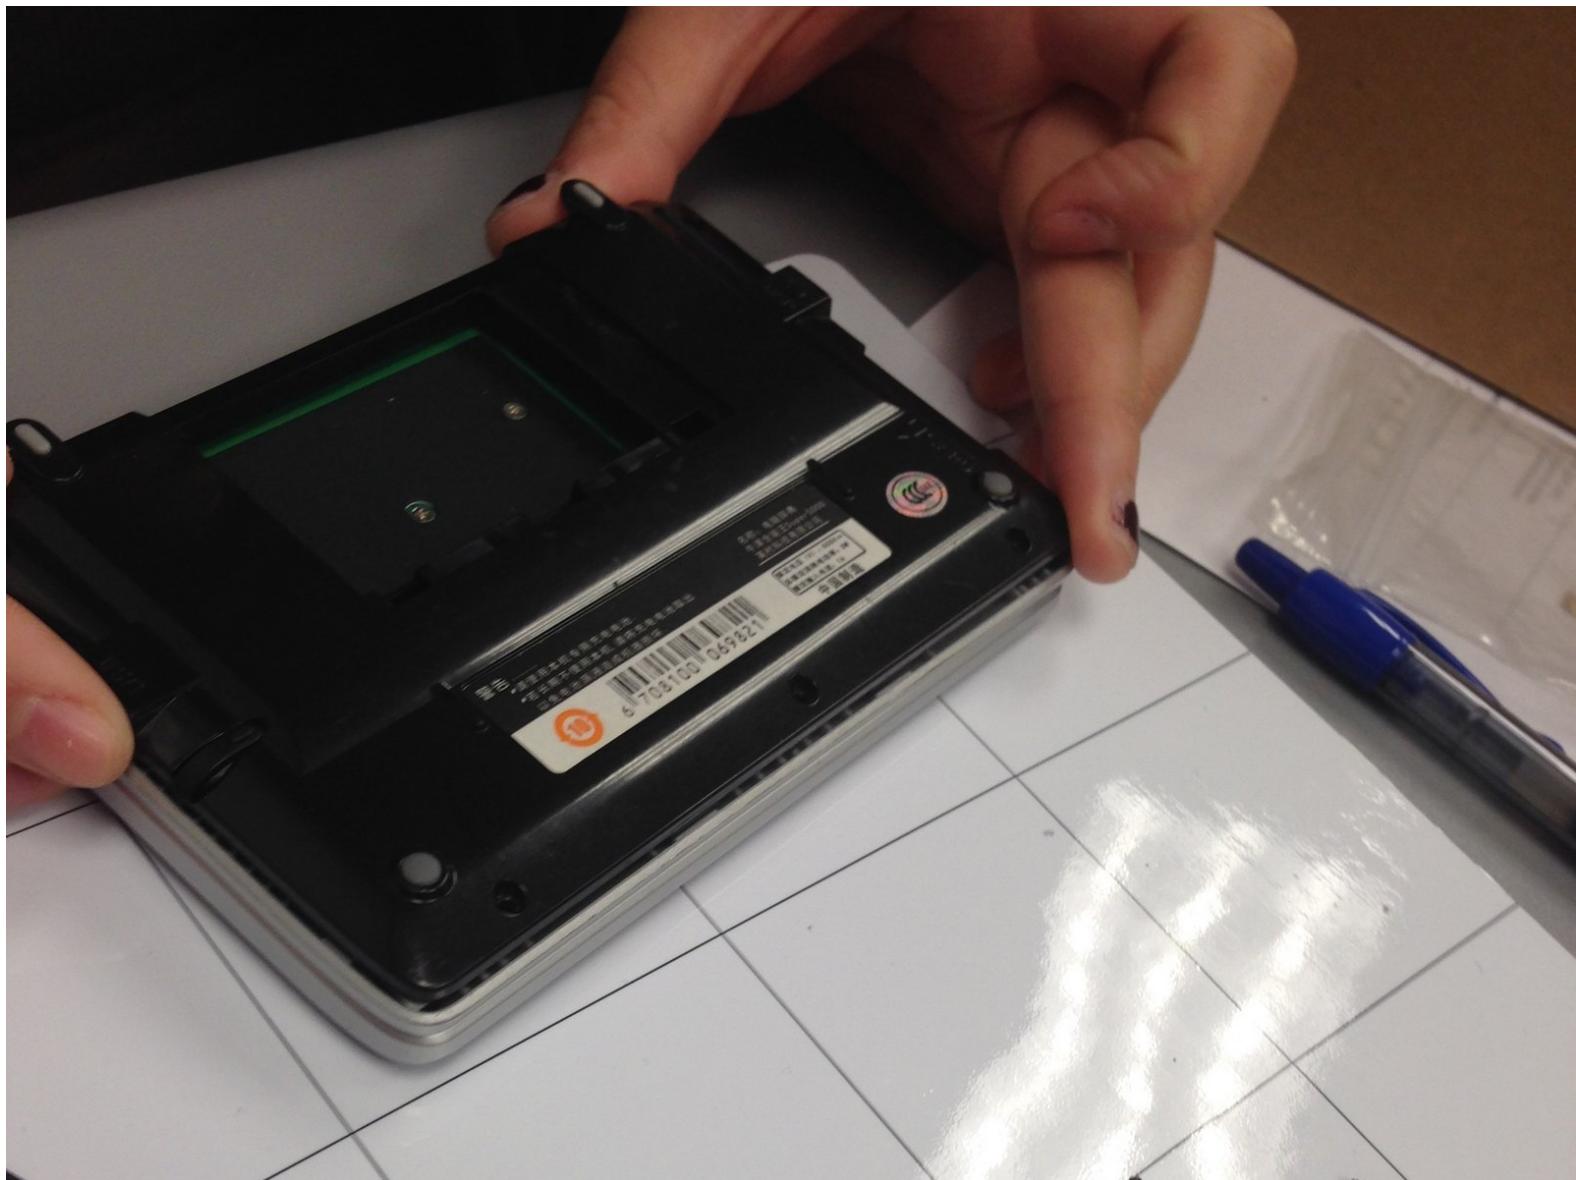

 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery




- Flip the device on its back.

Step 2




- Slide off the battery panel with your fingers.

Step 3

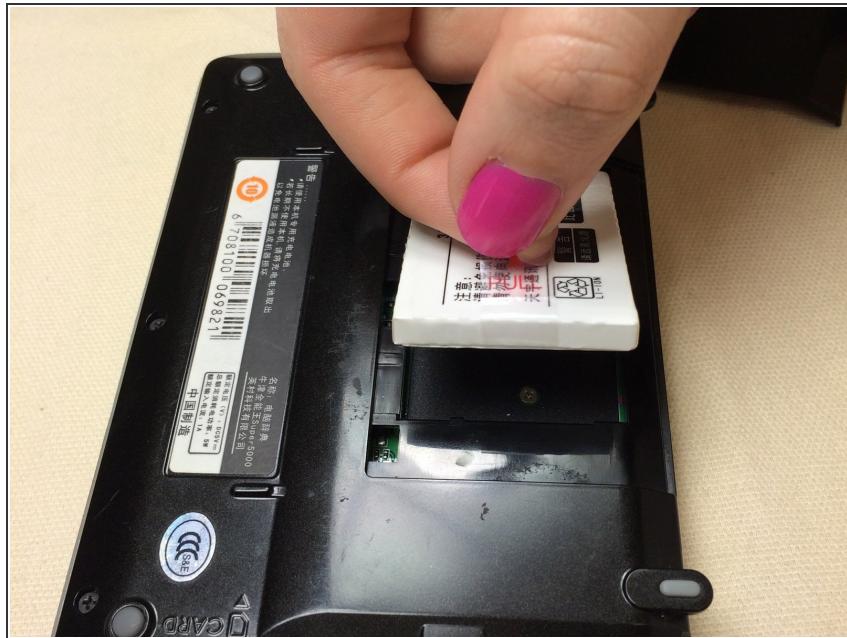

- Pull the plastic tab on the battery to remove it from the device.

Step 4 — Back Cover

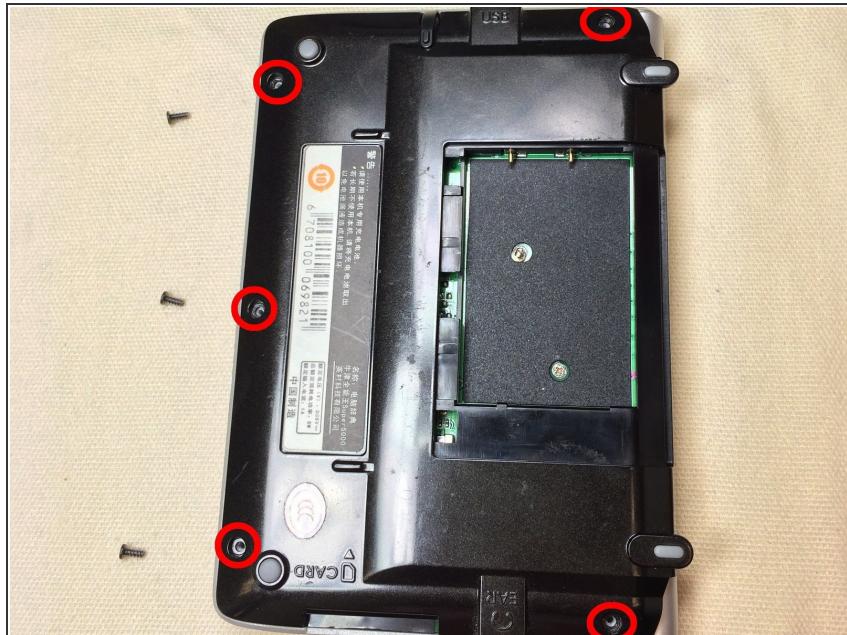


- Remove the five screws around edge of device using Phillips #0 screwdriver.

 **WARNING:** Be careful not to lose the screws because they are needed for reassembly.


 **TIP:** Keep each group of screws together to help with reassembly since some vary in size.

Step 5

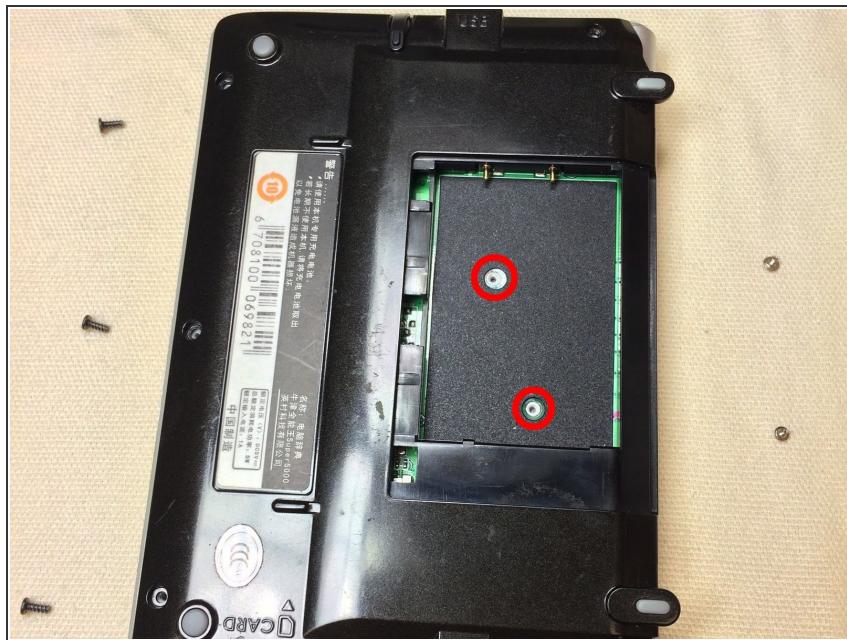

- Remove the two screws behind the battery using a Phillips #0 screwdriver.

Step 6

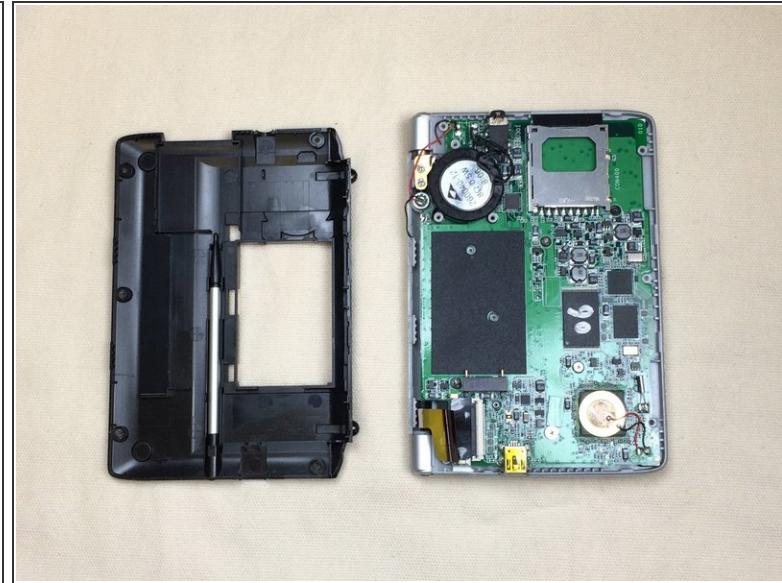

! **WARNING:** All screws must be removed before you begin this step. Do not forcefully pry apart the device with screws still in it because you may damage it.

- Gently pry off the backing using flat blue iFixit opening tool.

To reassemble your device, follow these instructions in reverse order.