



# BlackBerry 7510 LCD Screen Replacement

How to replace a BlackBerry 7510 LCD screen.

Written By: Neil Johnson



## INTRODUCTION

This guide demonstrates how to remove and replace the LCD screen.

### TOOLS:

- T6 Torx Screwdriver (1)

## Step 1 — Back Face of Phone



*i* Remove the battery cover and battery before continuing.

- Remove the six T6 Torx screws on the back of the phone.
- Make sure to keep the screws somewhere that they will not get lost.

## Step 2



- Using your finger nail or a spudger, carefully pry up the back cover.
- Begin in one spot and slowly circle around the device as you pry up all of the back cover.

## Step 3




- Lift off the back cover.

## Step 4



- Remove the two T6 screws.

## Step 5

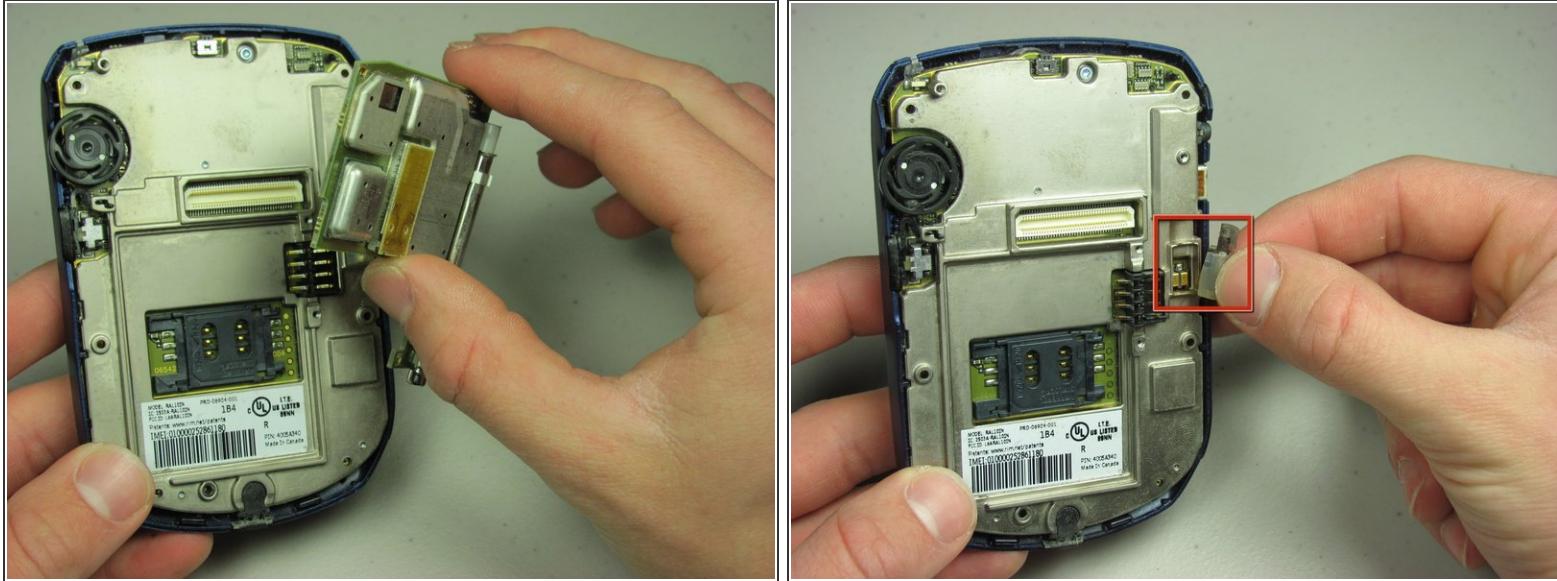



- Remove the daughterboard.
- Remove the exposed vibration motor.

## Step 6 — LCD Screen




- Unscrew the screw holding the back plate.

## Step 7

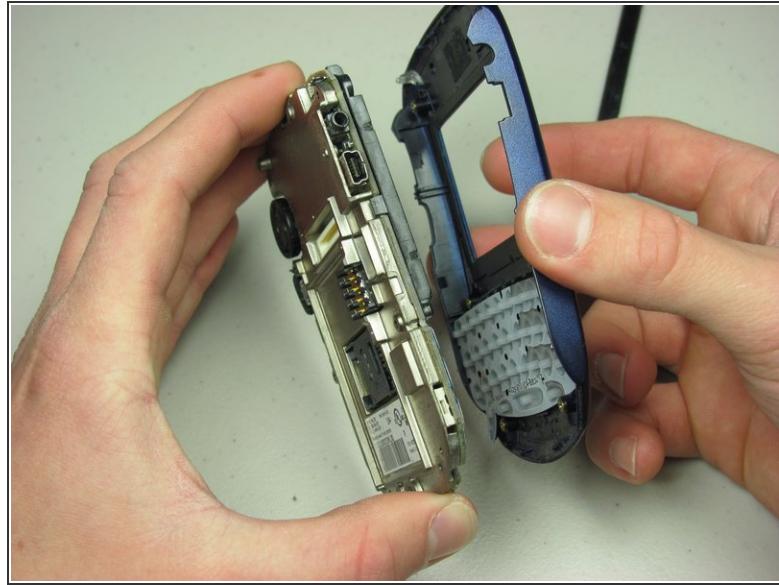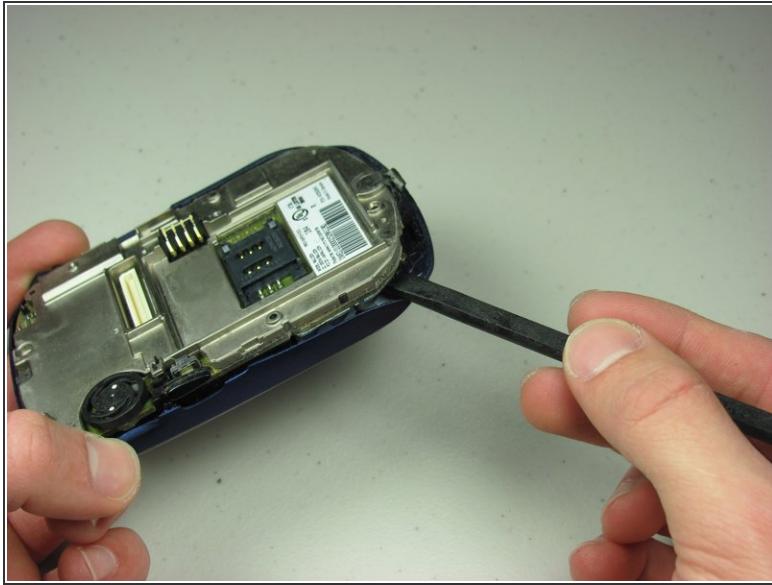


- Carefully pry off front cover. Make sure the plastic clips are unlatched before applying force.
- Lift off front cover from metal plate.

## Step 8

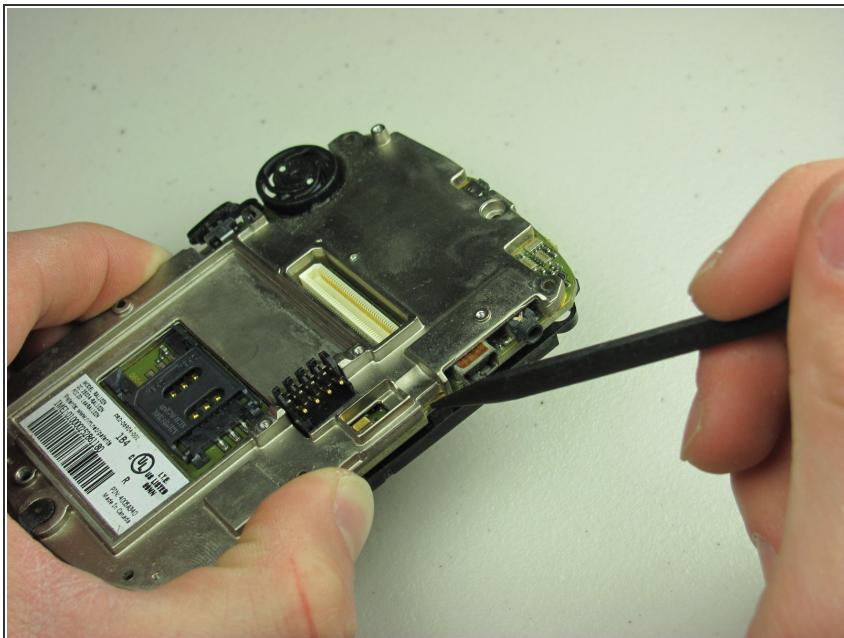

- Pry off the LCD screen with spudger at the two clips.

## Step 9

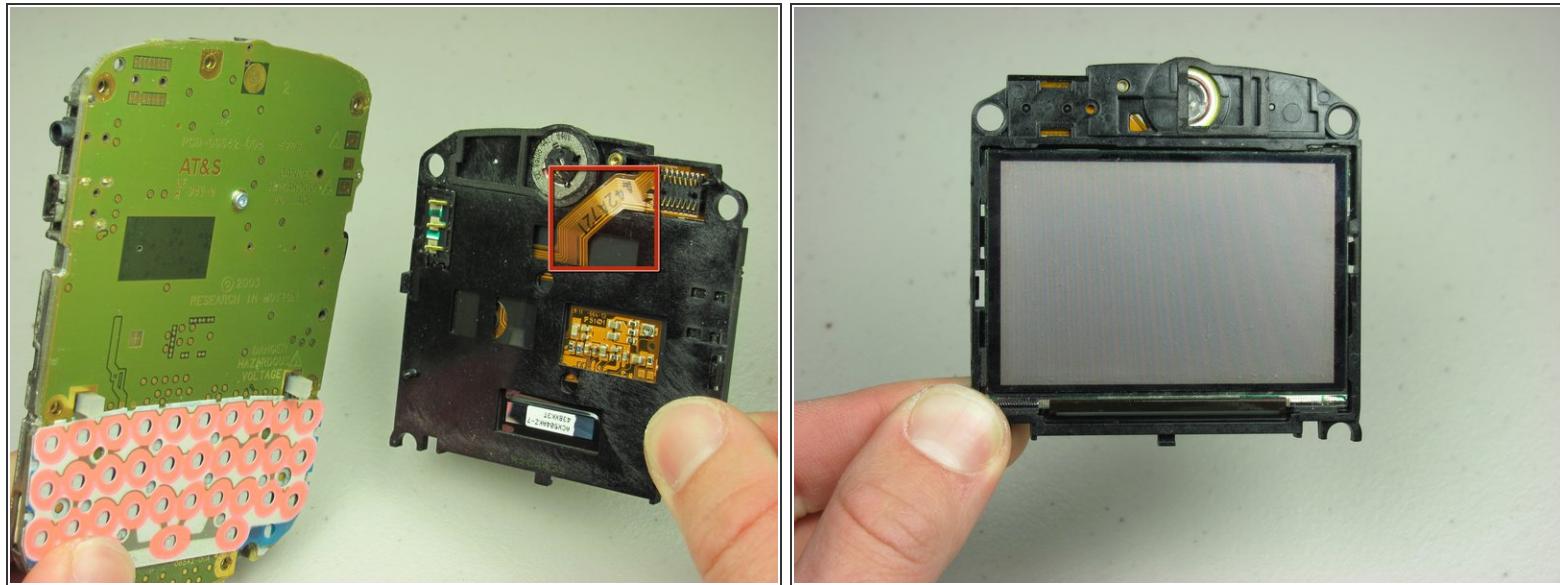

- Remove the LCD screen and replace it with a new one.

! Careful not to rip the LCD ribbon.

To reassemble your device, follow these instructions in reverse order.