




# BlackBerry Storm 9530 Logic/Motherboard Replacement

Just a quick and easy disassembly of RIM's Blackberry Storm.

Written By: Josh Forester

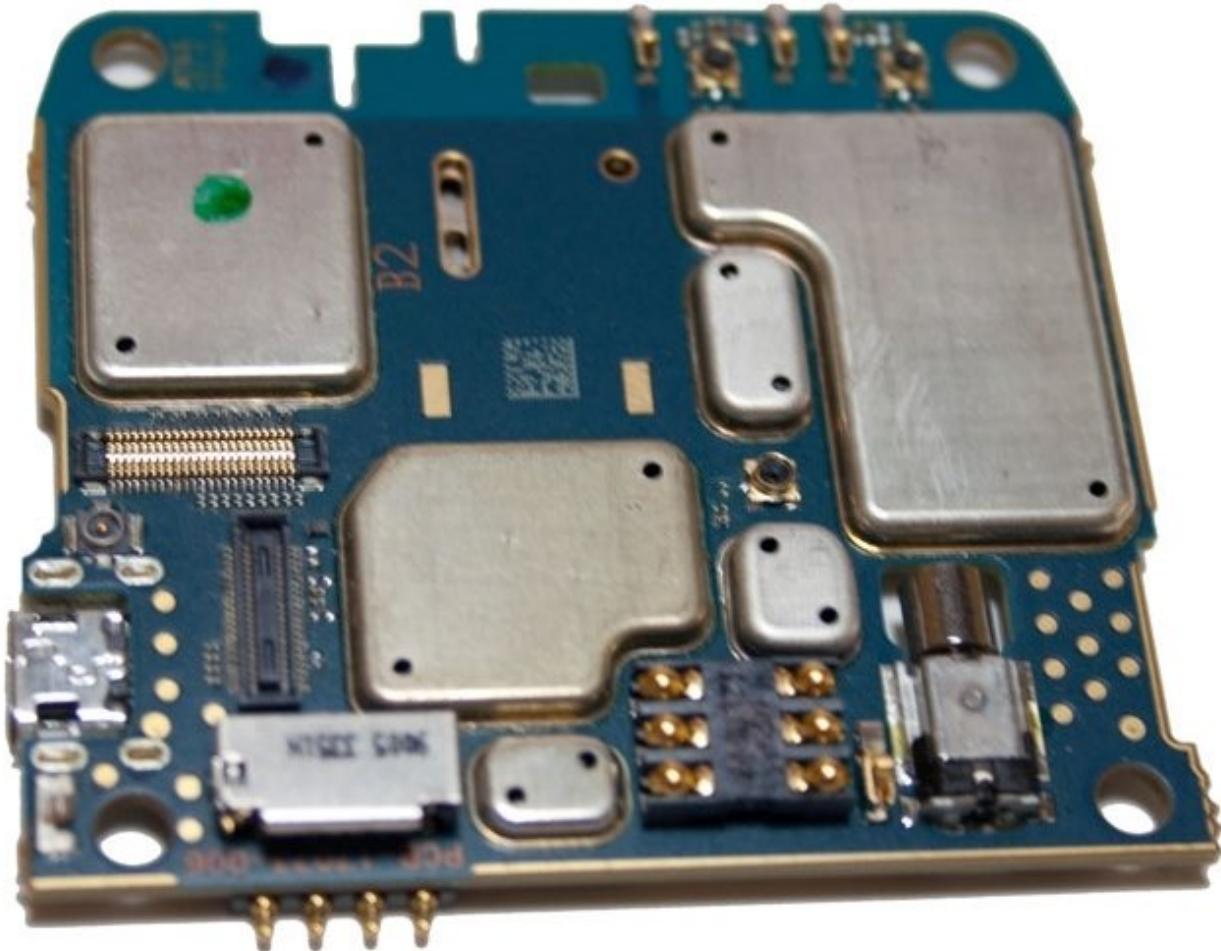

## INTRODUCTION

Need to get inside your BlackBerry Storm to fix it? Or just want to salvage parts? This is an easy to follow guide to do it!

### TOOLS:

- Essential Electronics Toolkit (1)

## Step 1 — Motherboard




- Have a cracked screen? Need to replace your speaker? Etc? Well just follow these steps.

## Step 2





- Turn your Storm where the battery door is facing up.
- Remove the battery door.
- Remove the battery.

## Step 3

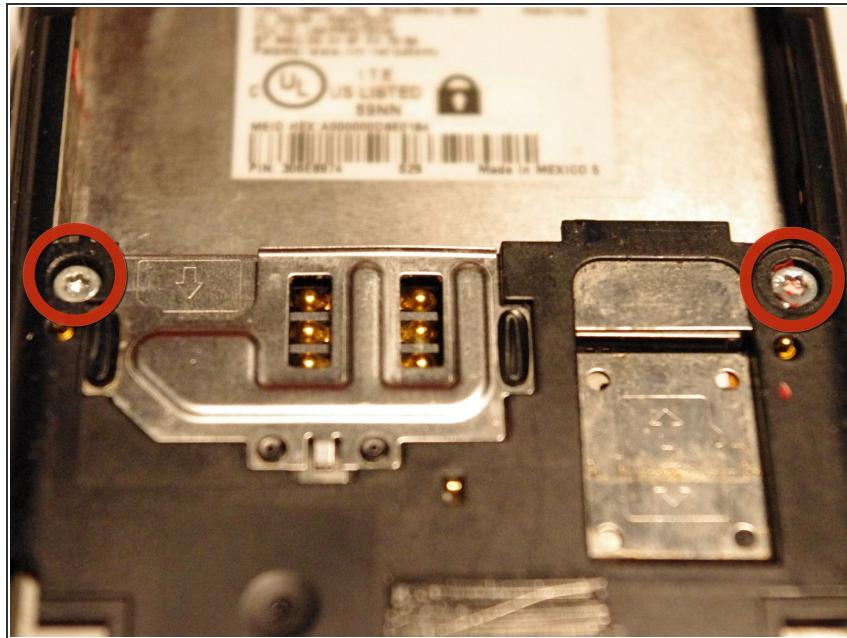

- Remove the two hex screws as shown by the SIM card slot.

## Step 4

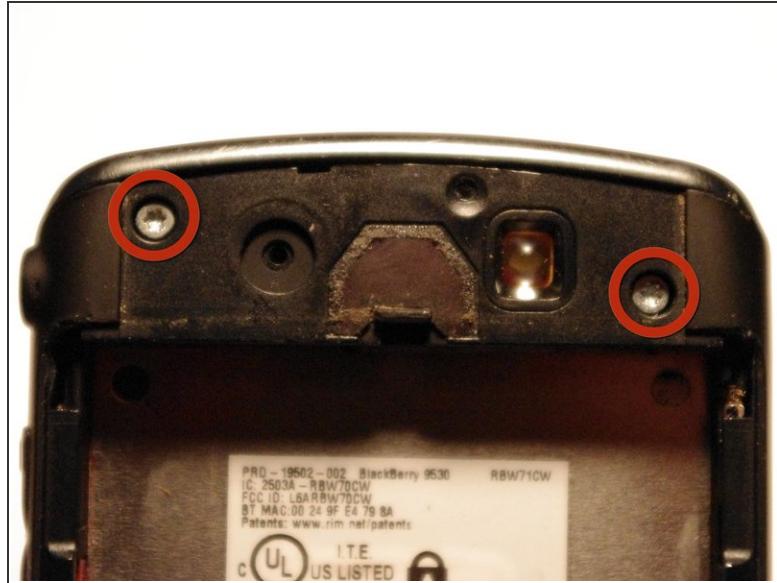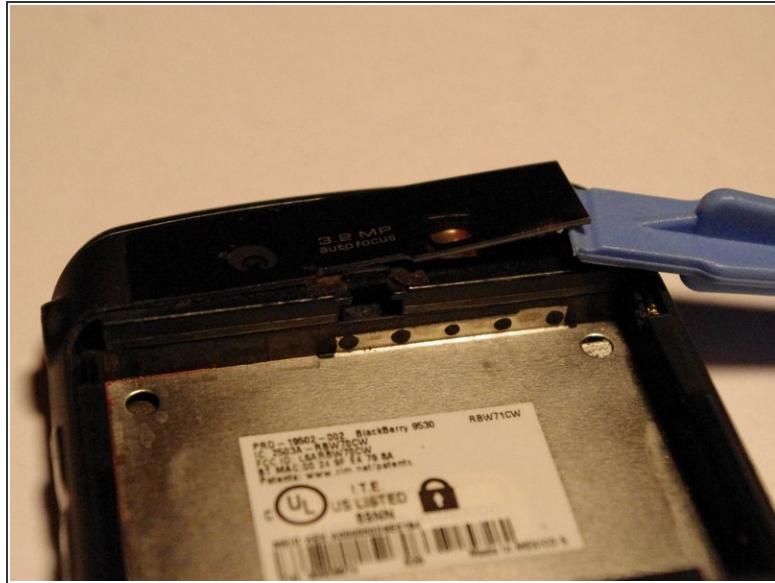


- Remove the plastic piece that covers the camera & flash on the back . This is held in with some tape so use a safe pry tool.
- Remove the two hex screws underneath it.

## Step 5



- Turn the phone over and remove the plastic cover under the buttons as shown.
- Remove the 2 screws underneath.

## Step 6

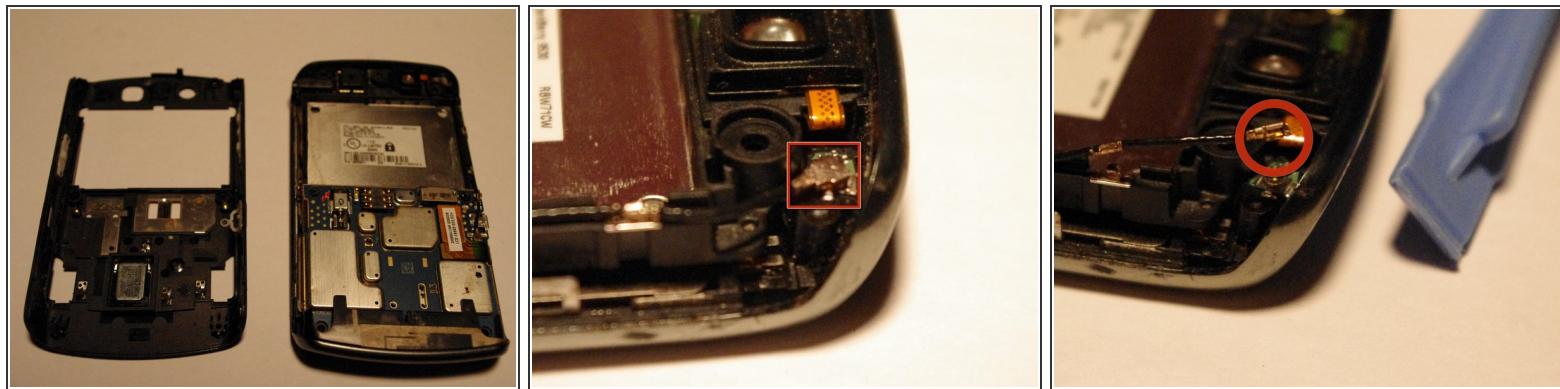

- Go around your device with the plastic pry tool, there a 3 clips on each side of the housing.
- There is a connection for the antenna from the front to mid housing. Remove it with a pry tool if it does not come off by itself.

## Step 7






- You now have 3 pieces. The rear, mid , & front housing.

## Step 8



- To remove the screen gently pry up this ribbon cable with a pry tool.

## Step 9

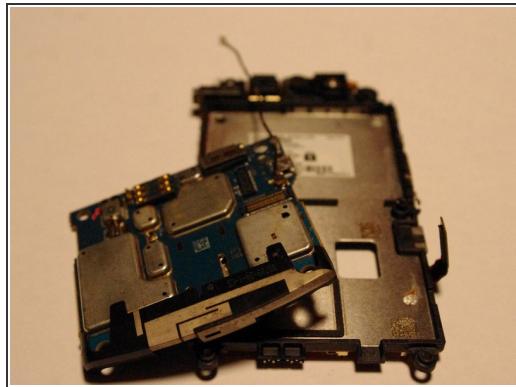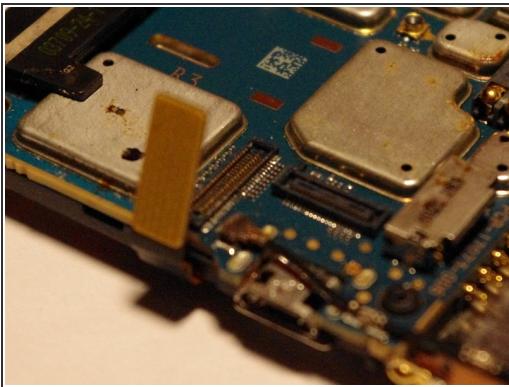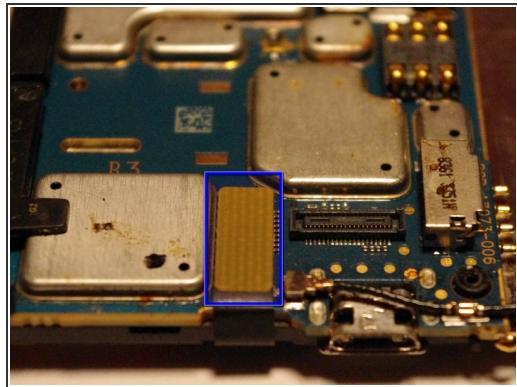

- To remove the main board from the mid housing disconnect the ribbon cable as pictured.
- Now follow in reverse order for reassembly!

To reassemble your device, follow these instructions in reverse order.