




# BlackBerry Torch 9860 Handset Disassembly

My dog got hold of the phone and tried to eat it! It requires multiple components and the silver bezel is completely missing. This is a guide to completely disassemble the phone.

Written By: daniel

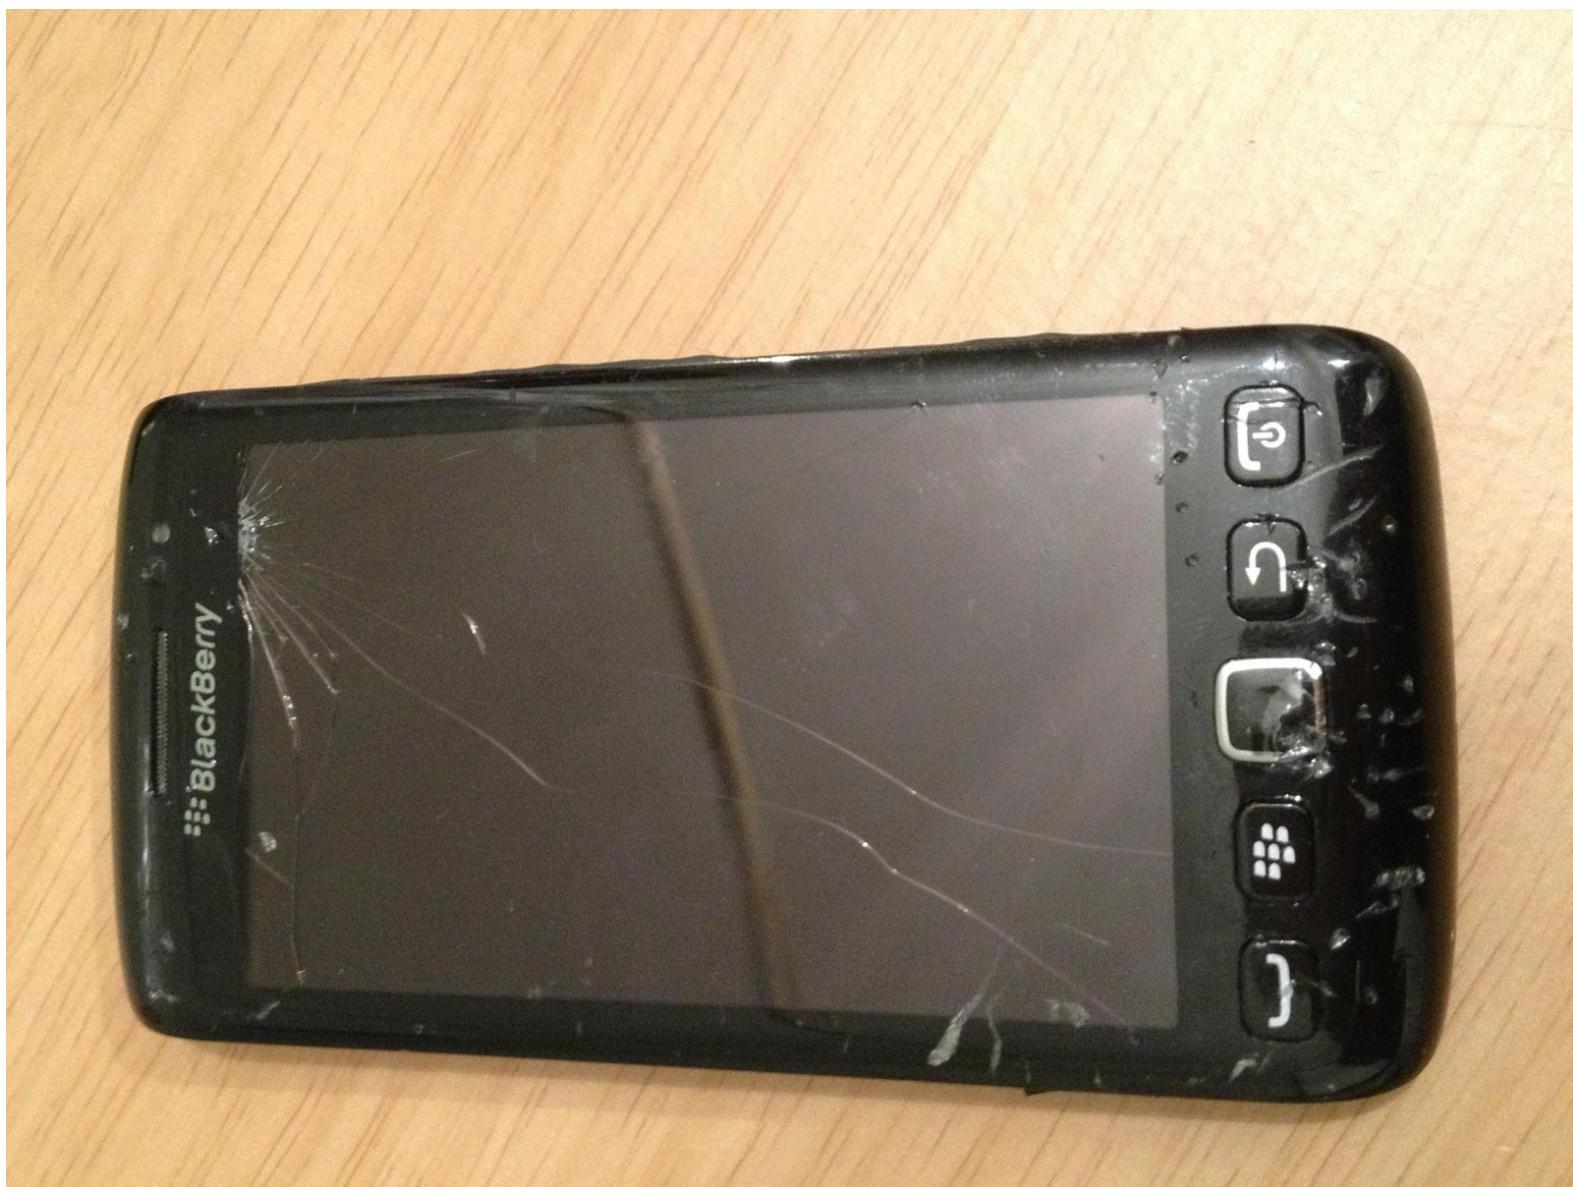

 **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

## Step 1 — BlackBerry Torch 9860



- Depress the battery cover release button and remove the battery cover
- Remove the battery from the phone before continuing.
- Slide the yellow button toward the battery to eject the SIM card
- Remove the MicroSD card from the SD slot (if present)

## Step 2



- There will be a silver bezel around the edge (the dog ate mine!)
- Insert pry tool near the padlock icon and gently work your way around the bezel to pry it off and reveal the screws.

## Step 3



- Grab your T5 Torx screwdriver, and remove all 8 screws


**⚠** Be careful when taking out screws. The silver ones go in the corners, black ones in the middle

## Step 4




- With the 8 screws removed, you can gently pry the back cover off. Be gentle, as it is still connected by a ribbon cable
- Gently pry ribbon cable off, and then you will have the back cover fully removed

## Step 5

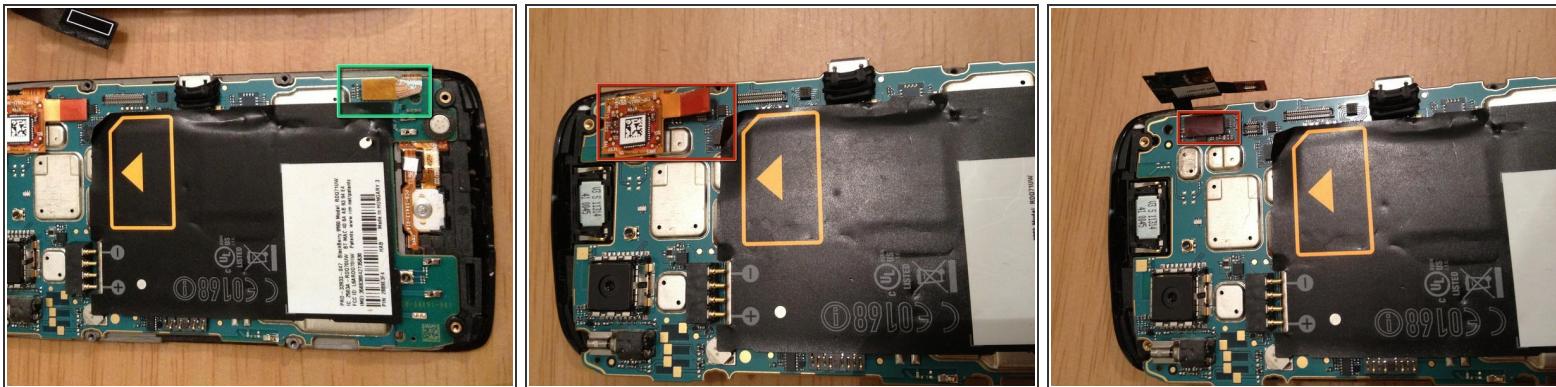

- The next step is to remove the board.
- There are 3 ribbon cables connected to it
- Disconnect the first ribbon cable
- When you remove the second ribbon cable it will reveal the third ribbon cable

## Step 6

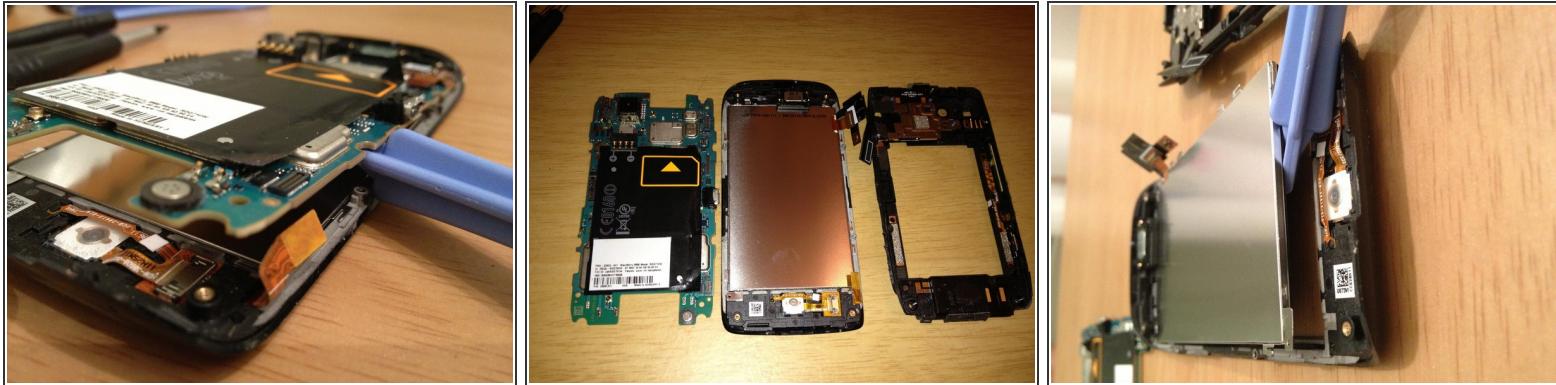

- With the 3 ribbon cables disconnected you can gently pry the board up and away from phone
- With the board removed, you can then simply lift out the LCD display

## Step 7



- Once the LCD is removed, the handset disassembled.

To reassemble your device, follow these instructions in reverse order.