



# BlackBerry Tour 9630 Keypad Replacement

Replace your damaged BlackBerry Tour 9630 keypad.

Written By: Mia



## INTRODUCTION

If your buttons are unresponsive or become difficult to push, then your keypad is probably damaged or dirty. Use these step-by-step instructions to replace your BlackBerry Tour 9630 keypad.

### **TOOLS:**

- [T6 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

### **PARTS:**

- [BlackBerry Tour 9630 trackball](#) (1)

## Step 1 — Battery




- Flip phone over so the back side is facing up.

## Step 2



- Push up on the center silver button to release the back cover.
- Remove the back cover.

## Step 3

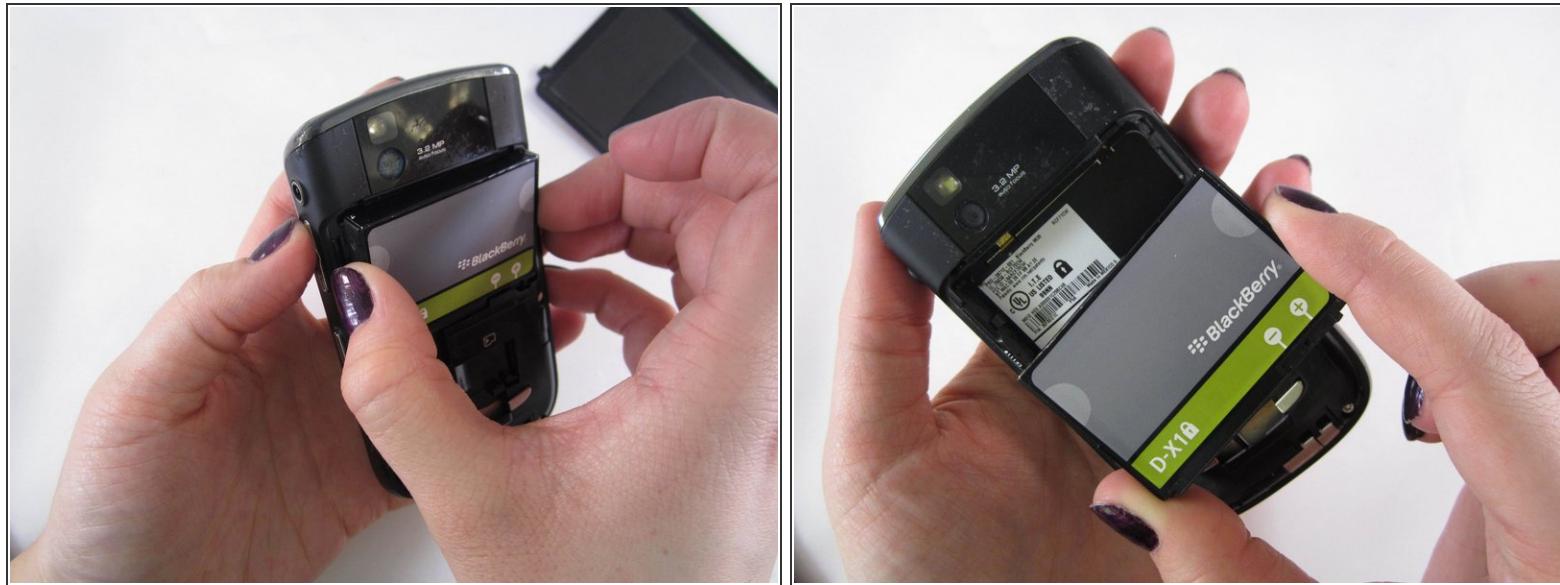

- Grip the battery where the light grey half circles are located and pull up on the battery.
- Remove the battery.

## Step 4 — Keypad



- If there is an SD card, press gently on the card and slide up to remove.
- If there is a SIM card, press gently on the card and slide left to remove.
- Use the T6 Torx screwdriver to remove the four 8.00mm screws from the back of the phone.

## Step 5



- Using the large blue plastic opening tool, pry the top plastic covering off.
- ⓘ There is glue holding the top plastic covering. Additional pressure may be needed.

## Step 6




- Use the T6 Torx screwdriver to remove the two 8.00mm screws from the top of the phone.

## Step 7



- Remove the back casing by wiggling it open.

## Step 8

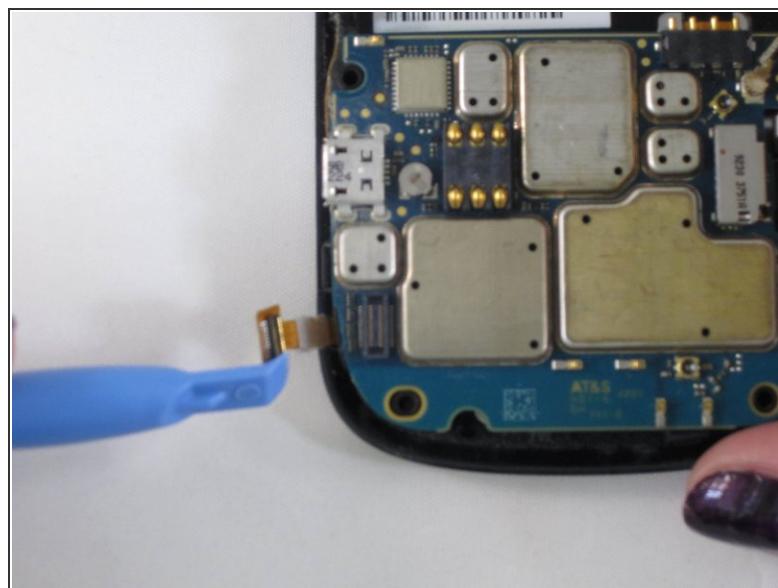


- Using the small plastic opening tool, pry up the pop ribbon cable from the motherboard.

## Step 9



- Using the small plastic opening tool, remove the side antenna cable.

## Step 10

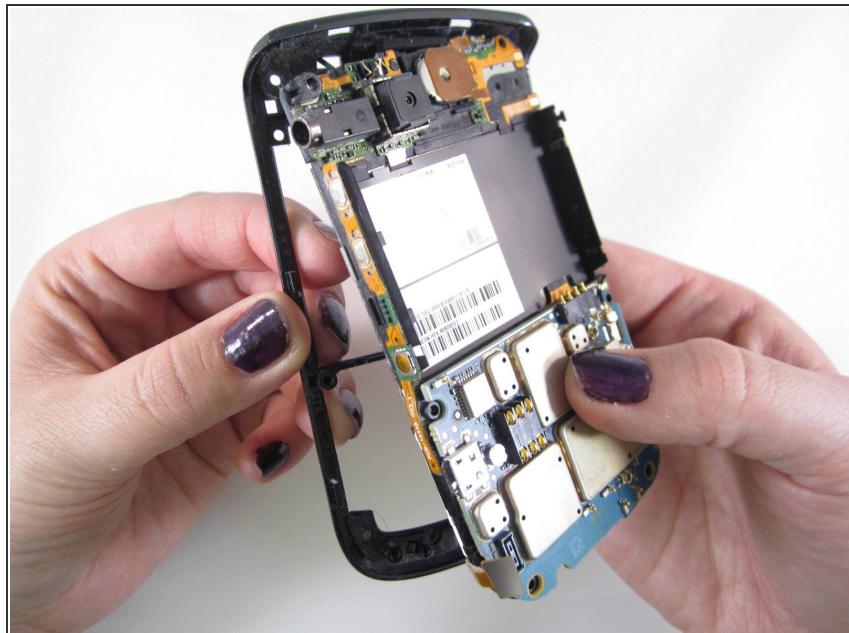

- Gently push up on the keyboard and snap the front cover off.

*ⓘ* Once you remove the front cover, the keypad and trackball will be loose.

## Step 11



- Remove the keypad.

To reassemble your device, follow these instructions in reverse order.