



# BlackBerry Z30 Display Assembly Replacement

Use this guide to replace a cracked front panel or a broken LCD of a BlackBerry Z30

Written By: Hans



## INTRODUCTION

This guide will allow you to safely replace the LCD panel of your BlackBerry Z30 unit.

### TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)

### PARTS:

- [BlackBerry Z30 LCD Panel](#) (1)

## Step 1 — Battery cover



- Remove the battery cover by grabbing the notch under the bottom speakers and lifting.

## Step 2 — Remove SIM and Media Card




- Remove the SIM card and the Media SD card by pushing on them.

## Step 3 — Unscrewing the LCD panel



- Locate and unscrew all 10 T5 screws around the back cover

## Step 4 — Separate the LCD from the Frame


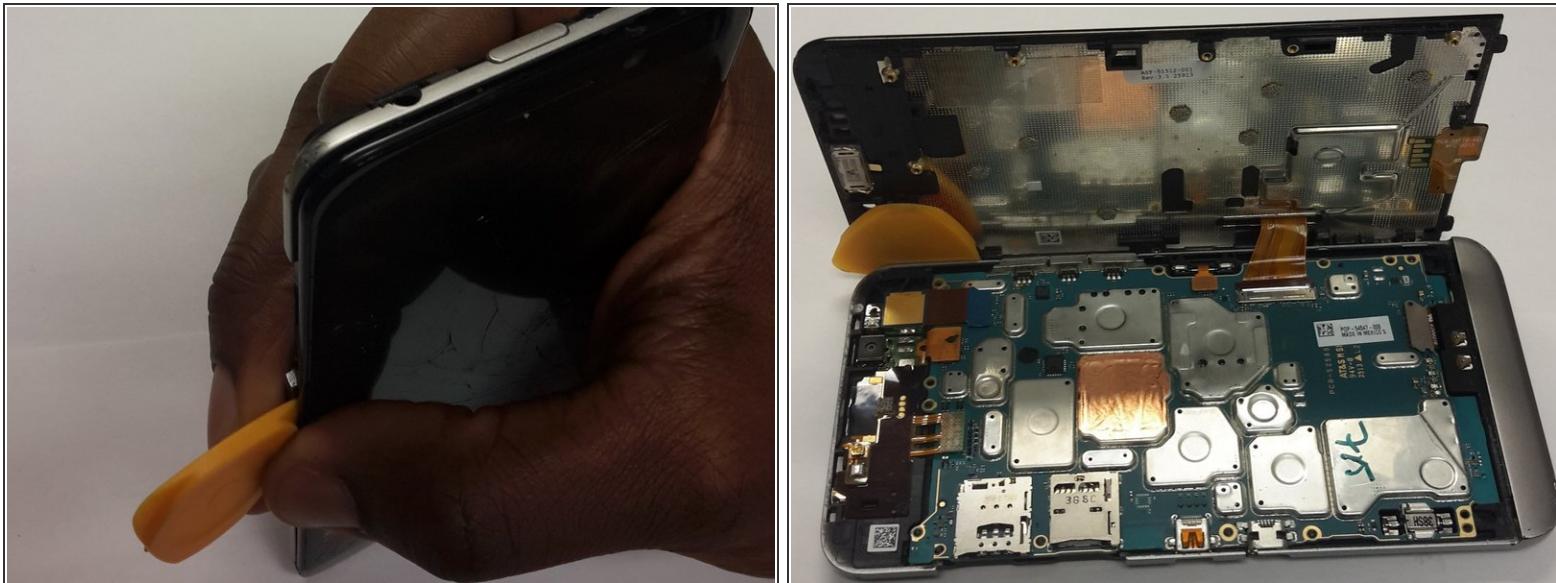


- Use Plastic opening tools to separate the LCD from the Main body

**⚠** Do NOT remove the screen yet, it is attached with a very fragile ribbon to the main board.

**ⓘ** Start on the same side of the Audio Jack

## Step 5 — Remove the LCD

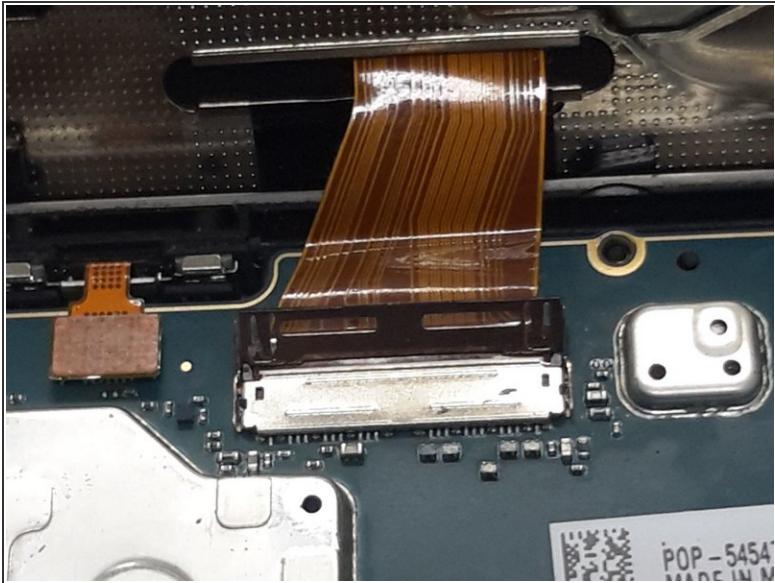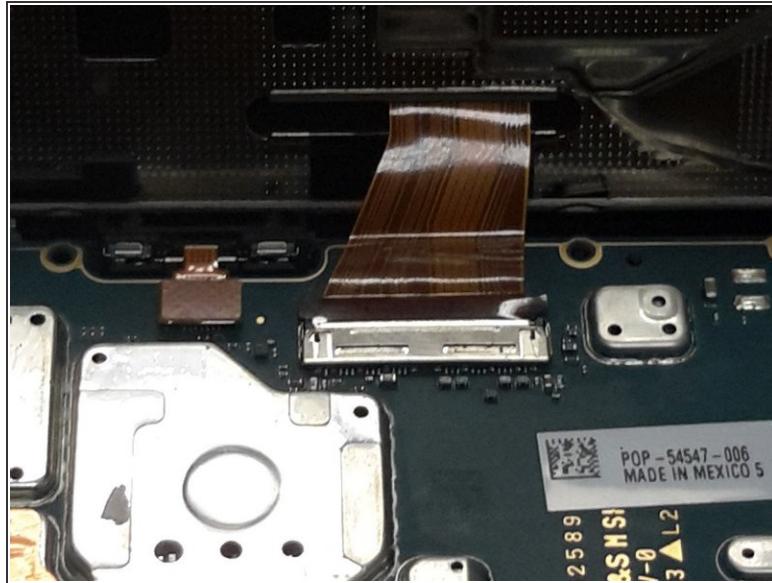

- Use a plastic tool to carefully switch up the LCD ribbon holder
- Detach the LCD from the main board

*(i)* When installing the new LCD, make sure the ribbon is inserted to the white line.

## Step 6 — LCD Panel removal



- You can now detach the LCD Panel from the main frame.

To reassemble your device, follow these instructions in reverse order.