




Blackberry Bold 9000 LCD Screen Replacement

Follow these steps to fix that unsightly or unresponsive screen.

Written By: Kelly

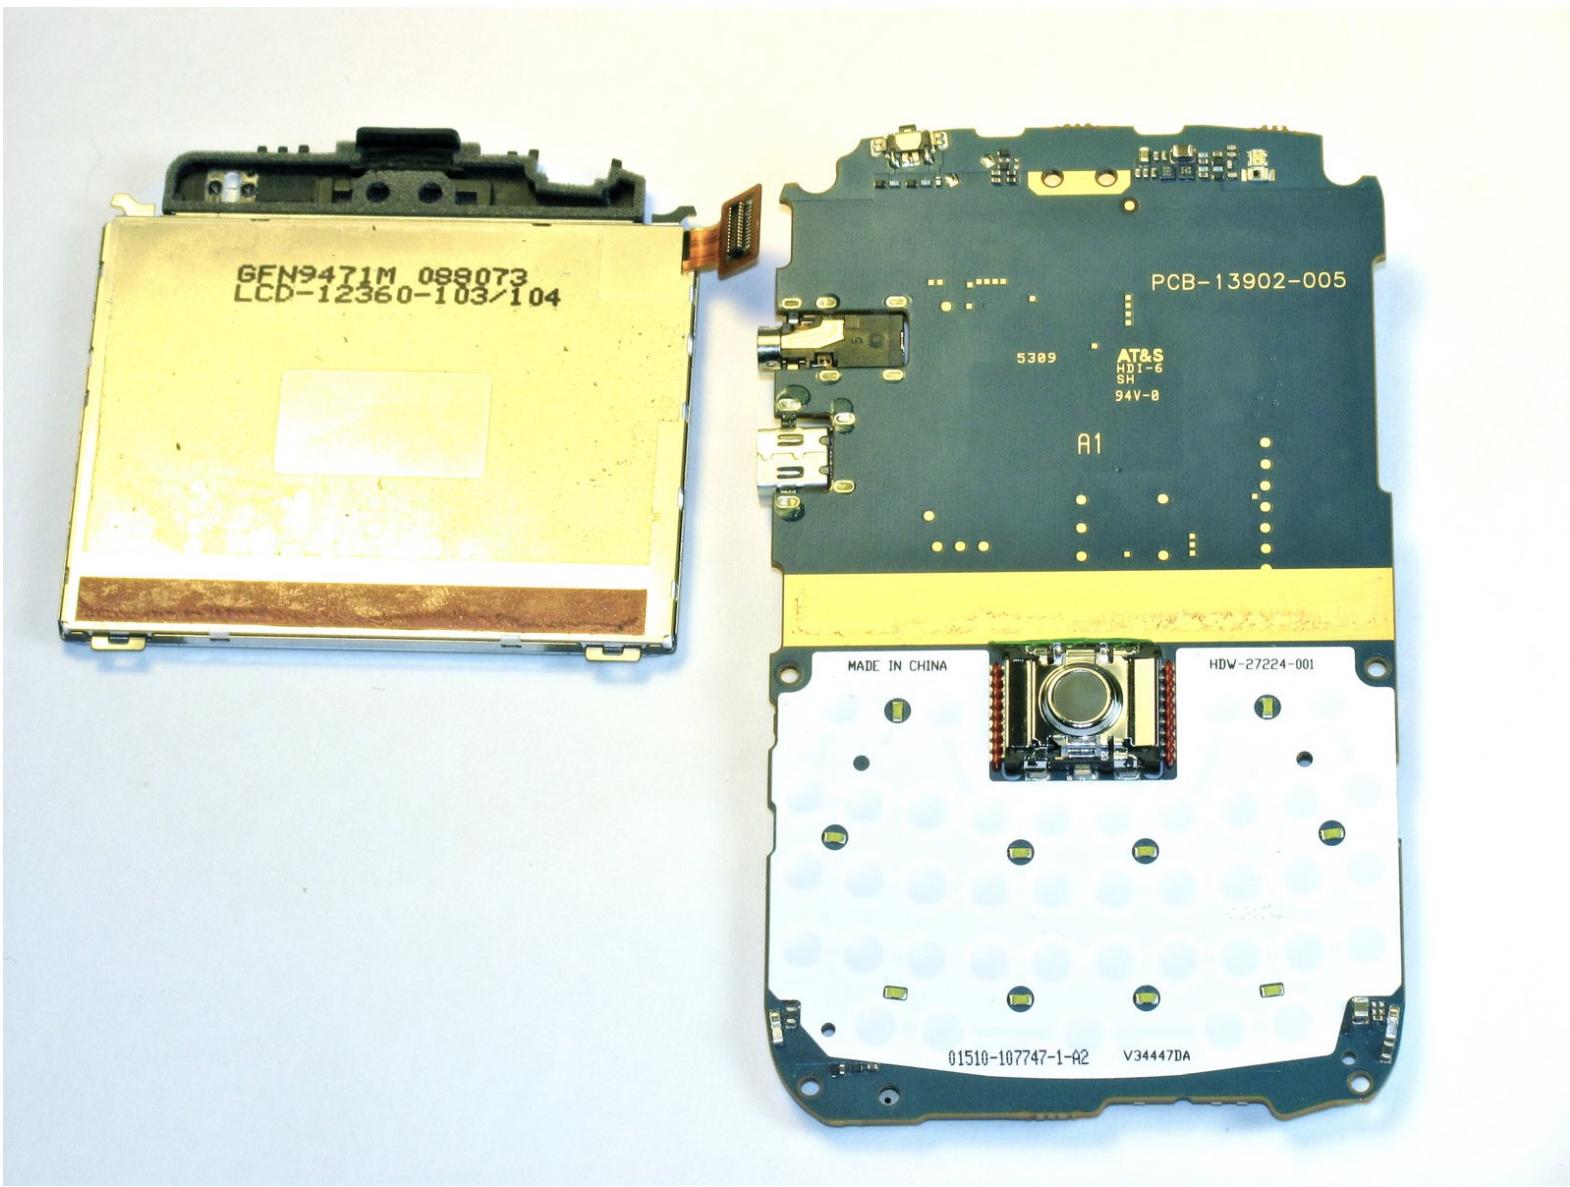

 **TOOLS:**

- [Spudger \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery



- Place your Blackberry facedown in front of you.

Step 2



- Press the cover release button on the bottom of your device. Lift and remove the back cover.

Step 3



- From the top, use your fingernail to lift the battery out.

Step 4 — Rear Case



- Remove the SIM card.

Step 5



- Remove the six 7.0mm Torx screws securing the rear case to the rest of the phone.

Step 6



- Use the plastic opening tool to remove the rear case.

Step 7 — LCD Screen




- With the same plastic opening tool, lift the motherboard up and out.
- Remove the motherboard assembly from left to right, using caution near the audio jack on the right side of the device.

Step 8



- Using a spudger, lift the ribbon band in the upper right-hand corner up and away from the motherboard assembly until it disconnects.

Step 9

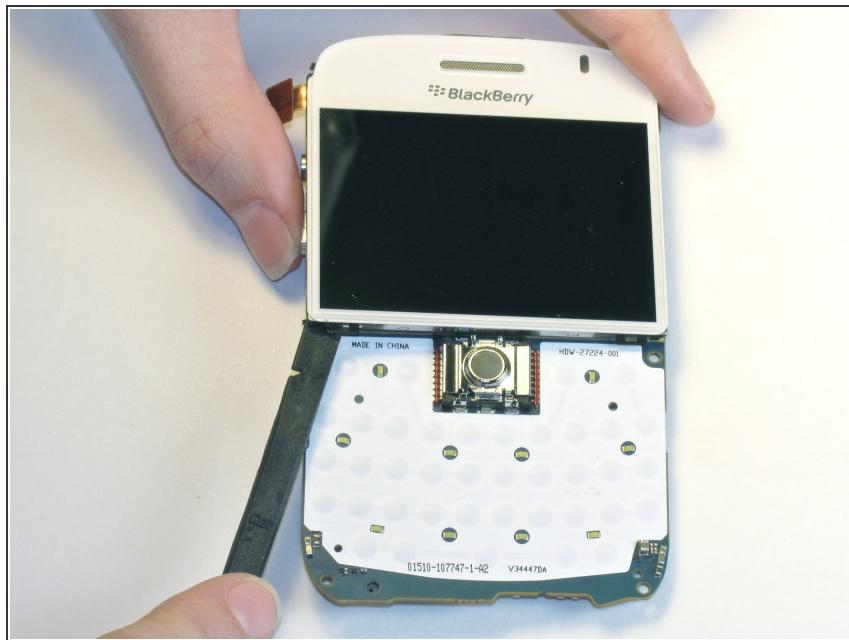

- Turn the motherboard assembly over.
- Starting at the lower corners of the screen, begin to lift the screen away from the motherboard using the spudger.

⚠ Do this step very slowly to avoid breaking the screen or the motherboard. The backing will eventually separate.

- Remove the plastic bit that hides the speaker grill - it is stuck with double-sided tape.
- With a thin blade/pin, ease the speaker grill and the metal plate away from the old lcd screen.

To reassemble your device, follow these instructions in reverse order.