




# Blackberry Bold 9000 Volume Toggle Replacement

This guide will show you how to replace your volume toggle so you never miss important calls again.

Written By: Kelly

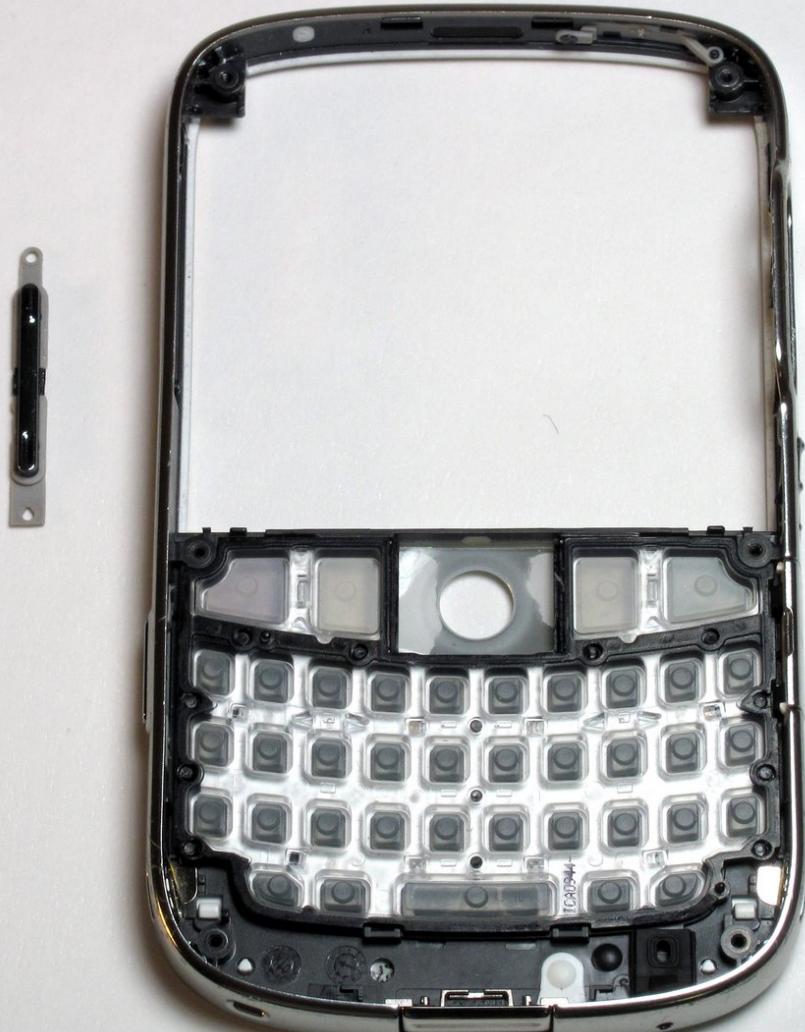

 **TOOLS:**

- [Spudger \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

## Step 1 — Battery



- Place your Blackberry facedown in front of you.

## Step 2



- Press the cover release button on the bottom of your device. Lift and remove the back cover.

## Step 3



- From the top, use your fingernail to lift the battery out.

## Step 4 — Rear Case



- Remove the SIM card.

## Step 5



- Remove the six 7.0mm Torx screws securing the rear case to the rest of the phone.

## Step 6




- Use the plastic opening tool to remove the rear case.

## Step 7 — Volume Toggle




- Lift out the motherboard assembly using the plastic opening tool, prying at all four sides of the device.
- Try to remove from left to right, using caution with the audio jack on the right side of the device.

## Step 8

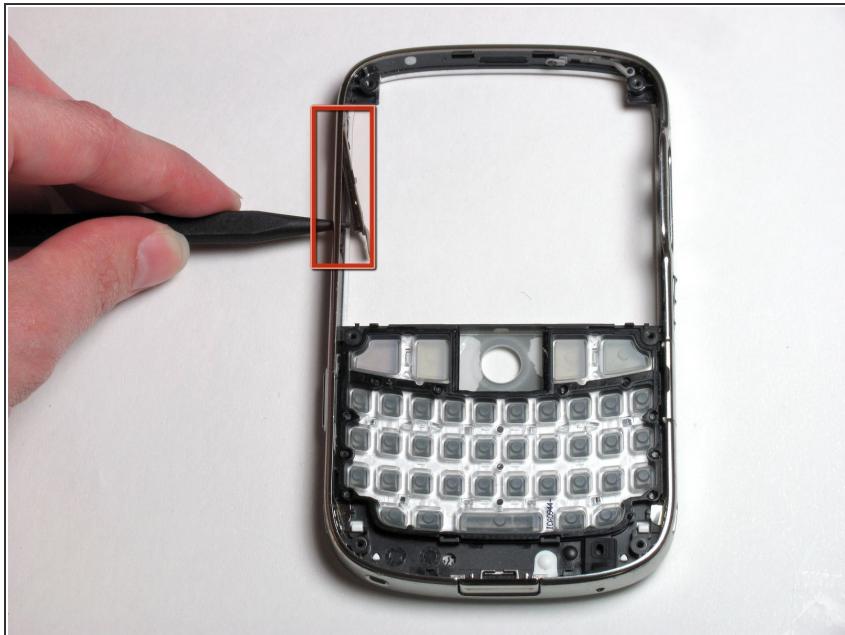

- Locate the volume toggle on the main frame of the phone.
- Using the spudger, push the toggle in from the outside and remove.

## Step 9

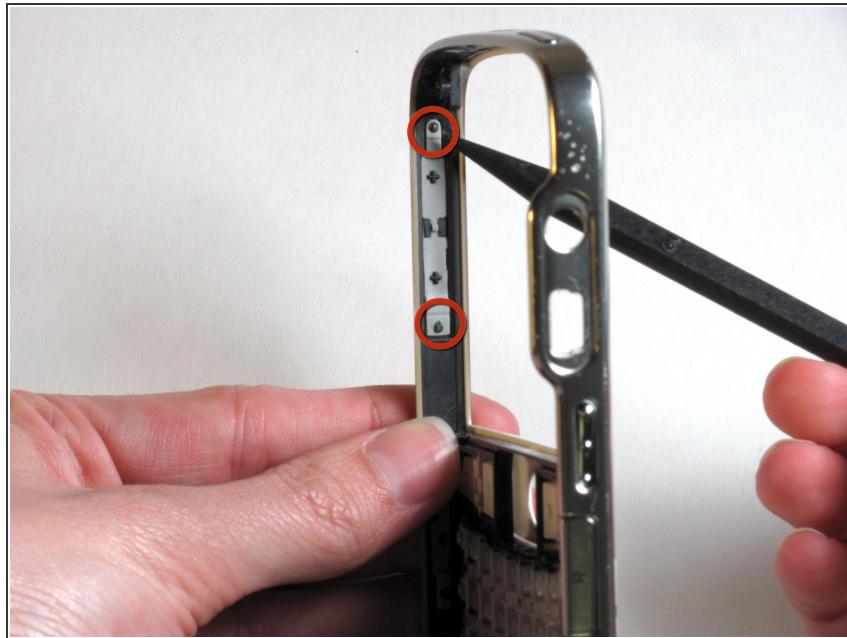

- Place the new toggle in, using the pointed end of the spudger to attach the toggle to the upper and lower pins.
- i* Make sure the toggle is completely in place by pressing it outward into the frame.

To reassemble your device, follow these instructions in reverse order.