




Blackberry Bold 9900 Back Case Replacement

This guide will show you how to replace your Blackberry Bold 9900 back case.

Written By: Sowmika

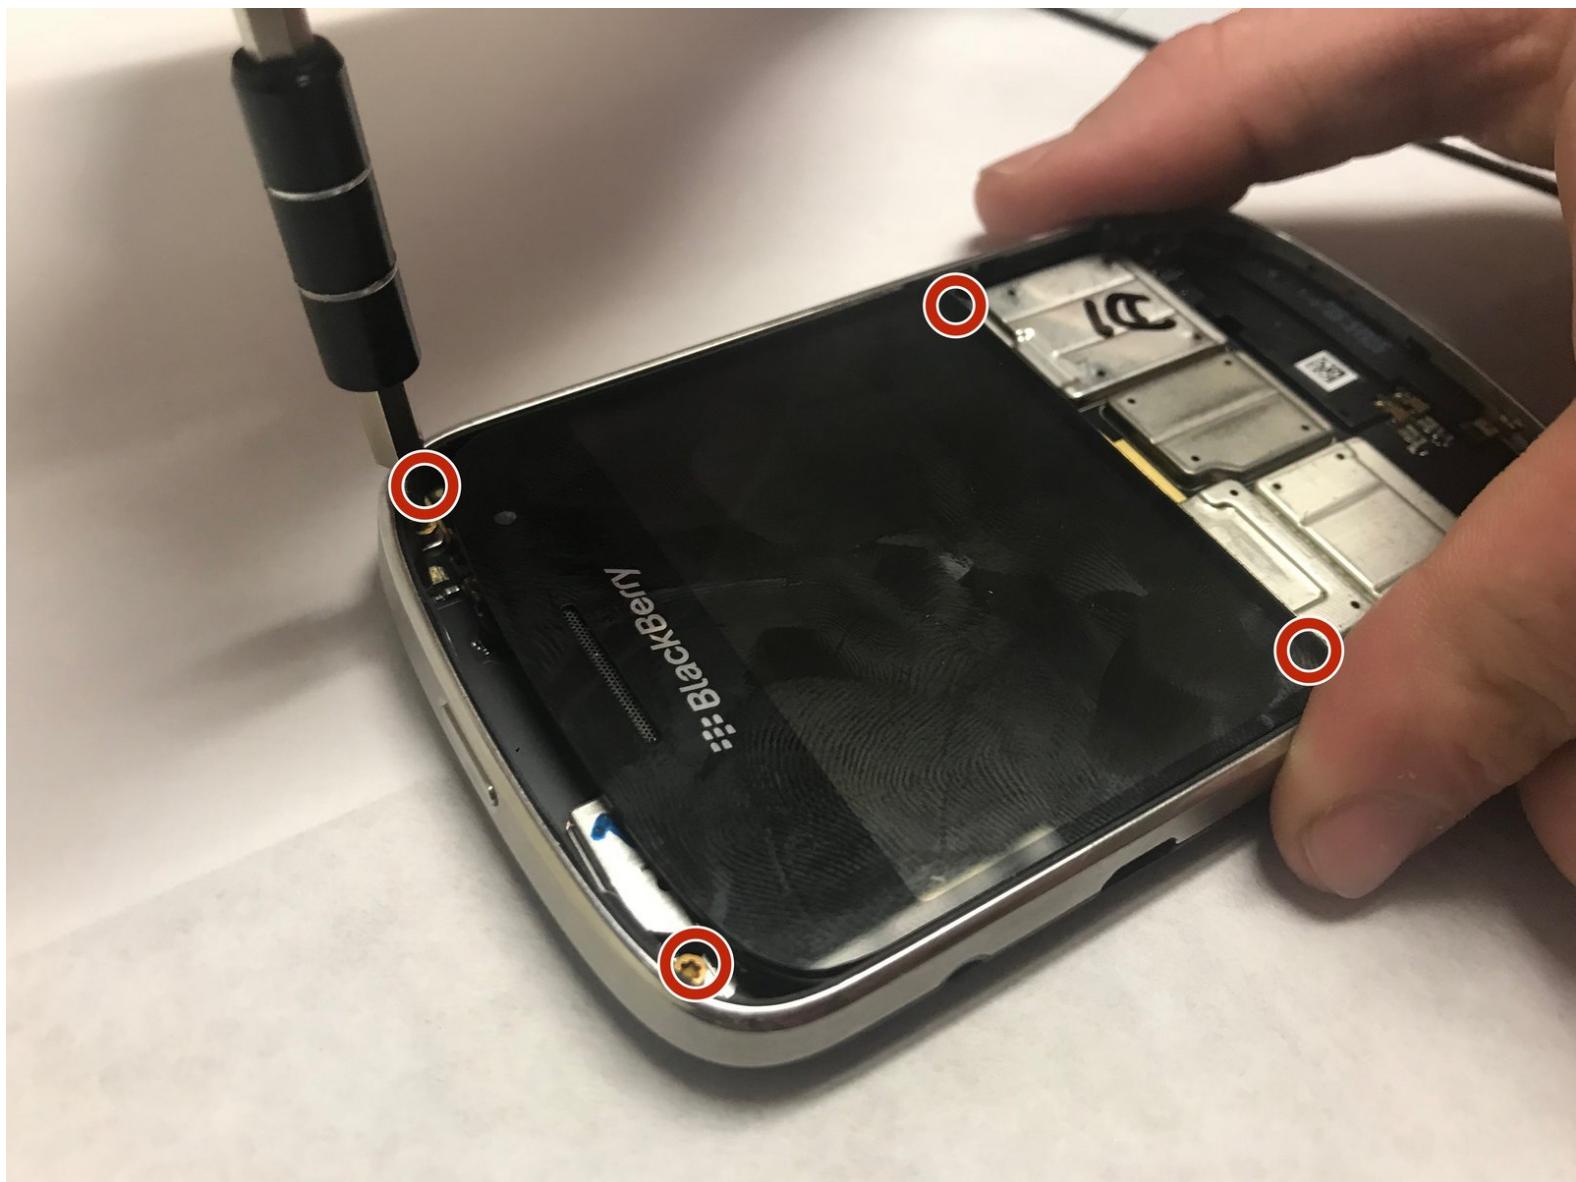

INTRODUCTION

Replacing the back case of the BlackBerry Bold 9900 is a tedious task, but it will allow you to become more familiar with your device, increase the lifespan of the device, and reduce e-waste.

TOOLS:

- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Battery



- Place phone screen down.
- Use your finger to lift upward on the battery case.
- Pull the cover away from the battery.

Step 2




- Lift the edge of battery with the green stripe upward to remove battery.

Step 3 — Memory Card




- The Memory Card is located inside the red rectangle.
- To remove the Memory Card, push and slide the card inward towards the top of the phone. It will be ejected.

Step 4 — SIM Card

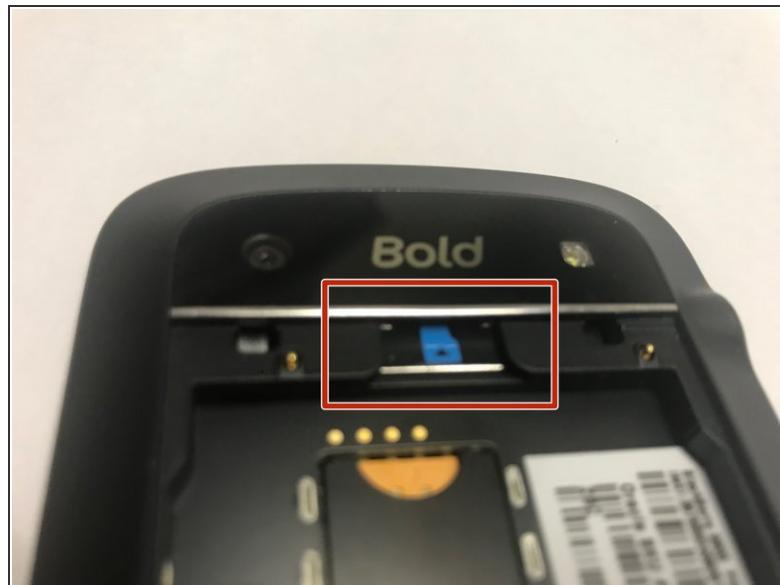


- The SIM Card is located where the red rectangle is shown.
- To remove SIM Card, push the card inward towards the top of the phone then release. The SIM card will be ejected.

Step 5 — Keyboard

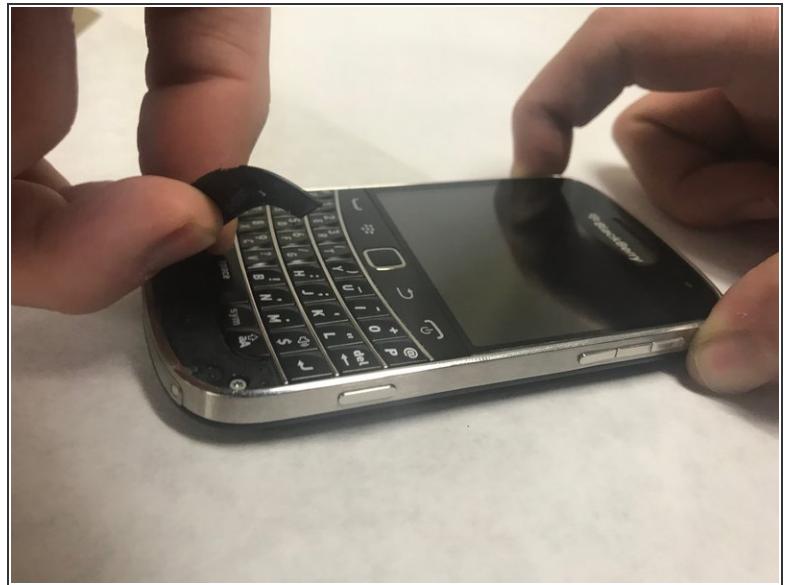

- Lift the bezel at the bottom of the phone up and peel it away from the phone.

Step 6

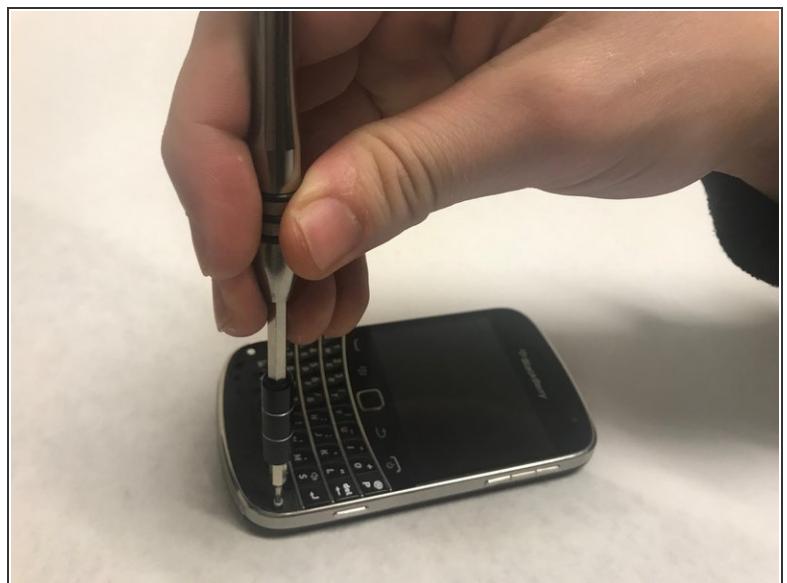


- Remove the two exposed screws using the T5 Torx screwdriver.

Step 7




- Now lever the keyboard up using the screwdriver in the indicated hole.

Step 8

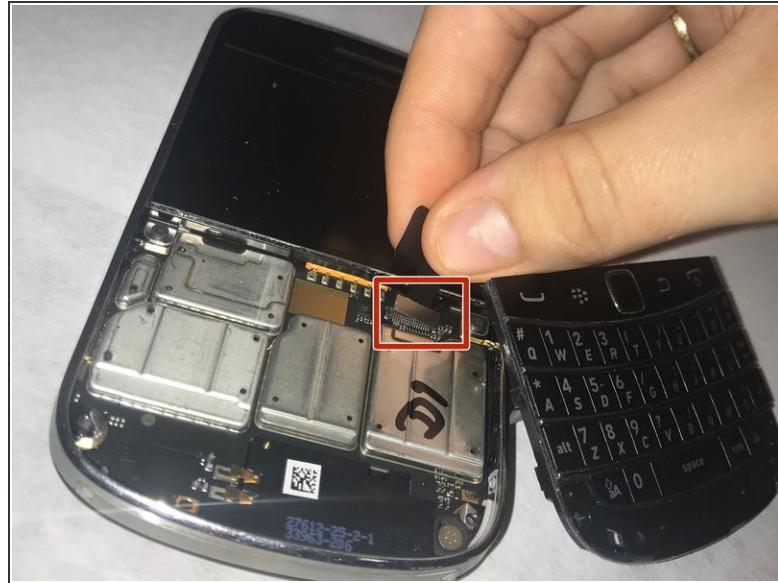

- The keyboard is attached via a ribbon cable. Pull the cable up to remove the keyboard.

Step 9 — Back Case

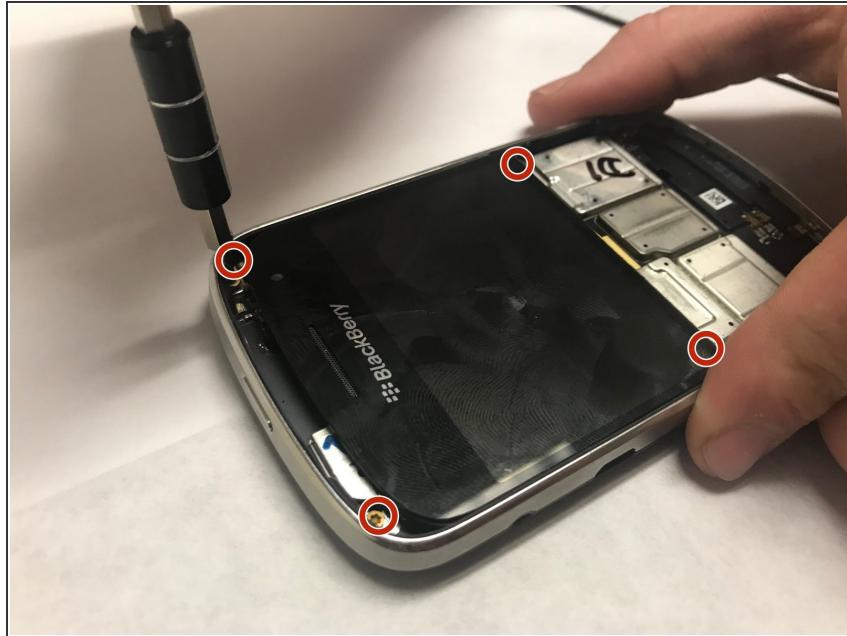

- Using the T5 Torx Screwdriver, remove the four torx screws that are located on the bottom half of the device

Step 10



- Now, carefully and gently using your fingers, lift and remove the assembly from the back case.

To reassemble your device, follow these instructions in reverse order.