



Blackberry Bold 9900 Trackpad Replacement

Use this guide to replace the trackpad in your BlackBerry Bold 9900.

Written By: Chris Velasquez



INTRODUCTION

The process of replacing the trackpad of your BlackBerry Bold 9900 will allow you to become familiar with your device and restore full functionality of the trackpad.

TOOLS:

- Spudger (1)
- T5 Torx Screwdriver (1)

PARTS:

- Blackberry Bold 9900 9930 Keypad Keyboard Trackpad Flex Membrane (1)

Step 1 — Battery



- Place phone screen down.
- Use your finger to lift upward on the battery case.
- Pull the cover away from the battery.

Step 2




- Lift the edge of battery with the green stripe upward to remove battery.

Step 3 — SIM Card




- The SIM Card is located where the red rectangle is shown.
- To remove SIM Card, push the card inward towards the top of the phone then release. The SIM card will be ejected.

Step 4 — Keyboard

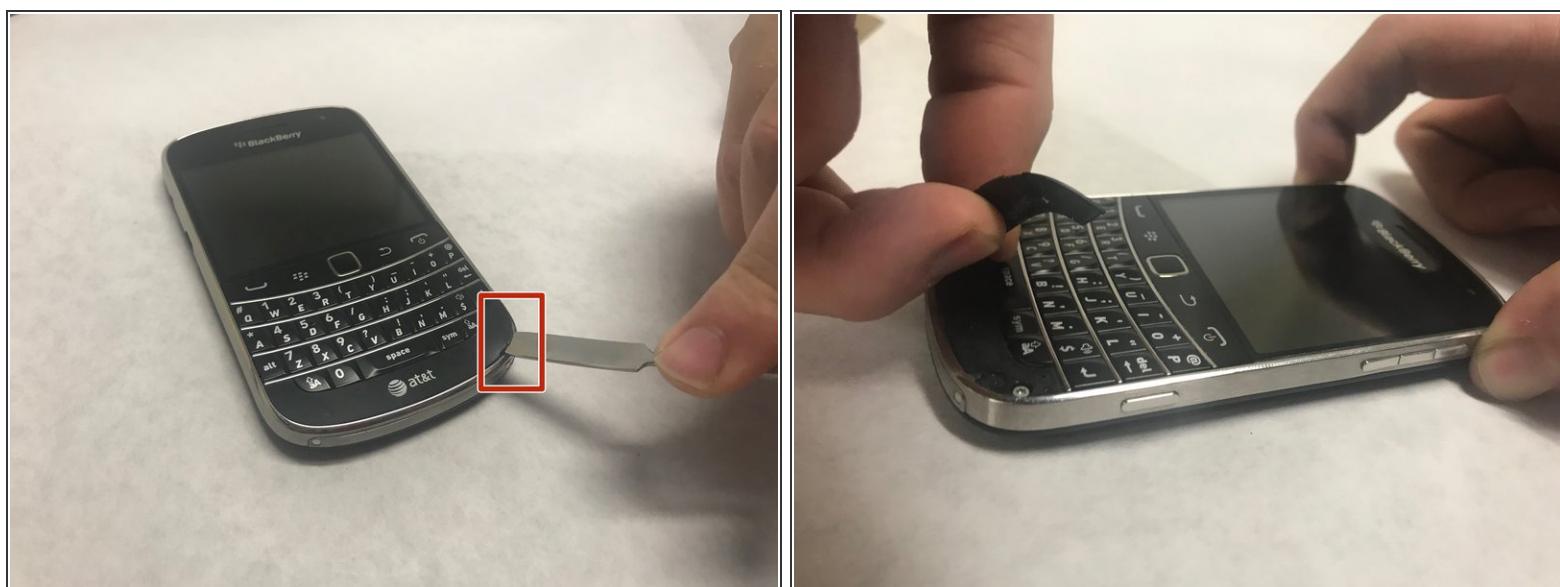

- Lift the bezel at the bottom of the phone up and peel it away from the phone.

Step 5

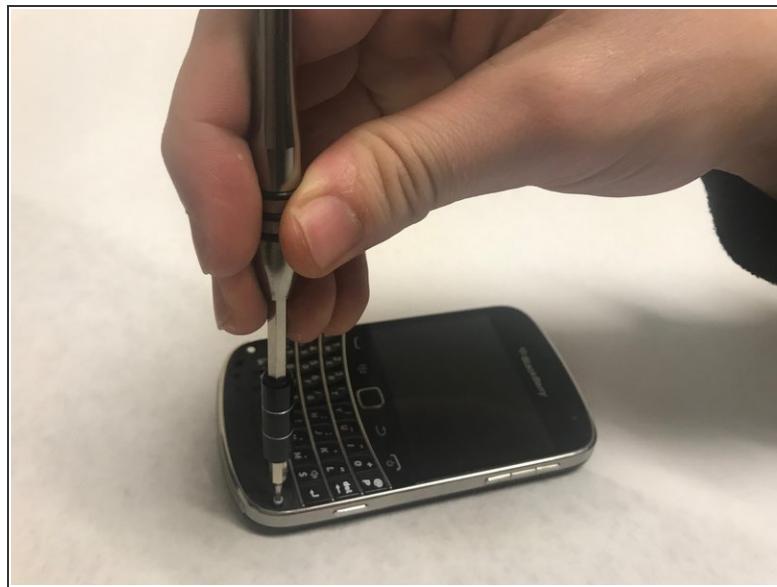


- Remove the two exposed screws using the T5 Torx screwdriver.

Step 6





- Now lever the keyboard up using the screwdriver in the indicated hole.

Step 7

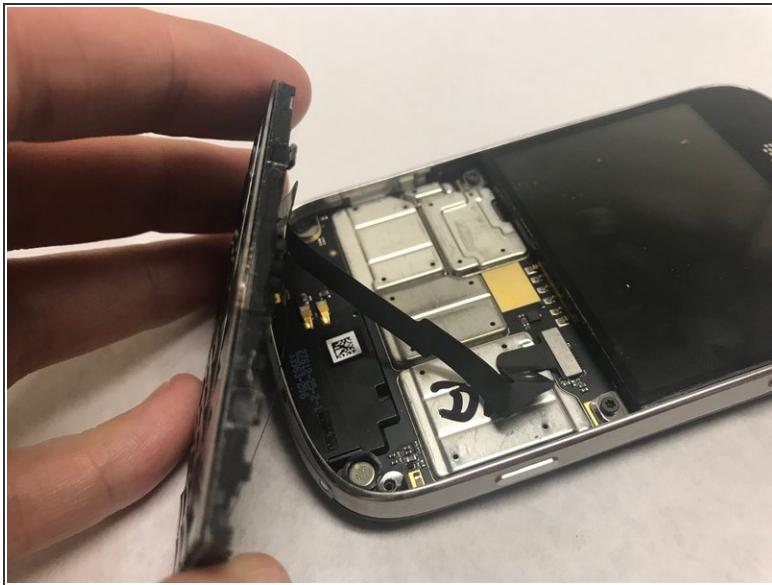



- The keyboard is attached via a ribbon cable. Pull the cable up to remove the keyboard.

Step 8 — Trackpad

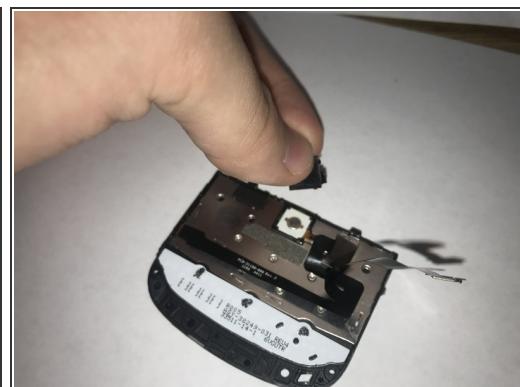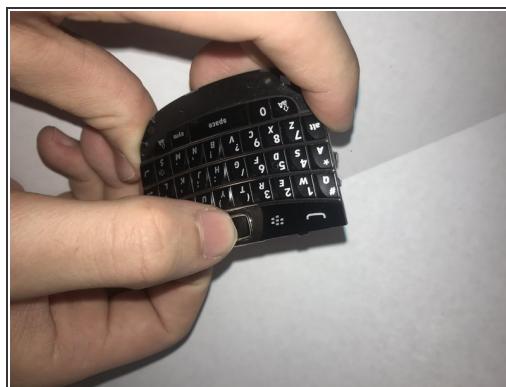

- Push into the trackpad. This will release the trackpad supporting piece.

Step 9

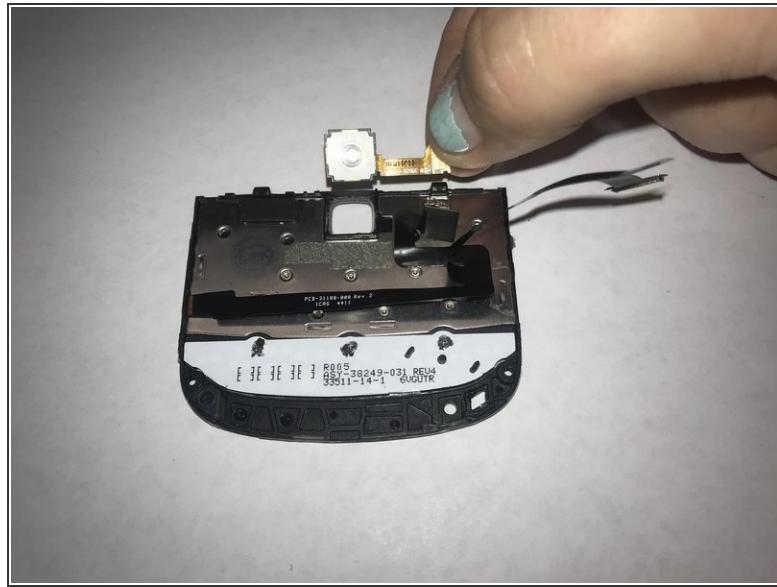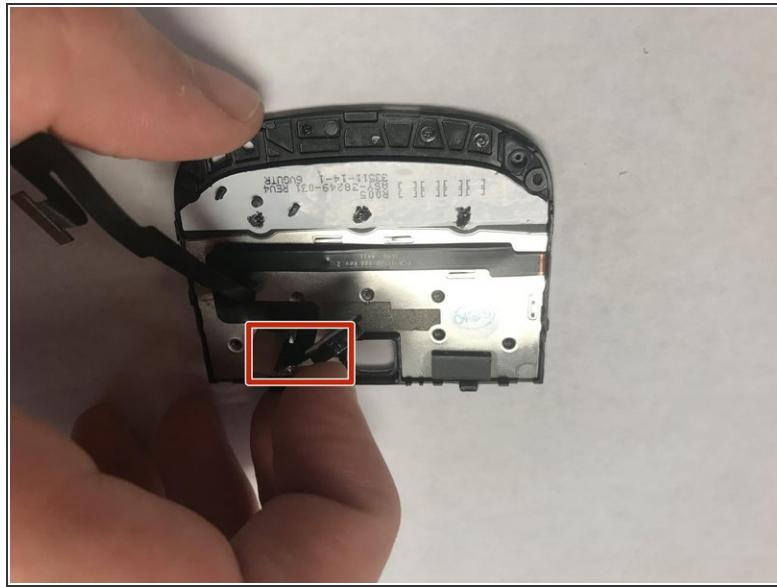

- The trackpad is attached via ribbon cable. Pull this cable up in order to release the trackpad.

To reassemble your device, follow these instructions in reverse order.