



# Blackberry Curve 8320 Keyboard Replacement

This guide explains the disassembly of the Blackberry Curve 8320 to replace the keyboard.

Written By: Yegor Pomortsev



## INTRODUCTION

This guide will show you how to:

- Remove the battery
- Remove the front panel
- Replace the keyboard

---

## TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

---

## Step 1 — Front Panel




- Use a plastic opening tool to gently pry the bottom cover loose.

 Do not use excessive force at risk of damaging the antenna, which is under this casing.

- Pull the cover from the front of the phone after the back is loose.

## Step 2

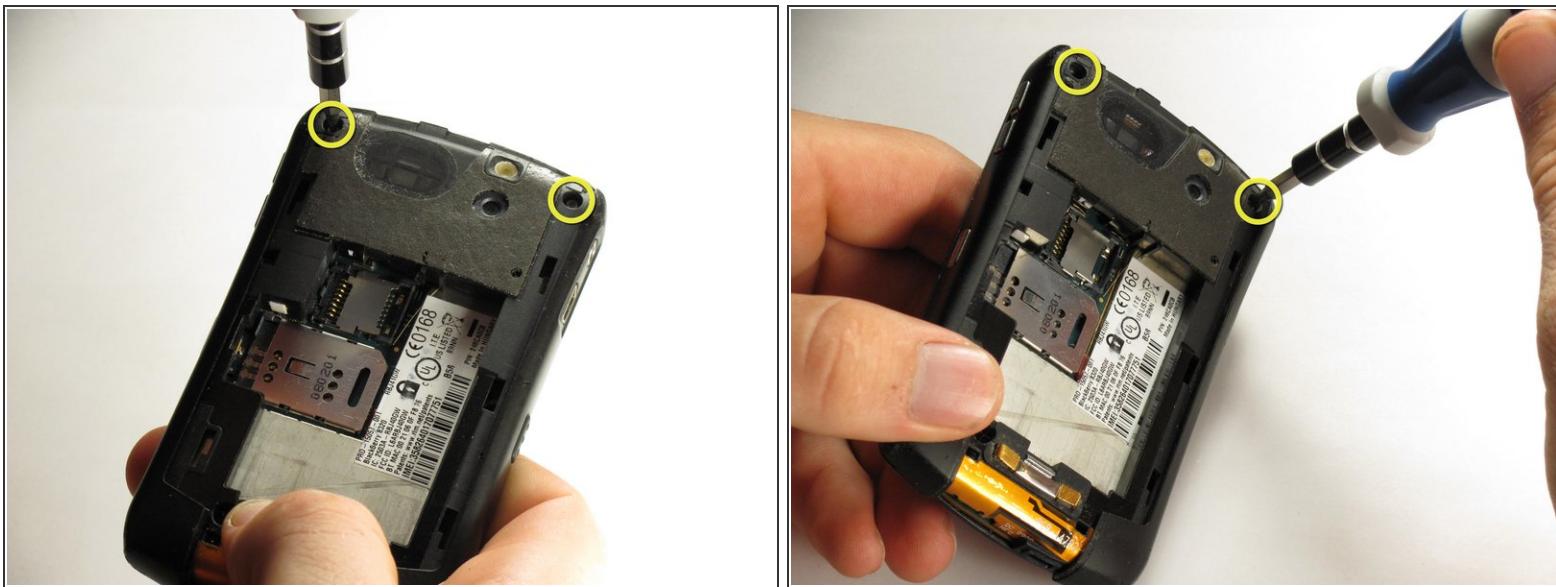

- Remove the two top screws with a T5 Torx screwdriver.

 The screws are 8mm long.


## Step 3



- Gently pry off the top of the side casings.

**⚠** The side casings cannot be fully removed yet because they are screwed on at the bottom.

## Step 4

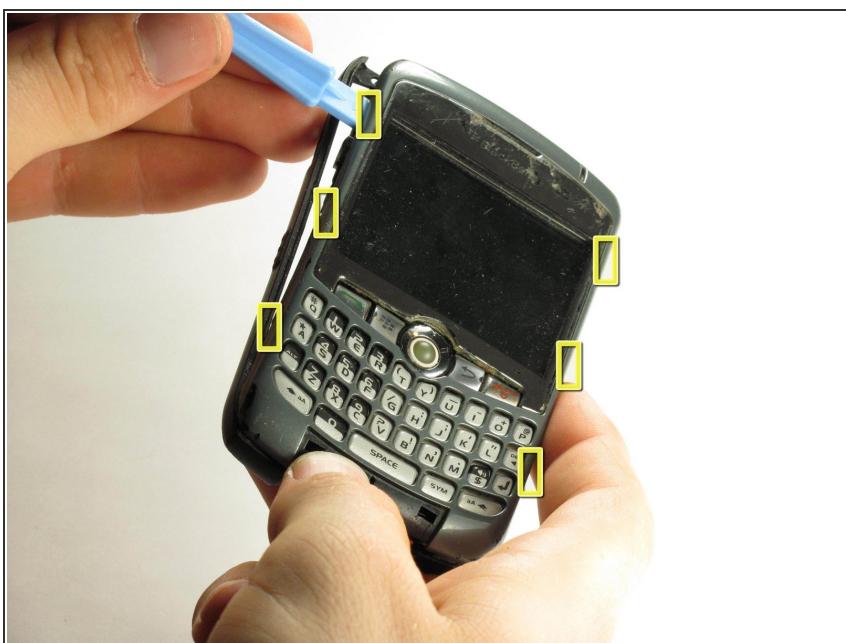

- Use a plastic opening tool to detach the securing clips holding the the front panel in place.

**i** There are six securing clips total.

## Step 5



- Remove the front panel.

*(i)* You may need to apply some force because the front panel is attached to the rest of the device with adhesive.

## Step 6 — Keyboard



- Remove the keyboard.

**⚠** Be careful not to bend or fold the keyboard, as it can break easily.

To reassemble your device, follow these instructions in reverse order.