



Boosted Board 1st Generation Rear Wheels Replacement

How to take off and replace the rear wheels on your Boosted Board 1st Generation.

Written By: Emily Imfeld




INTRODUCTION

This guide will help teach you how to take off the rear wheels of your Boosted Board.

TOOLS:

- 1/2" Socket Wrench (1)
- 9/64" Allen Wrench (1)

Step 1 — Rear Wheels

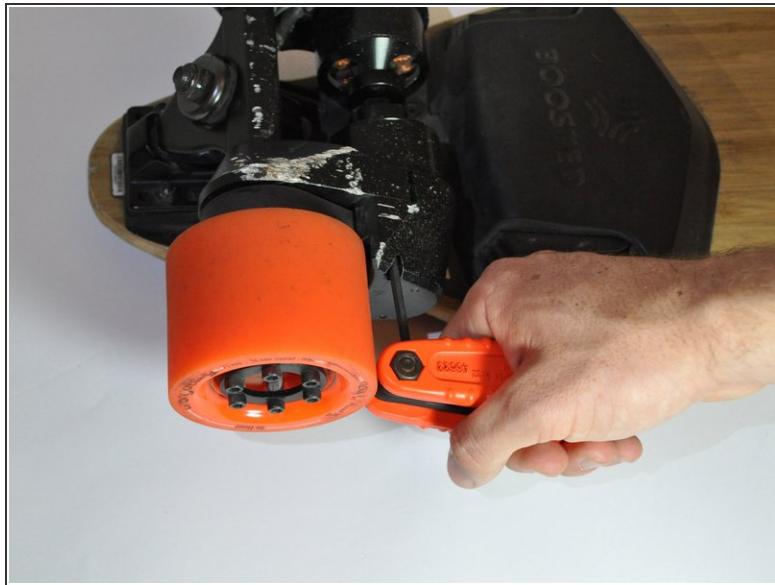

- Loosen the two 16.74 mm motor mount hex nut screws with a 9/64" Allen wrench.

(i) Do Not Remove the Screws.

Step 2



- Compress the motor mount back towards the wheel.
- While keeping the motor mount compressed, tighten one of the hex nuts that you loosened in the previous step.

(i) The motor mounts are spring tensioned so it is necessary compress them to loosen the belts.

Step 3



- Remove the axle nut with a 1/2" socket wrench

Step 4



- Rotate and pull counterclockwise until the wheel comes off the axle completely.

(i) The **front** washer will come off with the wheel.

- Remove the **back** washer from the axle.

(i) Replacing the wheel requires the bearings to be switched into the new wheel.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-22 06:55:21 PM (MST).

