



# Bose Soundlink Revolve AUX/USB Port Replacement

Replace your damaged AUX/USB port to allow your Soundlink Revolve to charge and directly connect to an audio device again.

Written By: Brian Butner




## INTRODUCTION

Use this guide to replace the AUX/USB port in your device.

### TOOLS:

- [Spudger \(1\)](#)
- [TR9 Torx Security Screwdriver \(1\)](#)

## Step 1 — Bottom Circuit Board Access

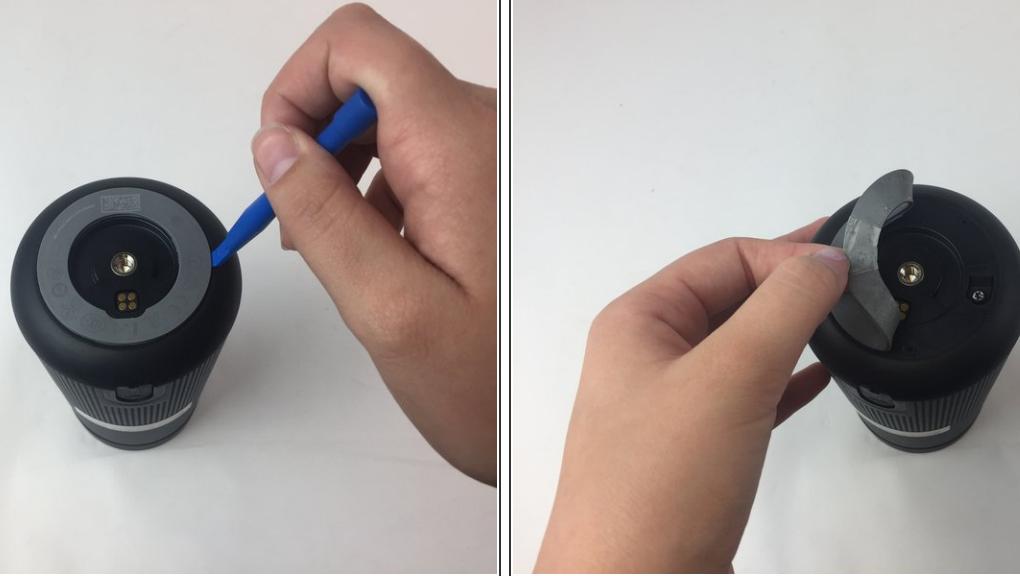

- Flip speaker over so that the bottom is facing up.
- Using the blue spudger, lift the gray foam up and slowly peel it off with your hand.

## Step 2




- Using the screwdriver, unscrew three screws.
- Detach the bottom cover from the rest of the speaker by pulling the two in opposite directions.

## Step 3




- Remove the screw that is above the charging port.

## Step 4

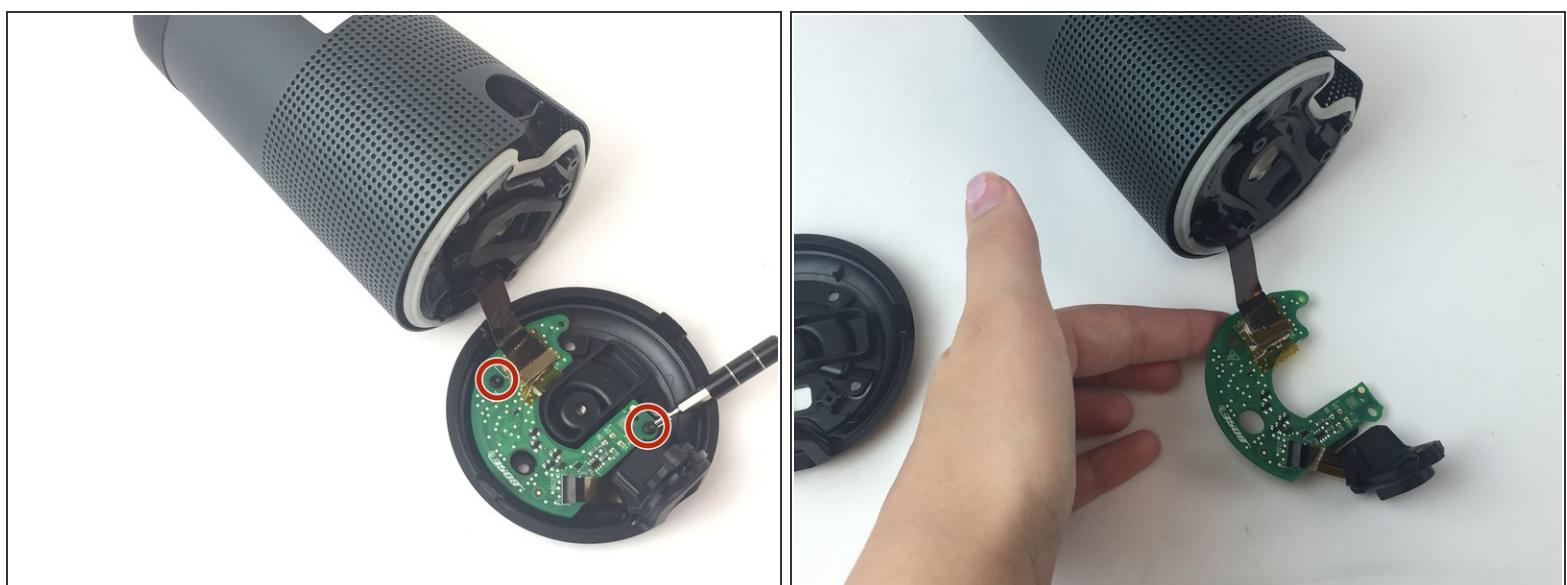

- Remove the two screws connecting the motherboard to the bottom cover of the speaker.
- Remove the bottom cover.

## Step 5 — AUX/USB Port

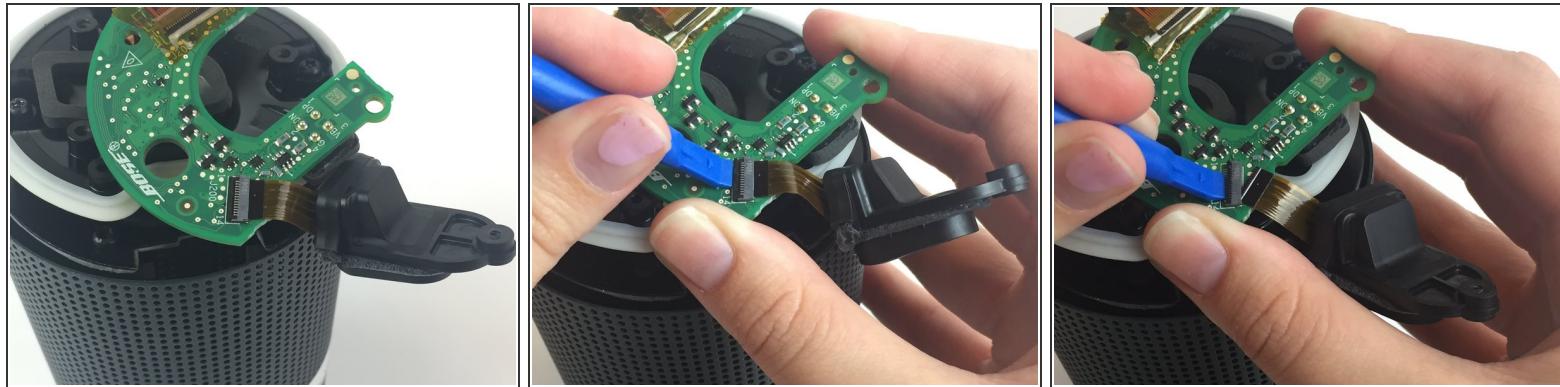

- Using the blue plastic opening tool, pry up the small black clamp connecting the AUX/USB port to the lower circuit board.
- Remove the AUX/USB port from the device.

To reassemble your device, follow these instructions in reverse order.