



Braven BRV-1s Front Speaker Screen Replacement

This guide will help you with replacing the front facing screen that protects the speakers in case it is broken, dented, or damaged.

Written By: Carmelo DeLeon



This document was generated on 2019-09-29 11:08:51 AM (MST).


INTRODUCTION

Learn how to properly remove a damaged speaker screen in order to replace it.

TOOLS:

- [1.5mm Hex Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Front Speaker Screen

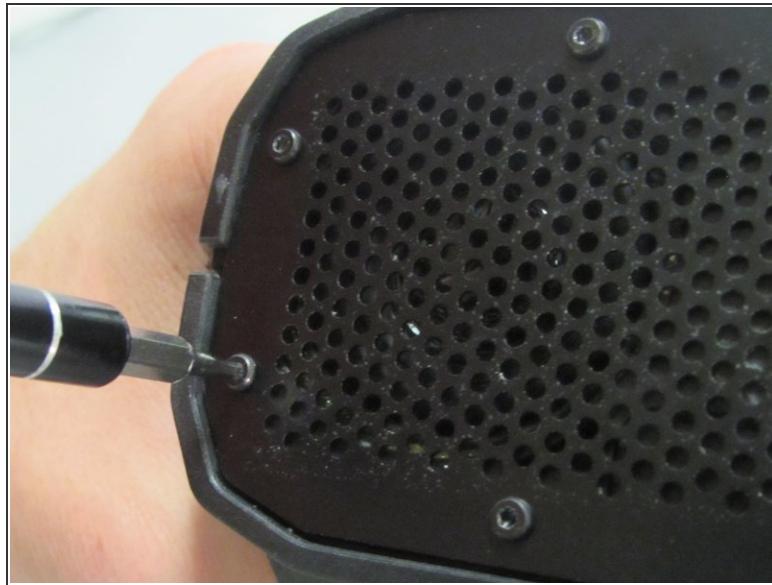

- Using a 1.5mm hex screwdriver start unscrewing the 0.6mm screws holding down the front replacement screen
- Repeat the unscrewing process for the other 7 screws

Step 2



- Use a plastic spudger to pry off the front speaker screen

Step 3



- Peel off the front screen using your fingers after using the plastic prying tool/spudger
- *i* Be careful not to damage the glue underneath the front speaker screen, damaging the glue may cause the device to no longer be waterproof.

To reassemble your device, follow these instructions in reverse order.