




# Cambridge SoundWorks OontZ Angle Plus Speakers Replacement

This guide is here to help with removing and replacing the speakers in a Cambridge SoundWorks OontZ Angle Plus.

Written By: David Rice

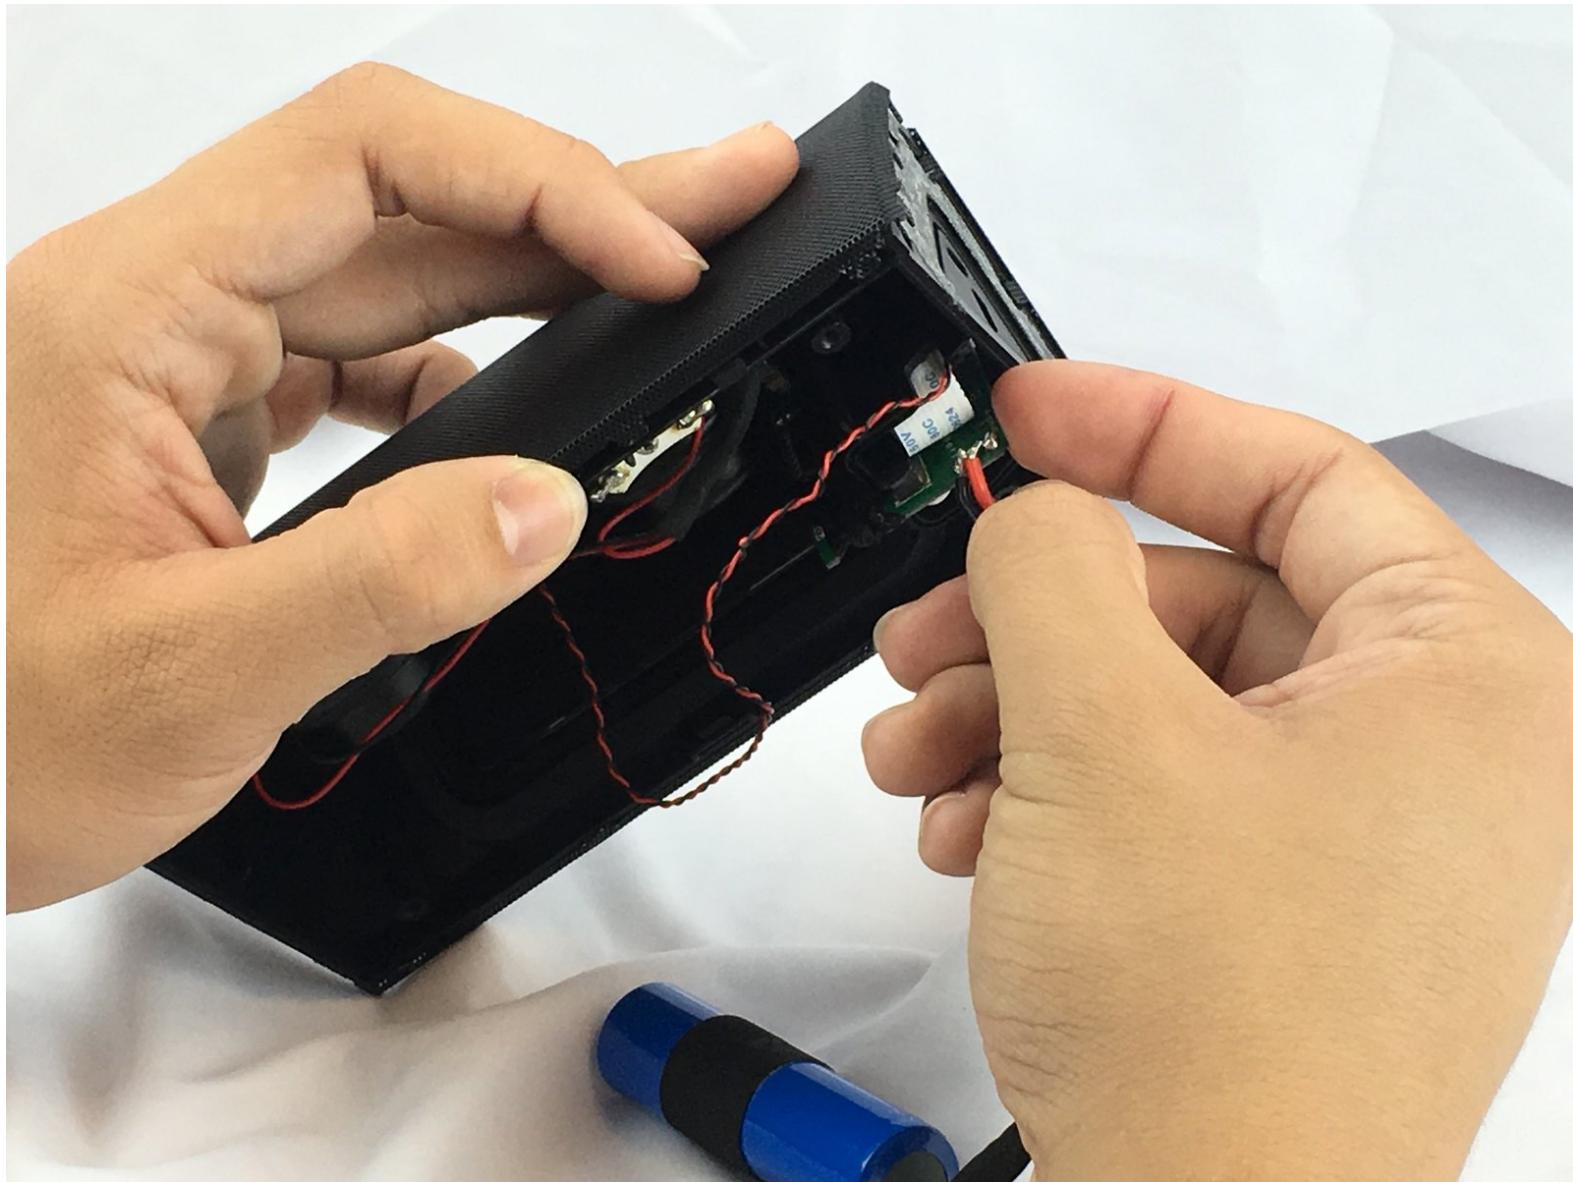

This document was generated on 2019-09-24 10:14:22 AM (MST).

 **TOOLS:**

- [Phillips #1 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Metal Spudger \(1\)](#)
- [Soldering Iron \(1\)](#)

## Step 1 — Rubber Casing



- Remove the six screw covers from the bottom of the device.

## Step 2



- Starting from the screw covers, remove the front and back casing of the device.

## Step 3



- Carefully pull off the casing covering the ends.

## Step 4



- Slowly remove the casing from the top of the device.

## Step 5 — Speaker Grill



- Unscrew the five 11.5mm Phillips screws from the bottom plate.

## Step 6



- Carefully pull apart the bottom and top plates, using the blue plastic opening tool.

## Step 7



- Once the plates are separated, slowly pull the bottom plate away from the top plate.

**i** There are wires connected to both plates, so be cautious while doing this step.


## Step 8



- Use the metal spudger to bend the three bendable clamps on the ends of the speaker cover.

**i** Beware, the bending process requires patience and extra time.


## Step 9

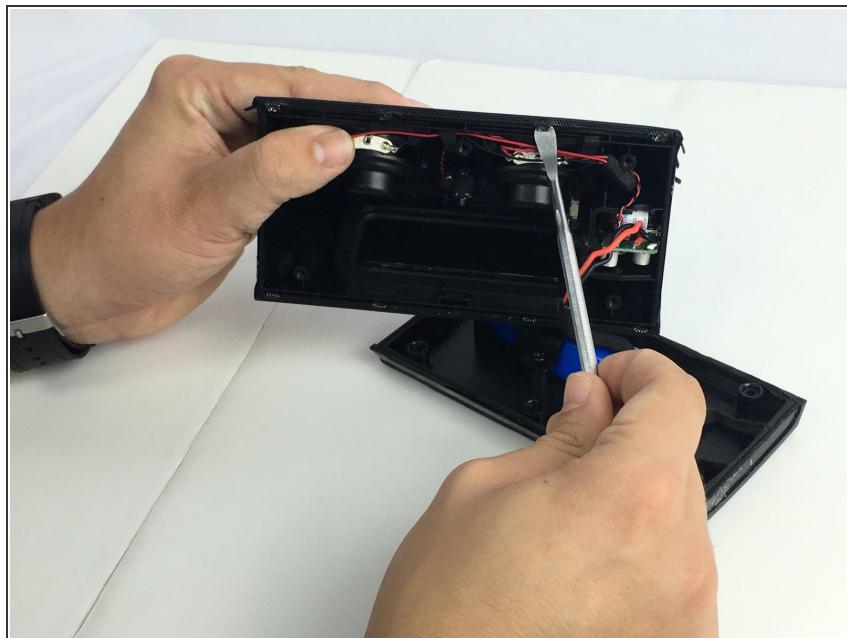

- Next, use the metal spudger to bend the four bendable clamps on the bottom of the speaker cover.


**i** This step also requires some time and patience.

## Step 10

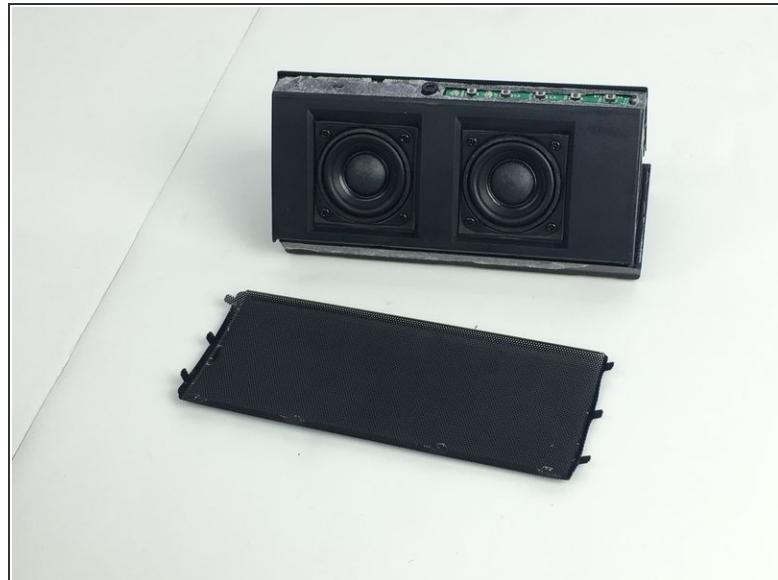


- Finally, bend the speaker cover upward and it will slide out.

## Step 11 — Speakers

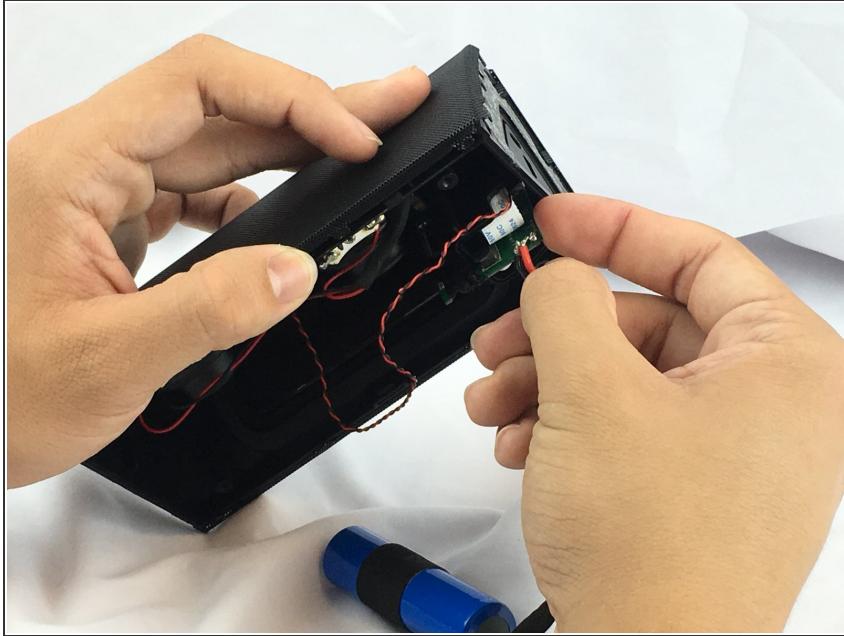

- With some force, push the motherboard straight in toward the center of the device.


## Step 12

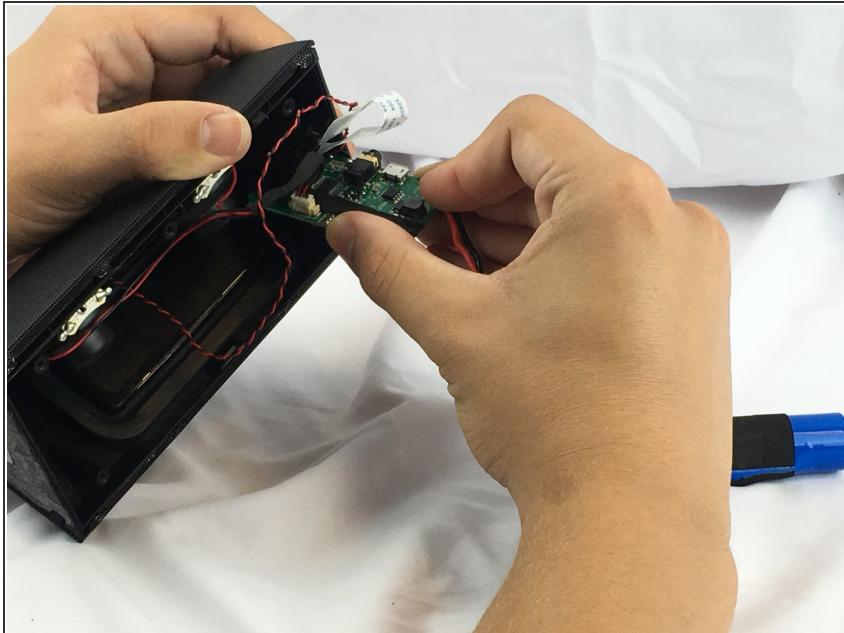

- Pull the motherboard straight out of the device.


*There is some adhesive on the motherboard that holds it in place. This makes the motherboard fit in the groove rather tight.*

## Step 13

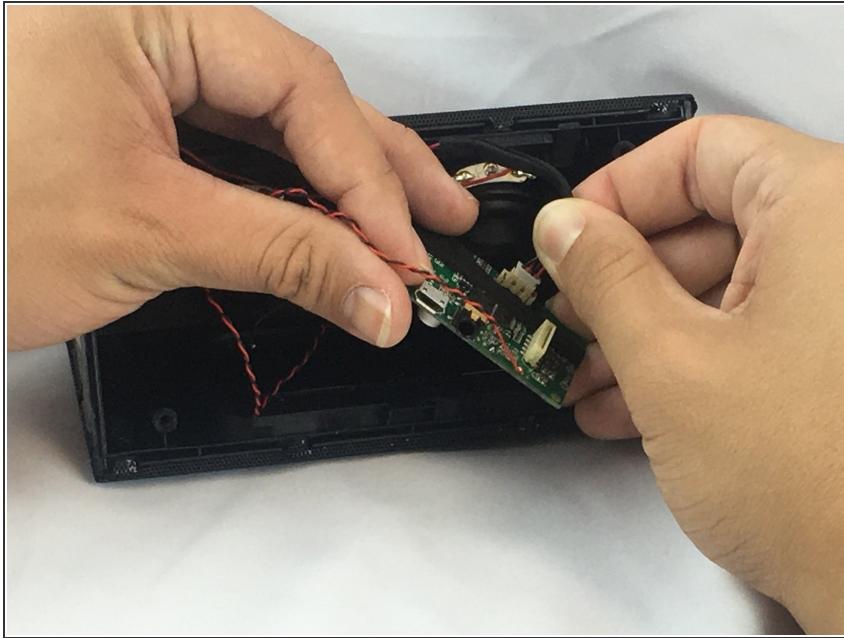


- Unplug the speaker's connector from the motherboard.

## Step 14

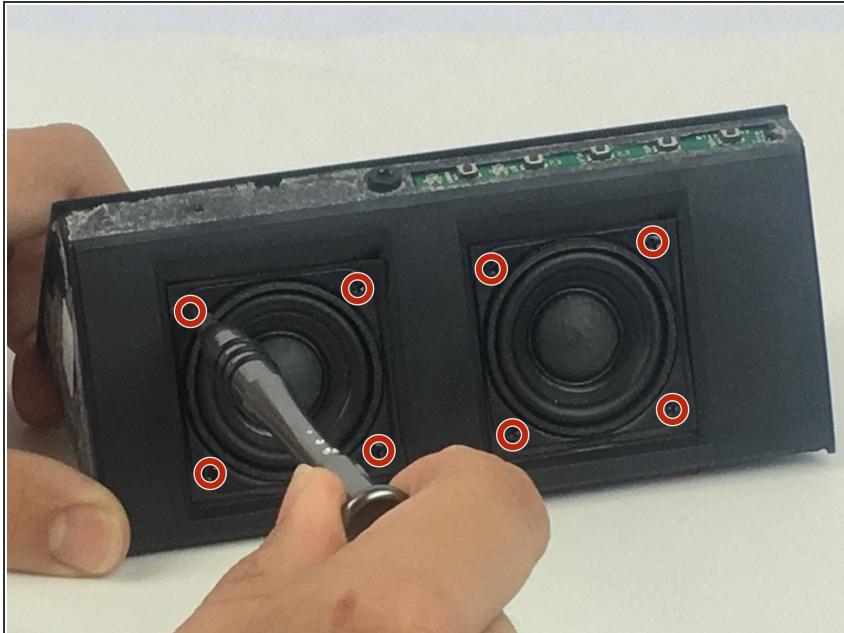


- Unscrew the eight screws holding the speakers in place.

## Step 15

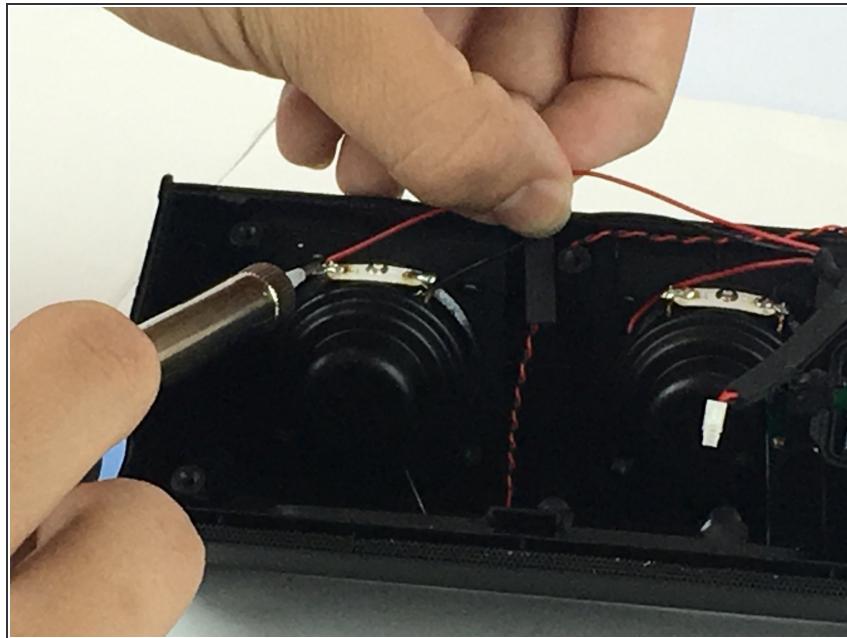

- Desolder the the wires connected to the back side of both speakers.

## Step 16

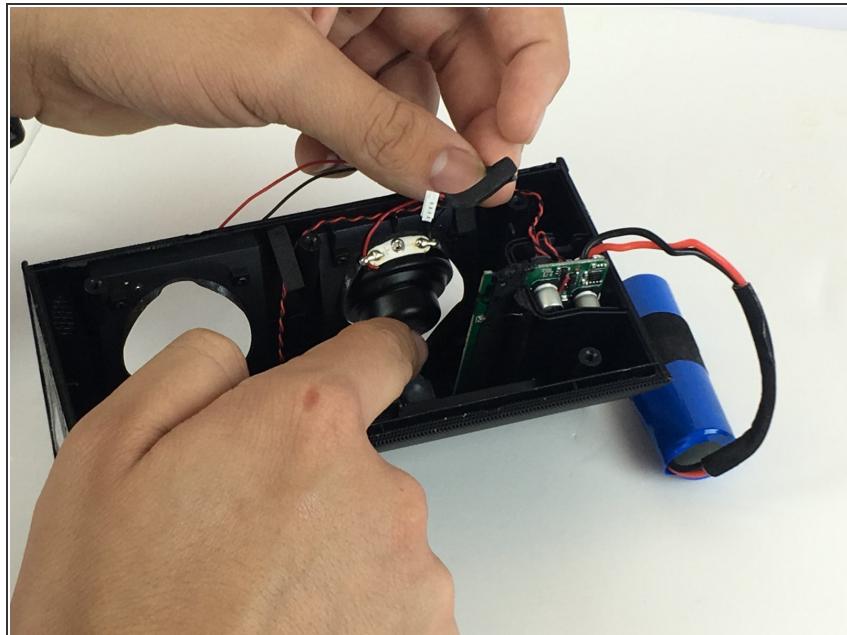

- Carefully push the speakers out one at a time.

To reassemble your device, follow these instructions in reverse order.