




Canon PowerShot A620 Shutter Button Replacement

Removal of shutter button.


Written By: Jaime Abraham

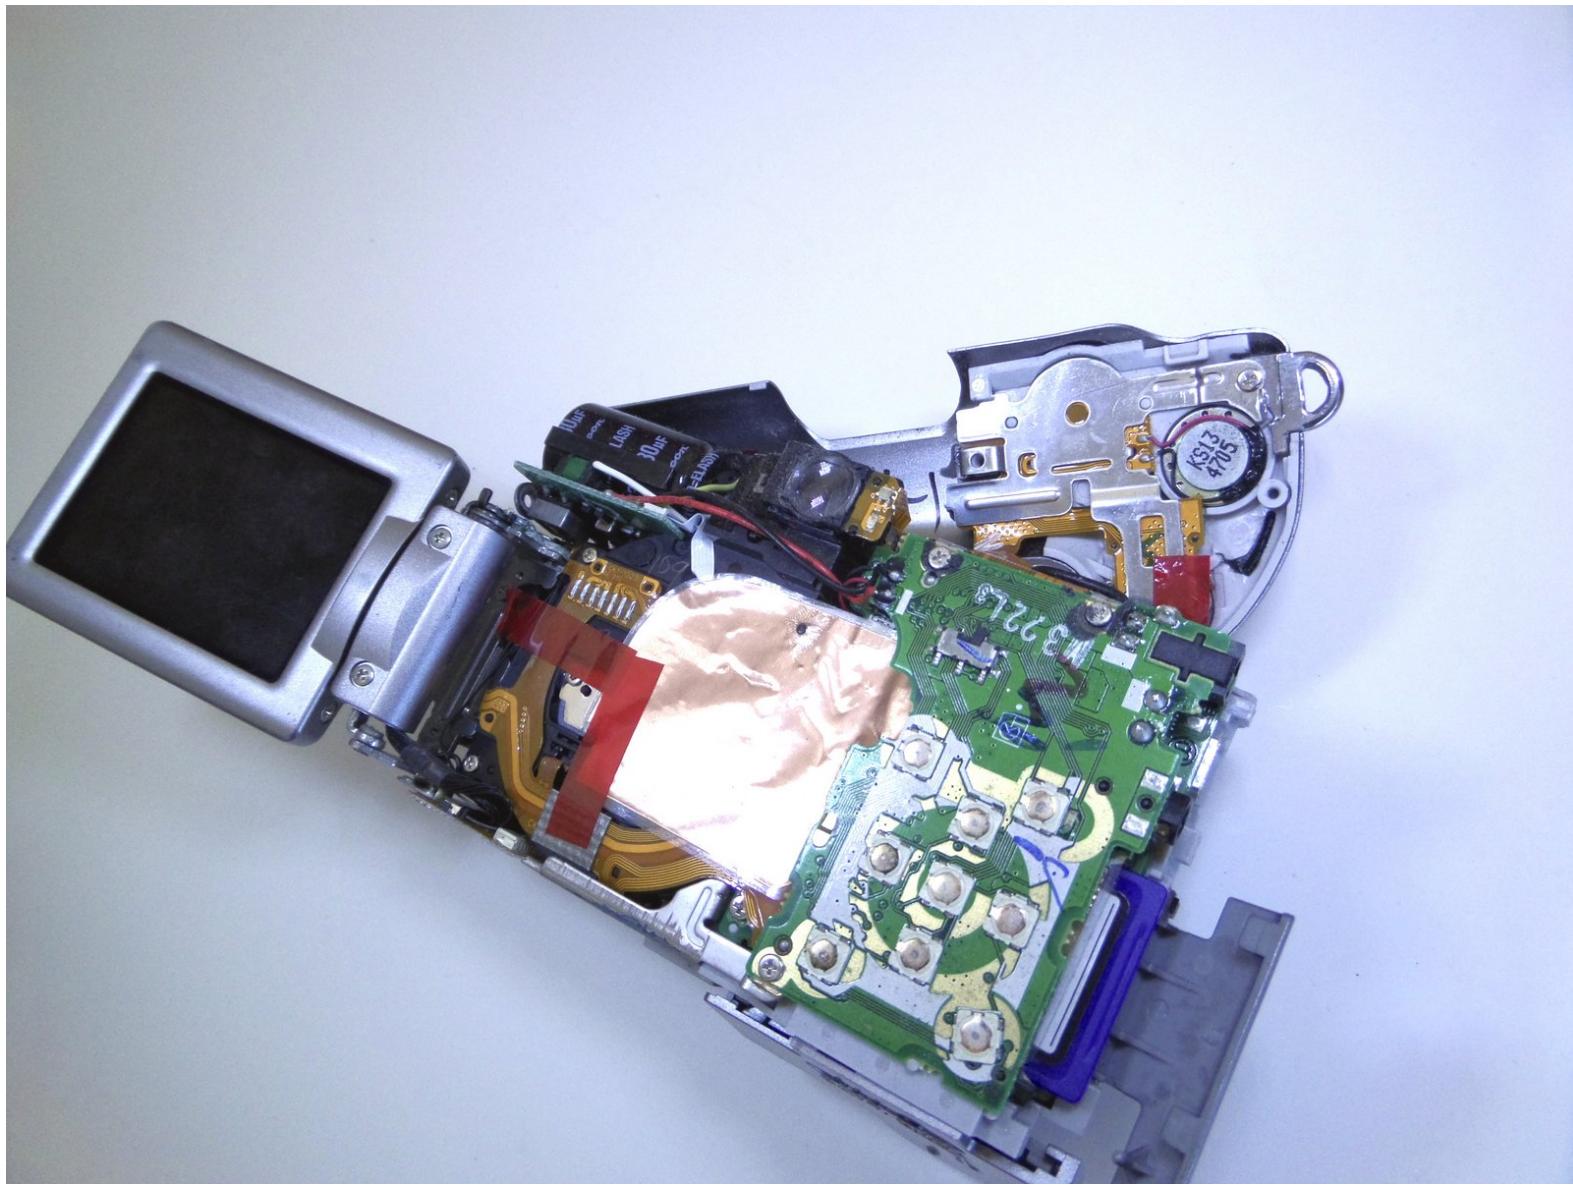

 **TOOLS:**

- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Side Panel

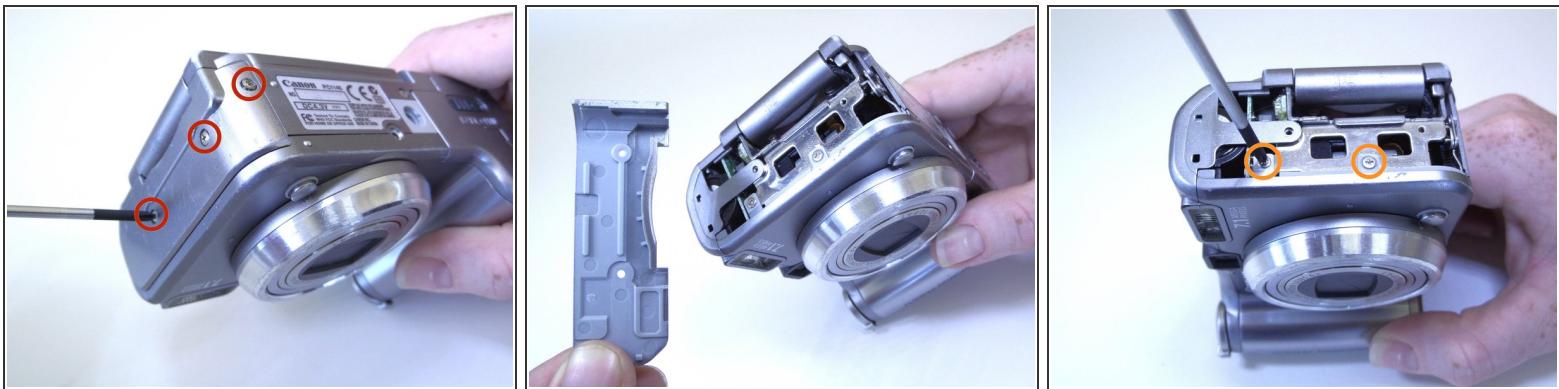


- Unscrew the three Phillips #00 1.6x3mm screws on the side.
- Lift loose panel from the case.
- Unscrew the two Phillips #00 1.6x3mm screws that were previously hidden beneath the panel.

Step 2 — Bottom Panel



- Unscrew the two Phillips #00 1.6x3mm screws on the bottom panel.

Step 3 — Battery Compartment

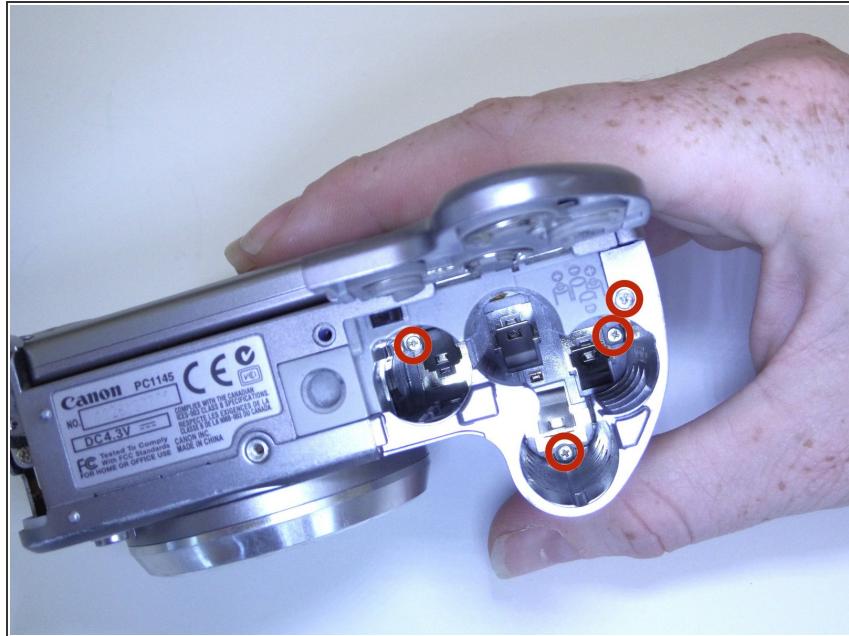

- Open the battery door.
- Unscrew the four Phillips #00 1.6x3mm screws in the battery compartment.

Step 4 — Terminal Cover



- Lift the terminal cover on the side of the camera.
- Unscrew the three Phillips #00 1.6x3mm screws beneath the terminal cover.


Step 5 — Top Panel



- Gently pull the top panel to separate it from the case.

(i) Although the top panel will now be free from the rest of the case, it will still be attached to the camera by a ribbon cable.


Step 6 — Front Panel

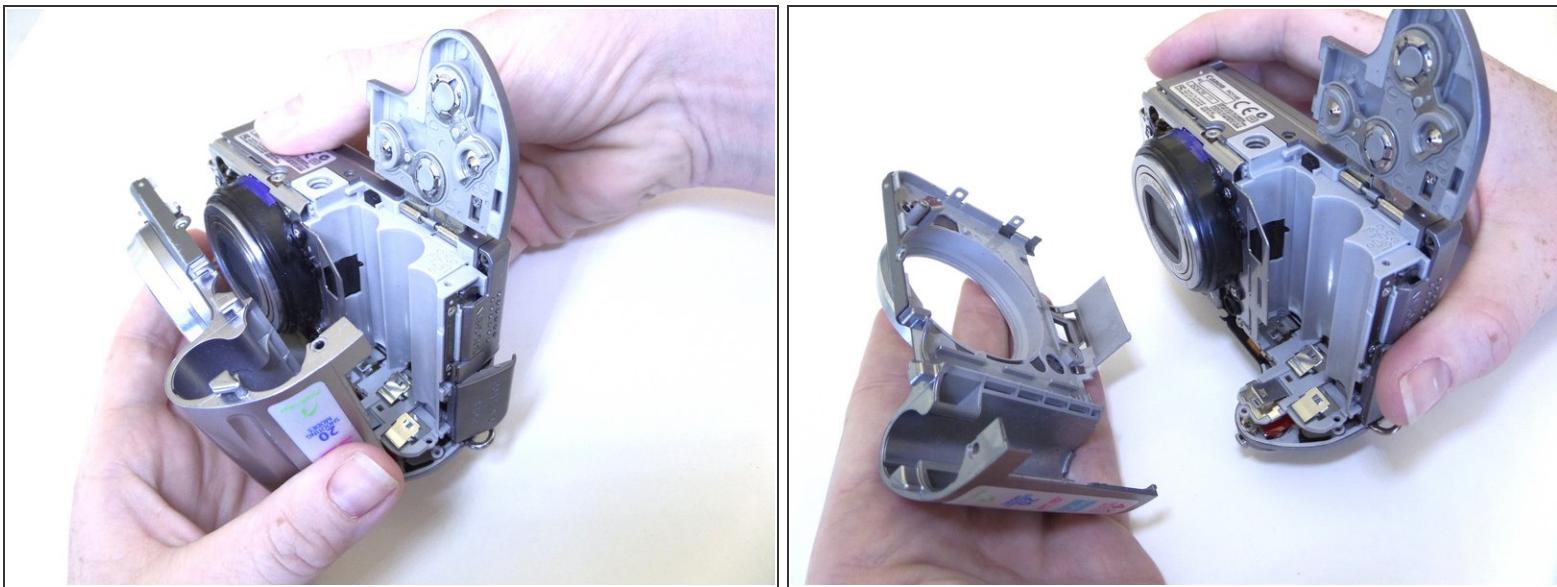

- Gently pull the front panel to separate it from the camera.


(i) The battery terminals are easy to access from this step.

Step 7 — Terminal Cover

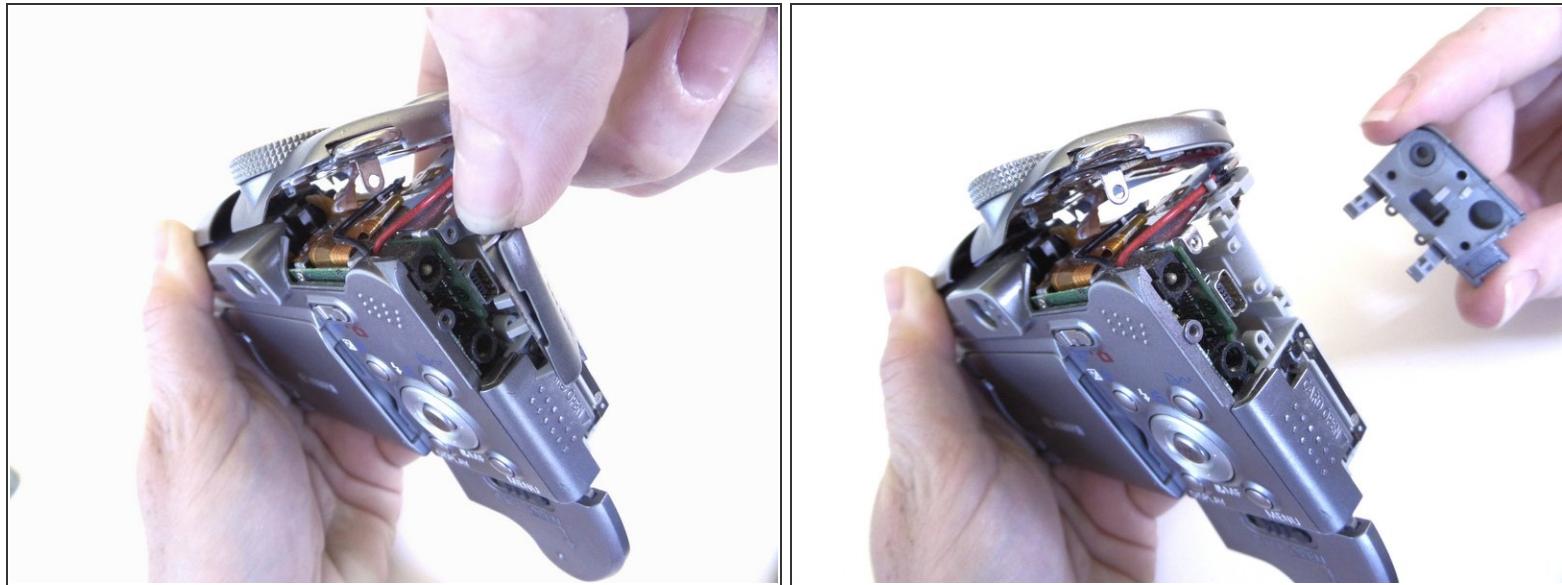


- Gently pull the terminal cover to separate it from the camera.

Step 8 — Memory Card Cover

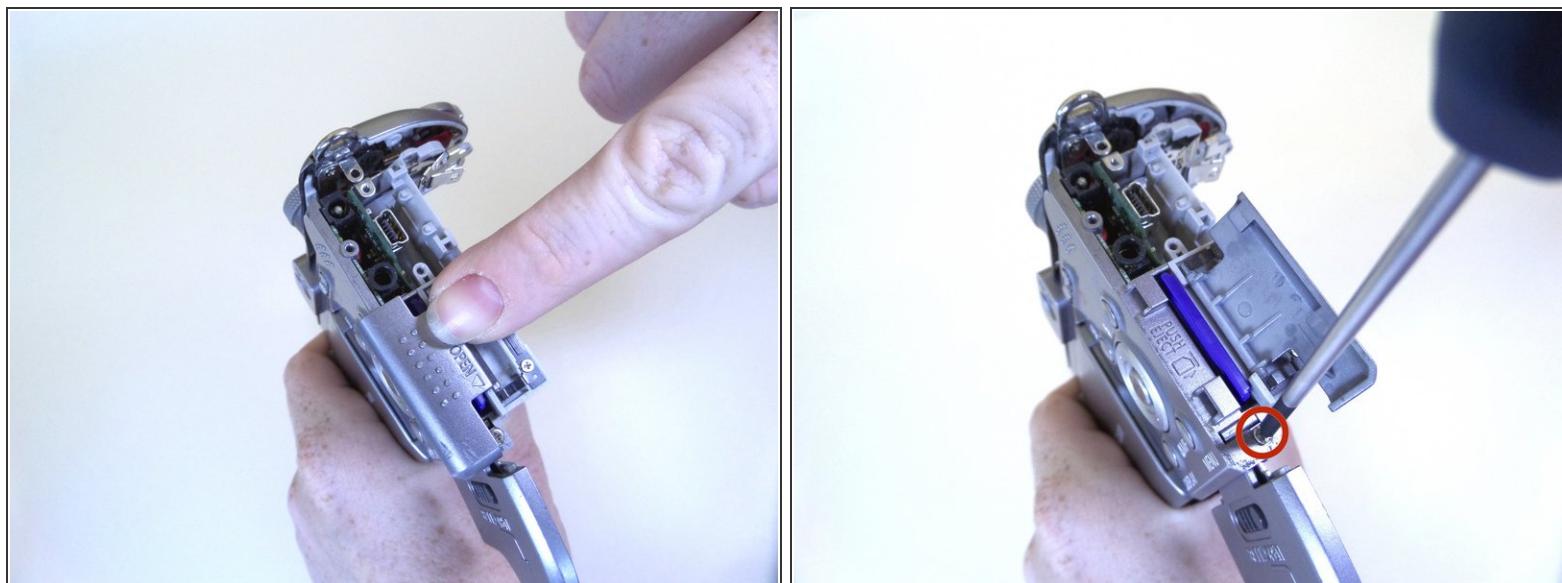


- Slide the memory card cover down.
- Unscrew the Phillips #00 1.6x3mm screw beneath the memory card cover.

Step 9 — Back Panel

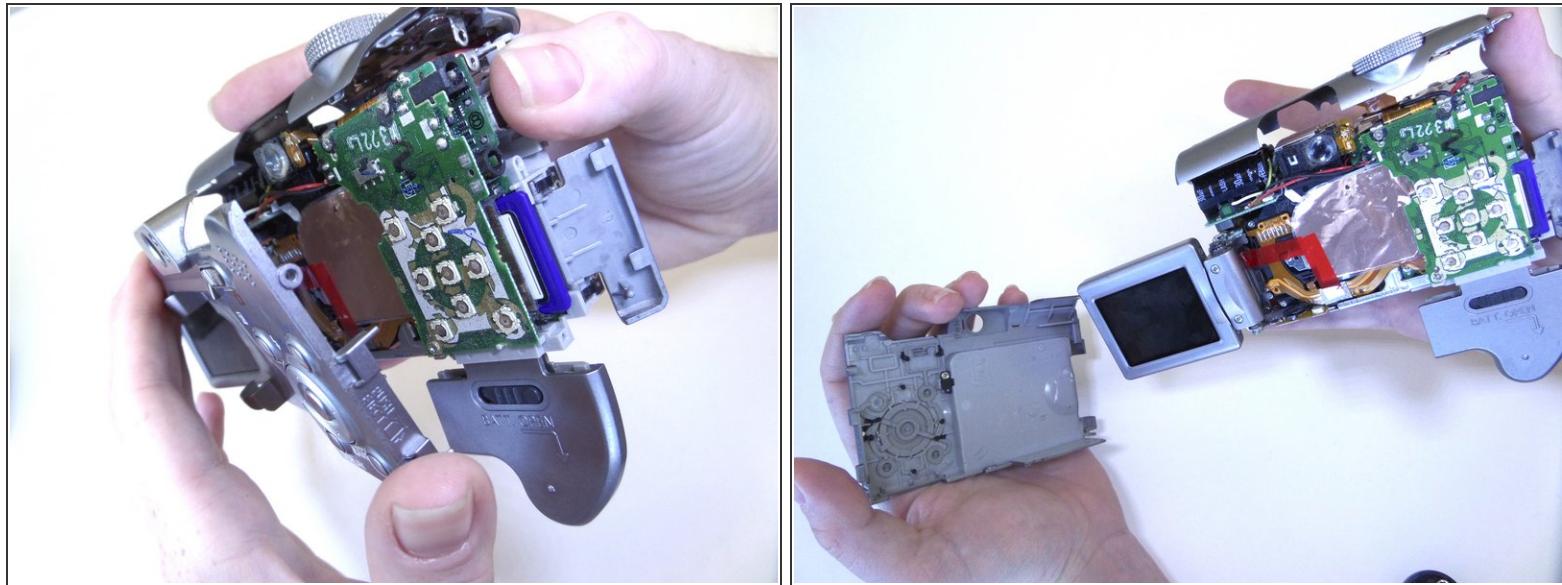


- Gently pull the back panel to separate it from the camera.

Step 10 — Metal Plate Screws

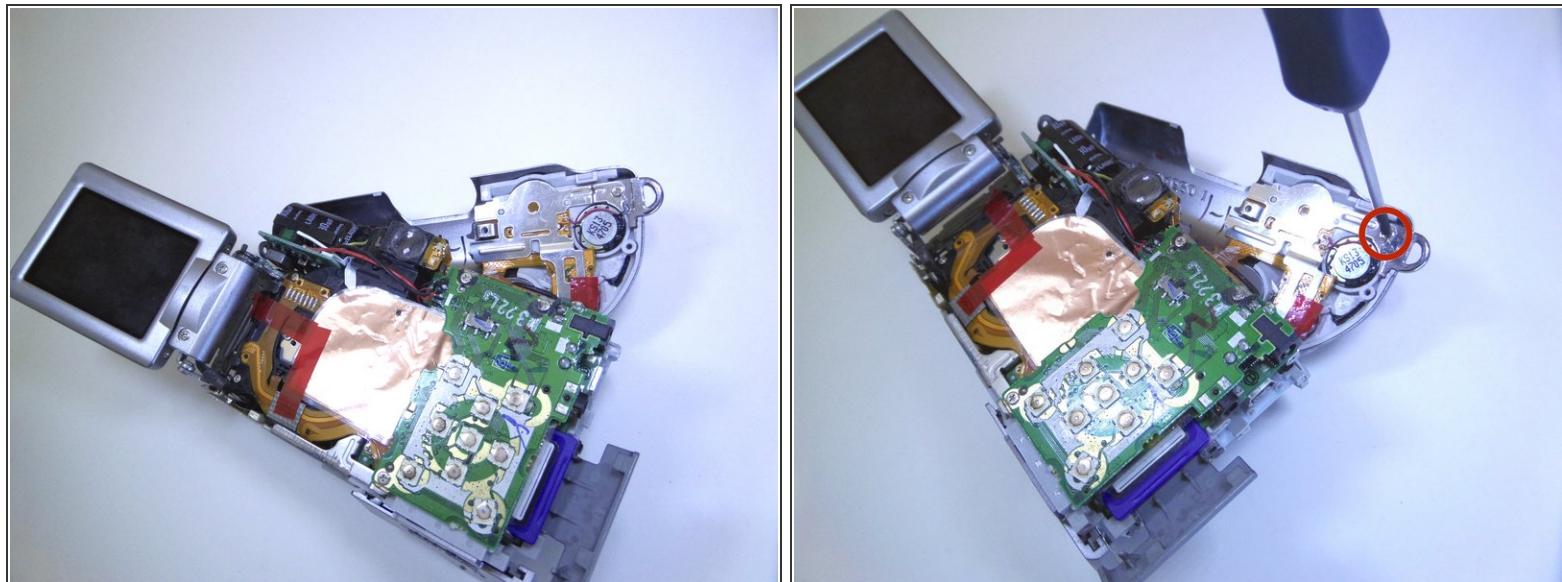



- Unscrew the Phillips #00 1.6x3mm screw located on the top panel.

Step 11 — Metal Plate

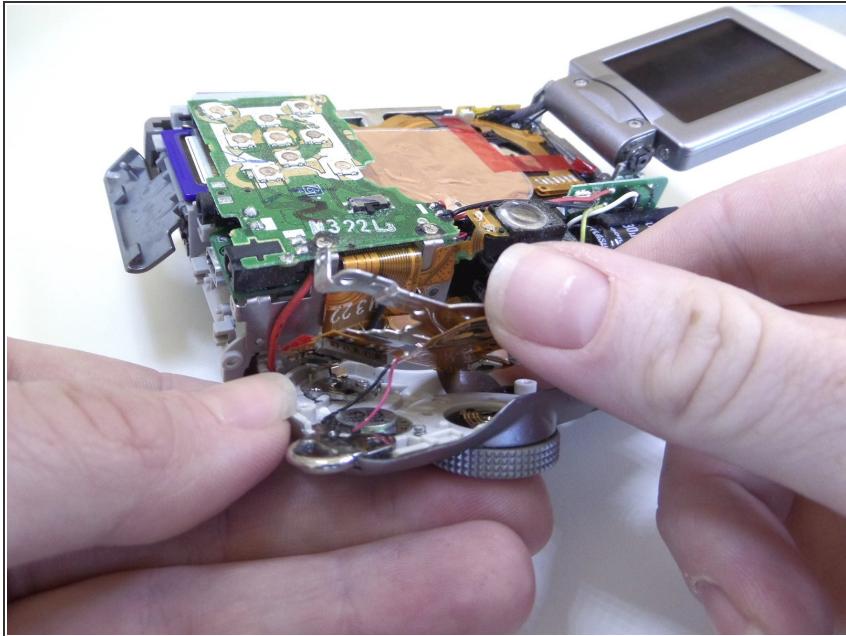

- Gently lift the metal plate and move it to the side.

Step 12 — Trigger Button Screws

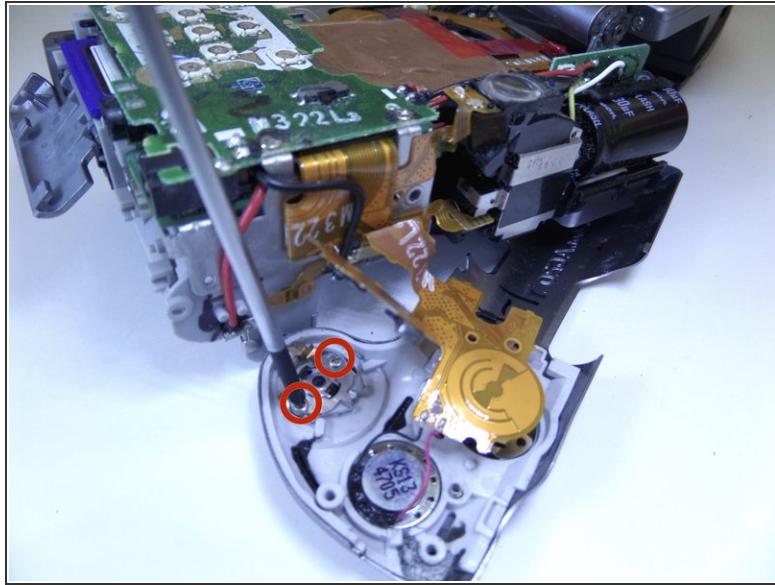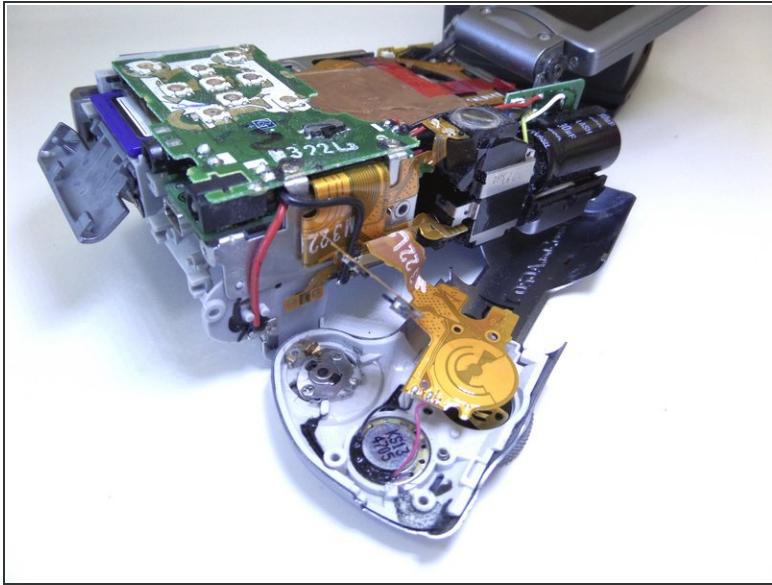

- Unscrew the two Phillips #00 1.6x3mm screws that hold in the trigger button.

Step 13 — Trigger Button



- The trigger button will fall off once the screws have been removed.

To reassemble your device, follow these instructions in reverse order.