



# Canon PowerShot SD850 IS Housing Replacement

Written By: iDeleted




## INTRODUCTION

This guide is for accessing the cameras internal components for repairs and troubleshooting.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)



## Step 1 — Housing

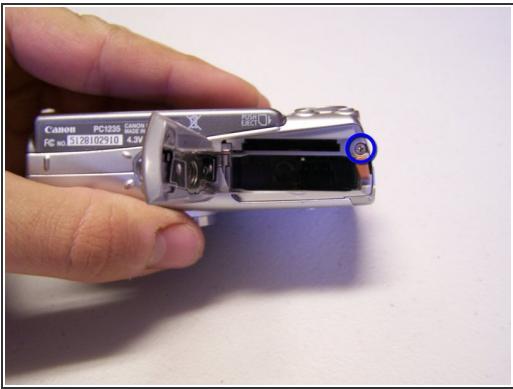

**⚠** To avoid severe electric shock do not remove or tamper with internal camera flash components. An electrical capacitor is attached to the flash that can discharge if contact is made.


- Remove the two side screws, indicated by the red circles, using a Phillips #00 screwdriver.
- Remove the screw in the battery port, indicated by the blue circle, again using a Phillips #00 screwdriver.
- Remove the front face by gently peeling the housing away from the camera.

## Step 2

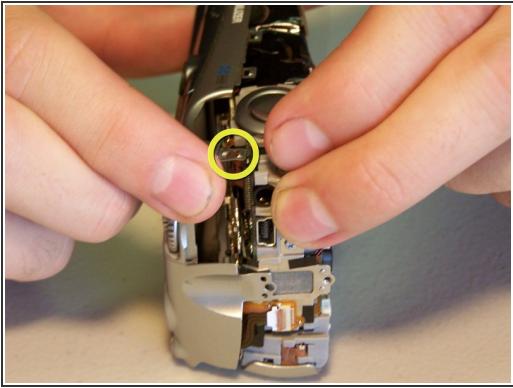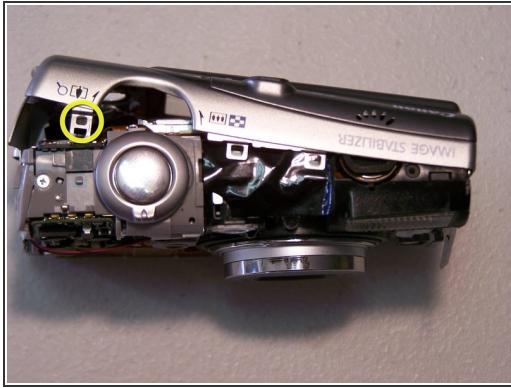

- Remove the back face by using a spudger to lift the tab highlighted in yellow
- Pivot the back face clockwise as seen in the second photo.

## Step 3

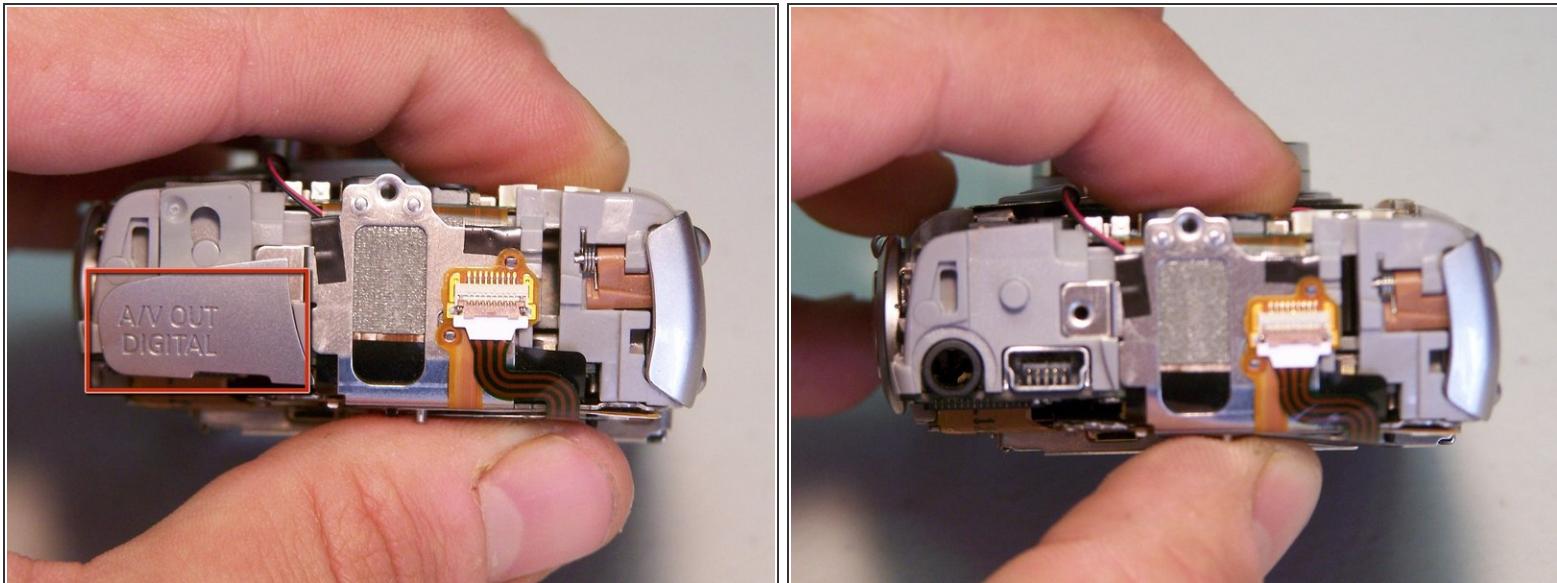

- Remove the A/V port cover [no tools are necessary]

To reassemble your device, follow these instructions in reverse order.