



Casio G'zOne Commando Verizon MIL-SPEC

Camera Replacement

In this guide, we will be replacing the camera on the rear side of the Casio G'zOne Commando Verizon MIL-SPEC with a brand new one.

Written By: Zack Almeida



This document was generated on 2020-04-04 06:58:47 AM (MST).

INTRODUCTION

In this guide, we will be completely disassembling the phone down to the core to remove the camera and replacing it with a new one.

TOOLS:

- [Tri-point Y0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Battery



- Slide the slider on the back of the phone to the free position.

Step 2



- Using a plastic opening tool, gently lift open the back panel from bottom of the panel.

Step 3



- Pull the white battery tab upwards and remove the battery.

Step 4 — Motherboard



- Remove the four 6mm Y0 screws from the corners of the device.

Step 5



- Remove the four 5mm Y0 screws from the back of the device.

Step 6




- Using a spudger, pry away the motherboard from its compartment, by inserting the spudger in the compartment and lifting upwards until fully out.

Step 7




- Lastly, using your hands, separate the motherboard from its compartment.

Step 8 — Camera

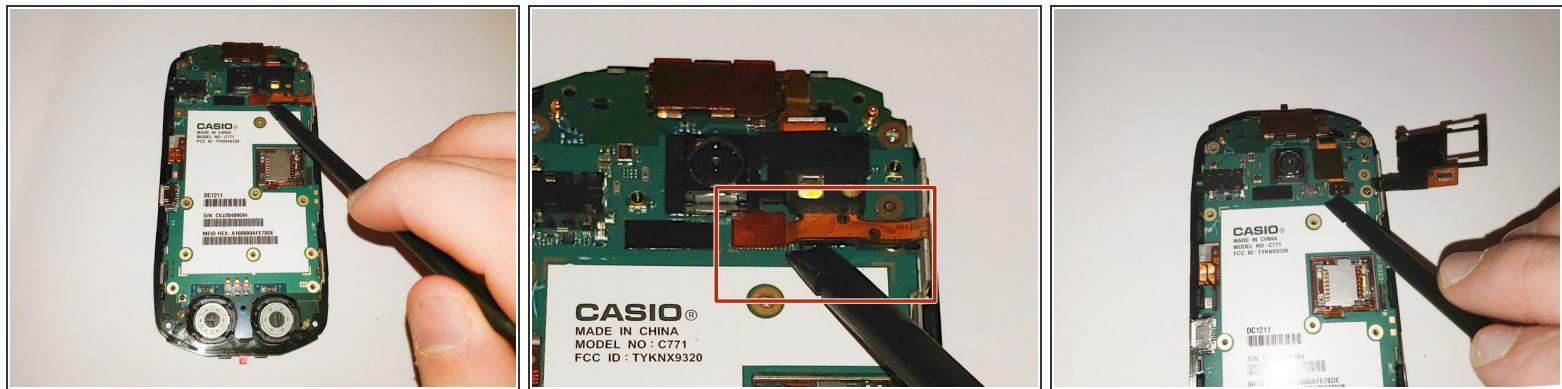

- Using a spudger, gently lift up the orange connector.

Step 9

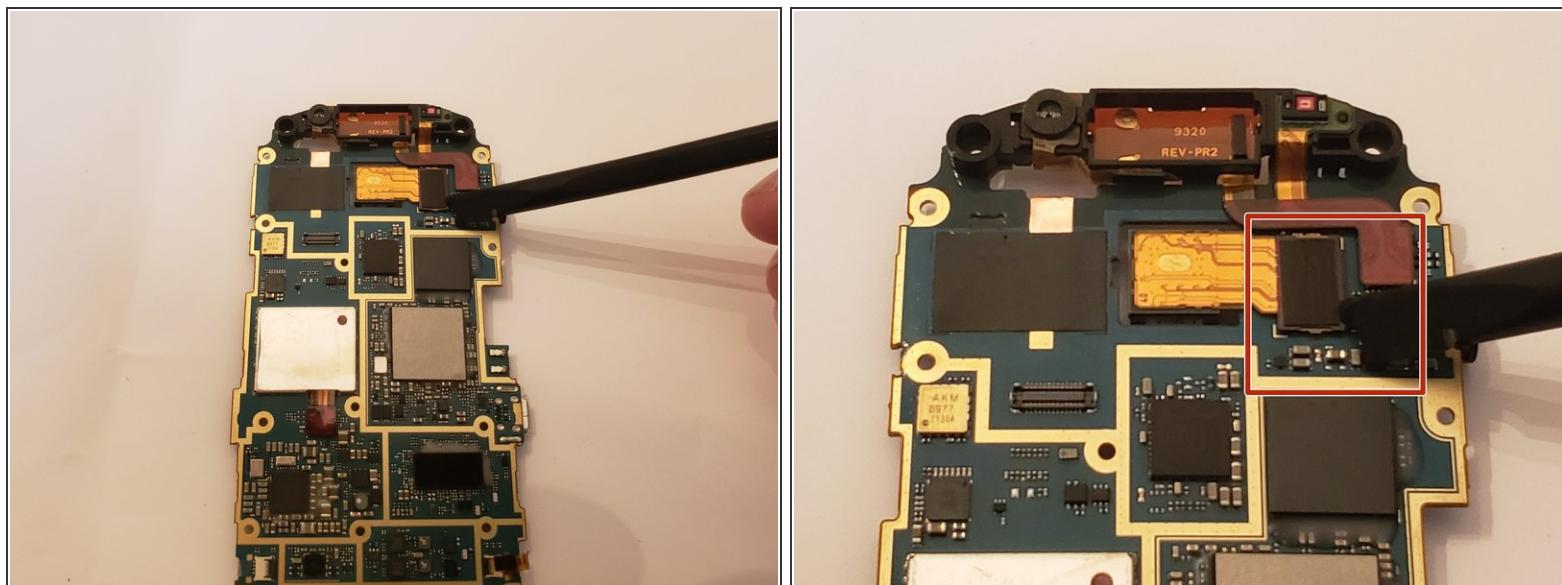

- Flip over the motherboard
- Using a spudger, lift up the small black connector and remove the camera.

To reassemble your device, follow these instructions in reverse order.