



Chromo Inc. T2 Battery Replacement

This will guide you in replacing your battery!

Written By: Ismael DeLuna



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Removing the Casing




- Place your Plastic Opening Tool between the screen and the case. Slowly move it around the casing while prying in a downward motion to undo the hinges holding the two together and separate the two parts.

Step 2 — Turn it around

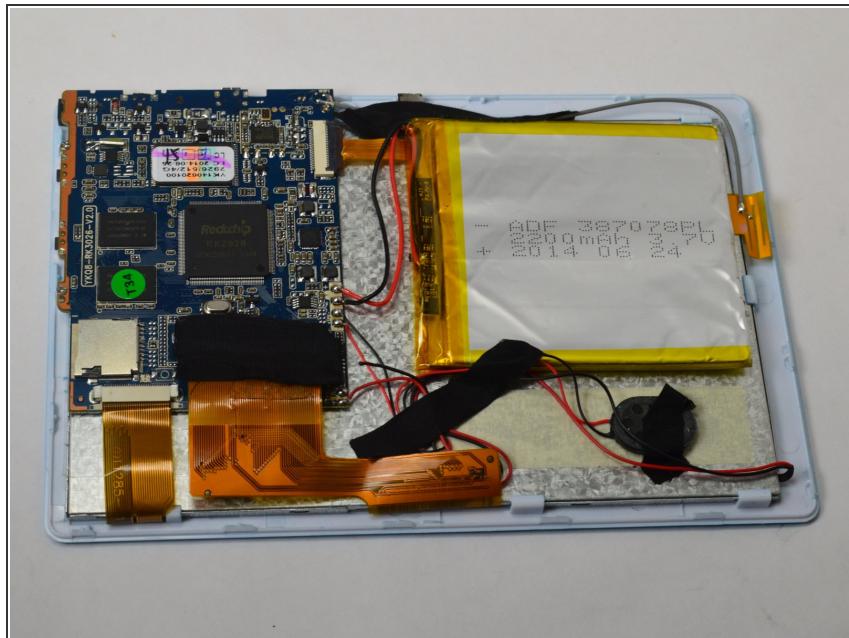


- After separating the case and screen, turn your screen face down so you can see the internal parts!

Step 3 — Freeing the Battery

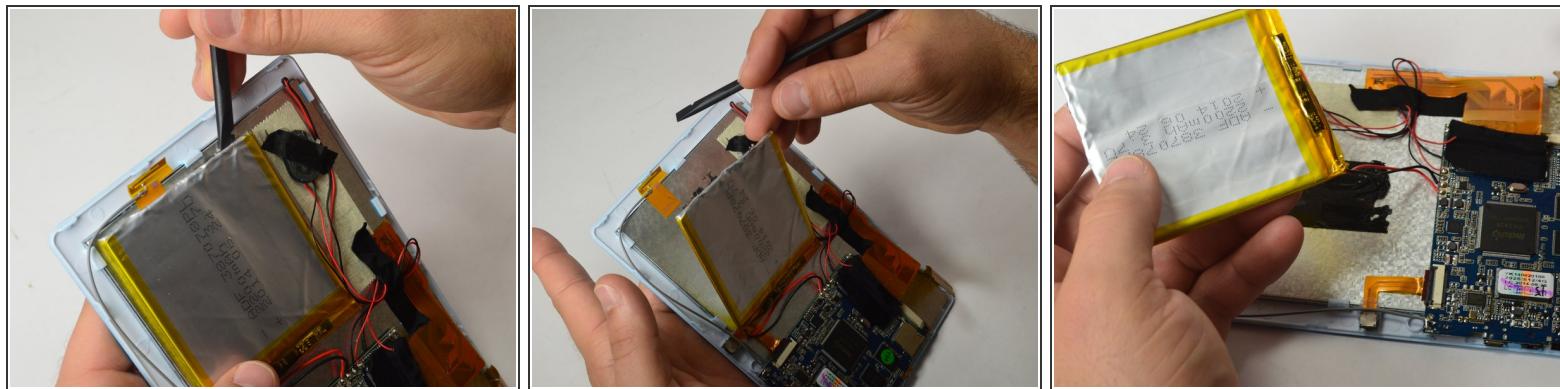

- Using the Spudger, going between the battery and screen, pry the battery off from the tablet.
- Note: This will require a little extra force due to the tape holding down the battery!


Step 4 — Desoldering the Battery Wires

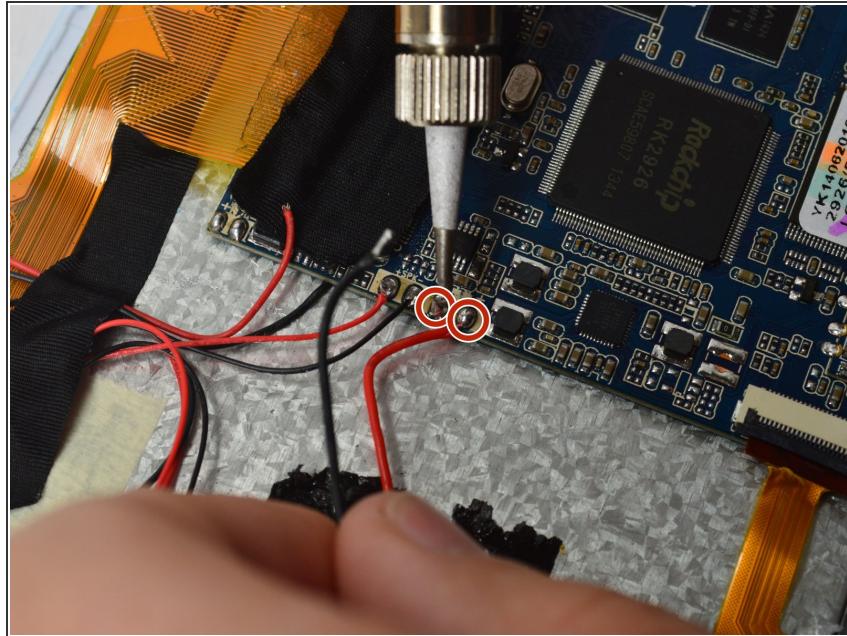

- Using a Soldering Iron, desolder both Battery wires.

⚠ Soldering Iron gets very hot, take care to not touch anywhere on the soldering iron except for the handle!

Step 5 — Finished!

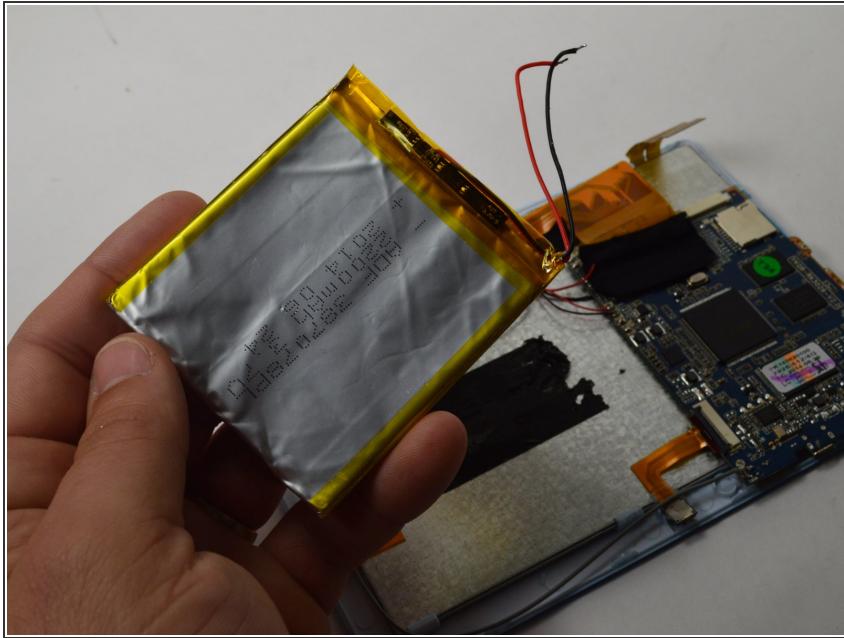

- Your battery is now ready to be replaced!

To reassemble your device, follow these instructions in reverse order.