



Chromo Inc. T2 Internal Speaker Replacement

Written By: Ismael DeLuna



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)

Step 1 — Removing the Casing




- Using your Plastic Opening Tool, place it in between the screen and the case. Slowly move it around the casing while prying in a downward motion to undo the hinges holding the two together and separate the two parts.

Step 2 — Turn it around

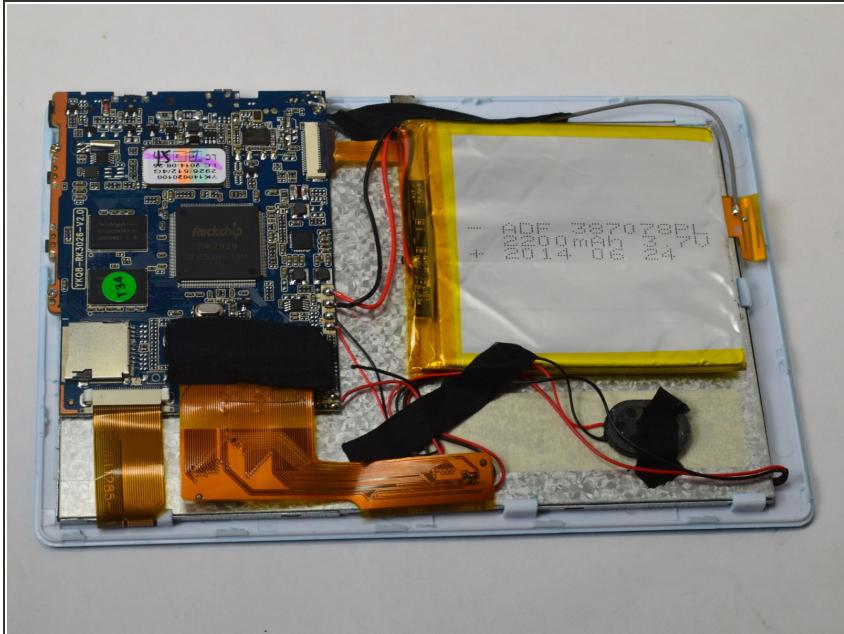


- After separating the case and screen, turn your screen face down so you can see the internal parts!

Step 3 — Removing the Tape

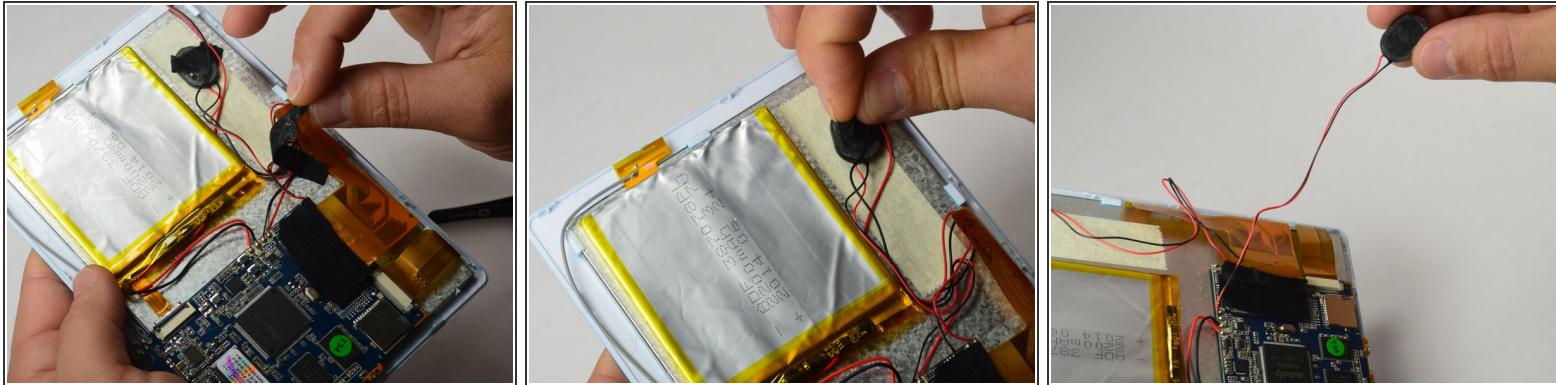

- Remove two strips of tape: One holding down the wires and the other holding down the internal speaker.

Step 4 — Desoldering the Wires and Removing the Speaker

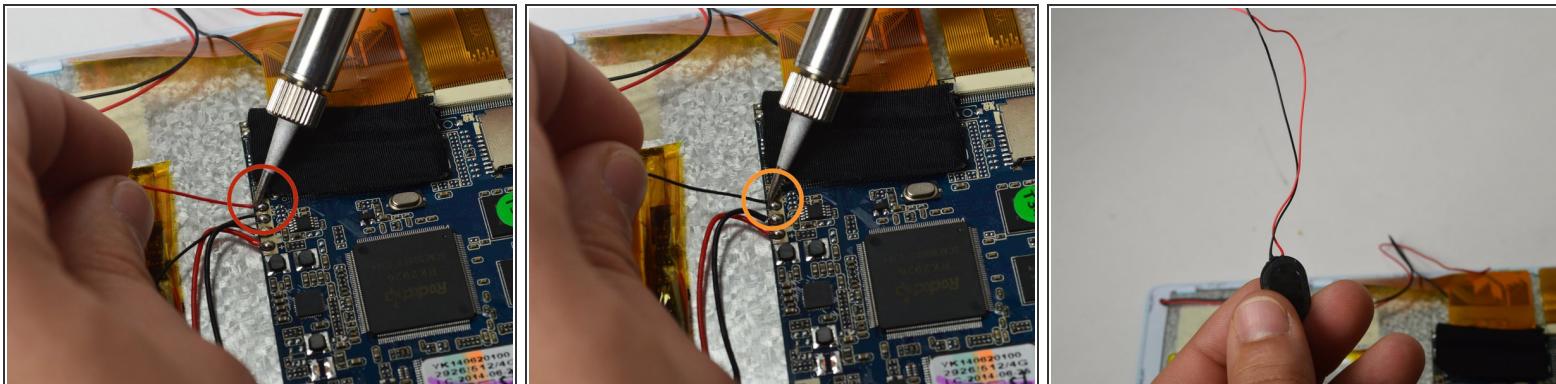

- Using a Soldering Iron, desolder both speaker wires. Once both wires are desoldered, your Internal Speaker is now ready for replacement!

 Soldering Iron gets very hot, take care to not touch anywhere on the soldering iron except for the handle!

To reassemble your device, follow these instructions in reverse order.