




Cineyo BT-03 Device Speaker Replacement

This guide will allow you to replace the speaker(s).

Written By: Rene Klopf

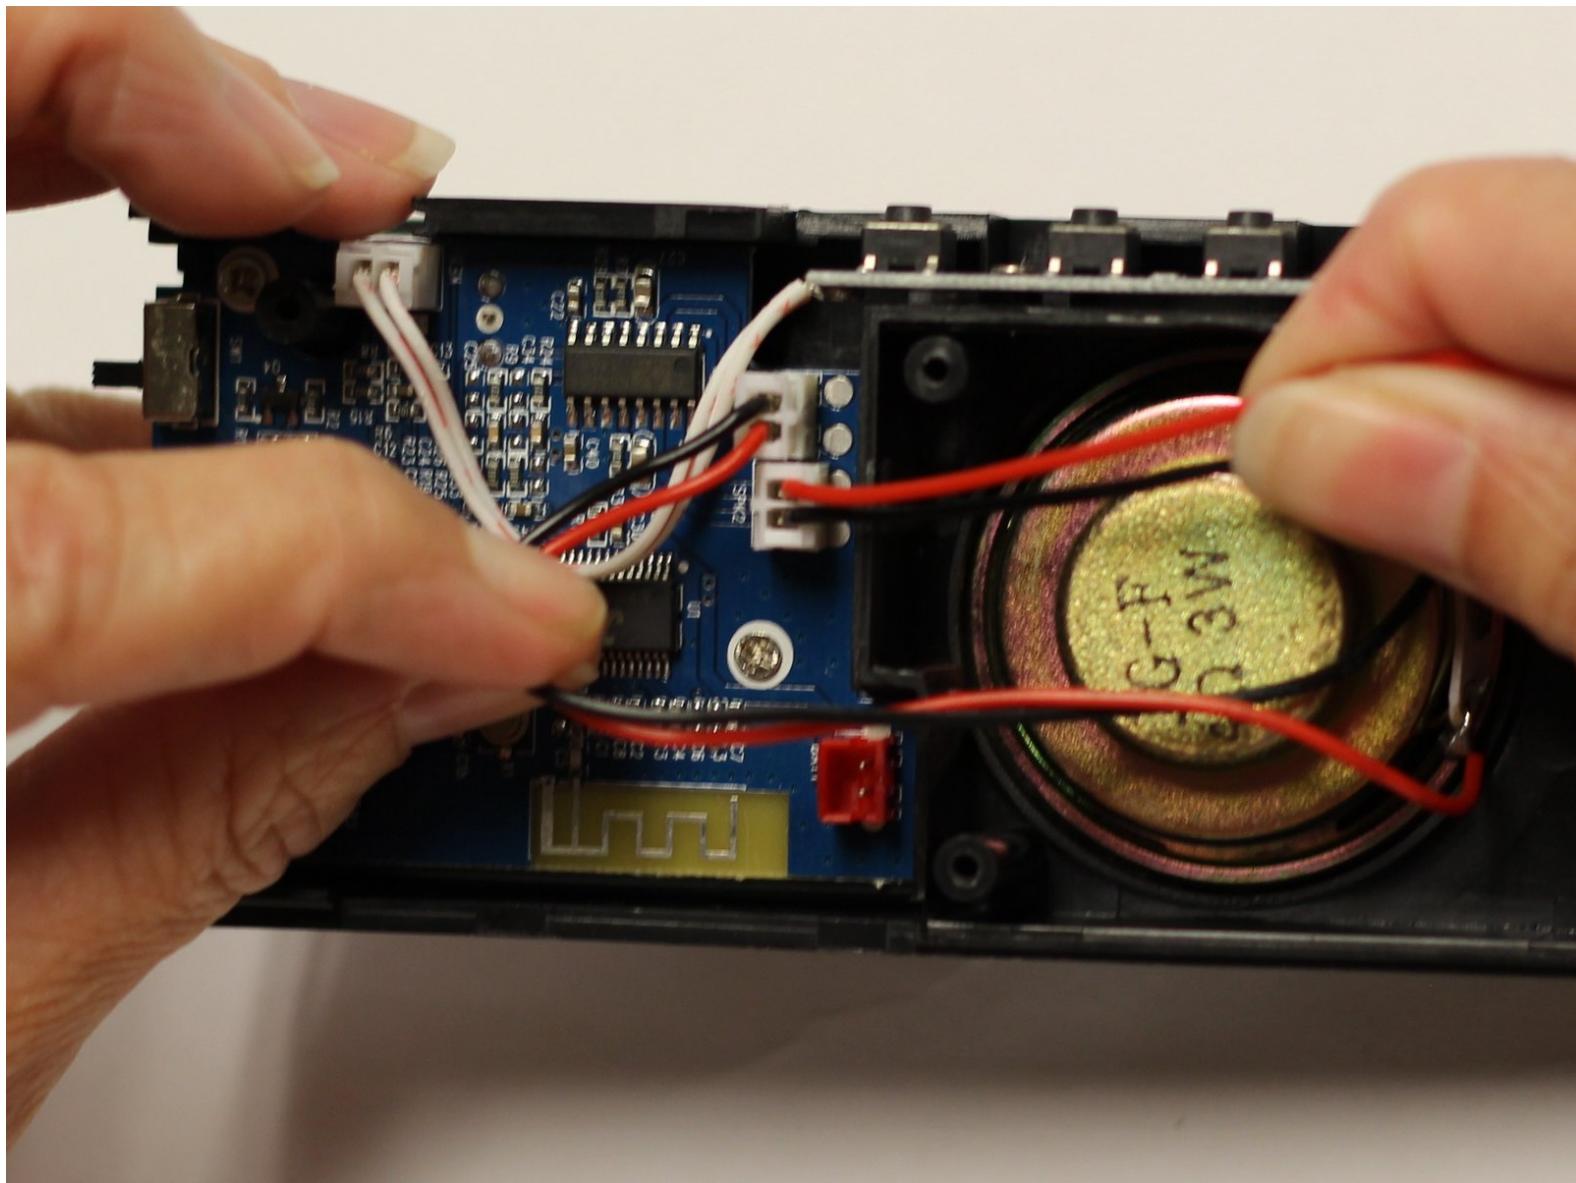

INTRODUCTION

This guide will take you step by step through the process of replacing your speakers.

TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)
- [Portable Soldering Iron \(1\)](#)

Step 1 — Cineyo BT-03 Device Disassembly




- Remove the top (button side) rubber cover using your hands.

Step 2



- Flip over the device and remove the bottom rubber cover using your hands.

Step 3

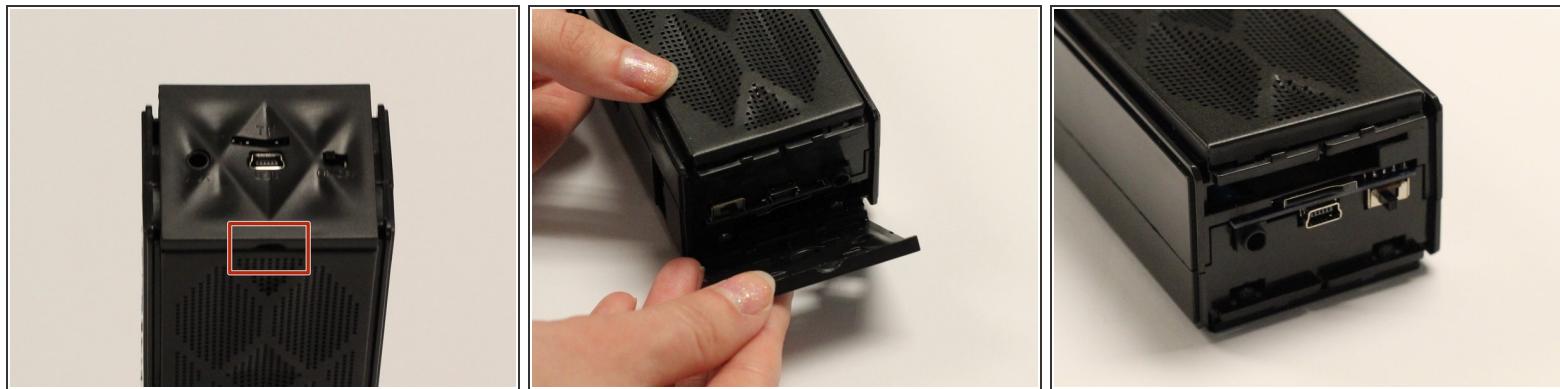

- Using your hands, pull off the plastic side cover (on the side with the audio jack) using the indented tab. The indented tab has been highlighted in the picture.

Step 4



- Detach the plastic speaker cover on both the front and back sides. Then slide the cover off of the device.


(i) The cover should remain as one solid piece.

Step 5




- Remove the five 1 cm screws on the back side (opposite of the speakers) of the device using a Phillips #1 screwdriver.

Step 6

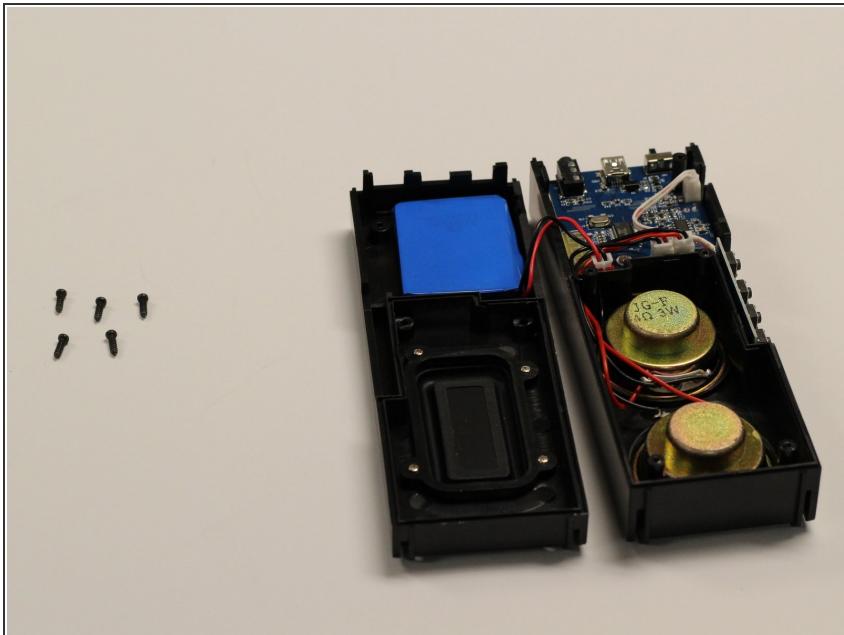


- Gently pull apart the two sections of the device.

Step 7 — Speaker

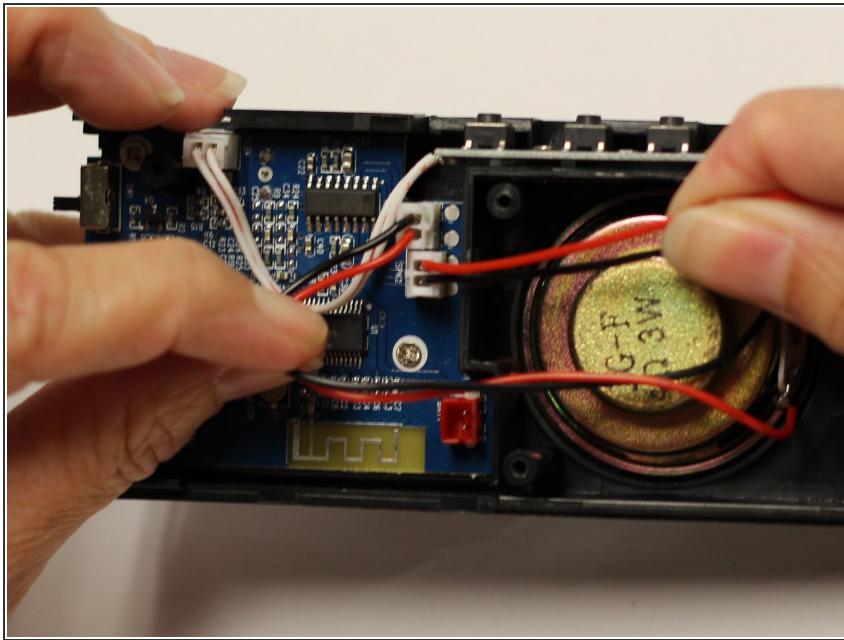


- Separate the wires so that each white cap distinctly has a single red and single black wire coming out of it.
- *(i)* This is to make it safe and easy to disconnect the wires.

Step 8

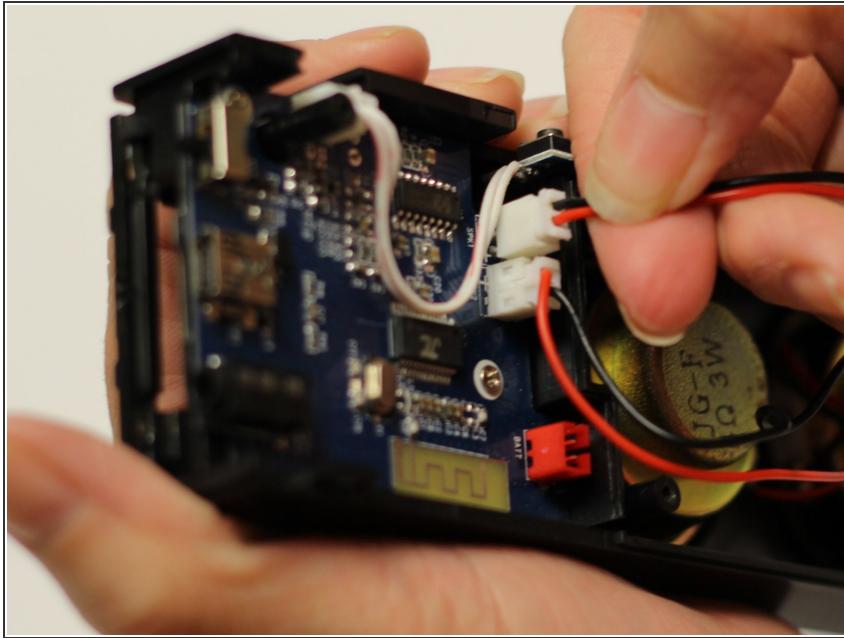

- Disconnect the two sets of wires by pulling on the wires until the white cap detaches from the circuit board.
- *(i)* Make sure to leave the white casing attached to the circuit board.

Step 9

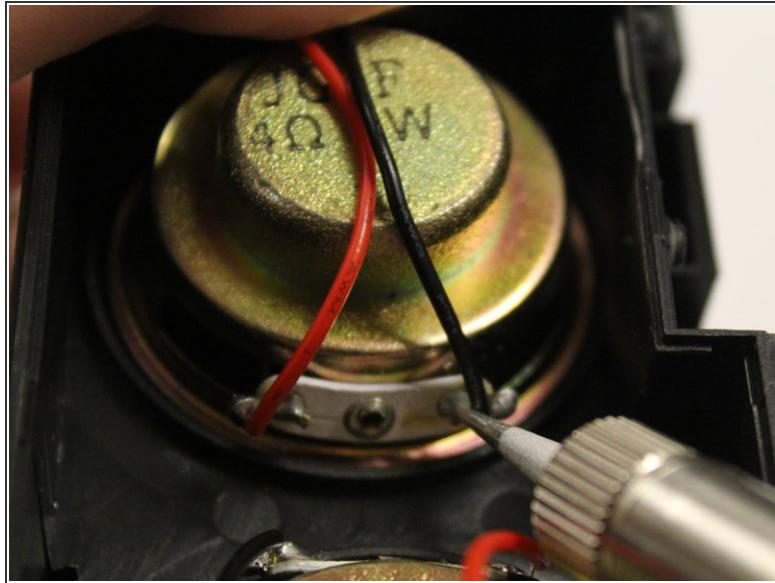

- Detach the solder points on each gold speaker in order to release and remove them.

(i) For help soldering, please review iFixit's [Soldering Guide](#).

To reassemble your device, follow these instructions in reverse order.