



Cirago M9030 Screen Protector Replacement

This guide shows how to install the screen protector.

Written By: Ryan Sutardji



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Cover



- Using a Phillips #00 screwdriver, remove the four 1.1mm long screws from the top side.

Step 2



- Using a Phillips #00 screwdriver, remove the four 1.1mm long screws from the bottom side.

i Remove the warranty sticker across the bottom.

Step 3




- Gently lift off the back and front casing.
- *i* The outer shell should easily come apart.

Step 4 — Hard Drive




- Make sure the device screen is face down.

Step 5

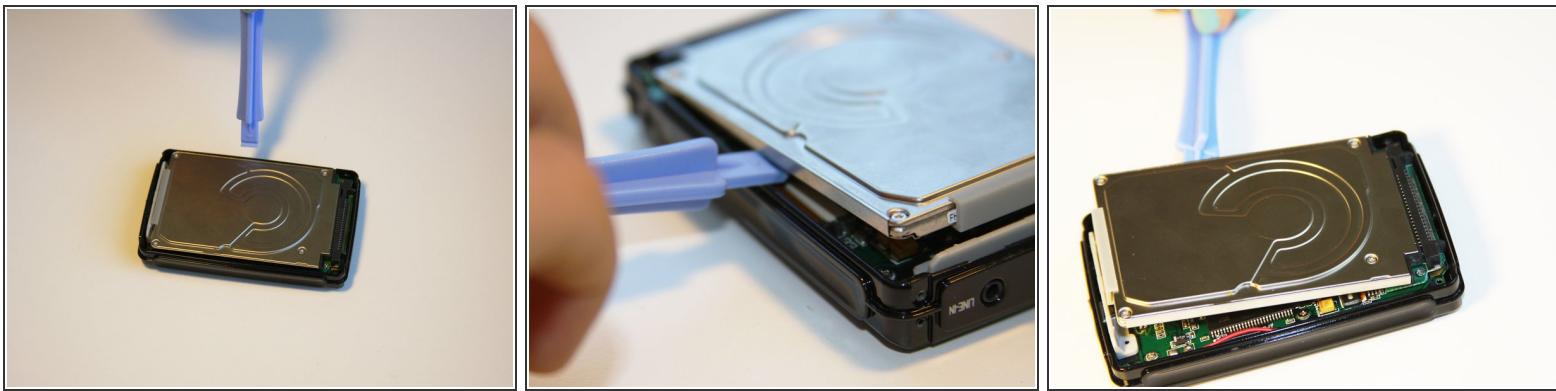


- Using the plastic opening tool, wedge the tool underneath the bottom left edge of the hard drive.
- Raise the bottom edge of the hard drive 15 degrees up from the device.

Step 6

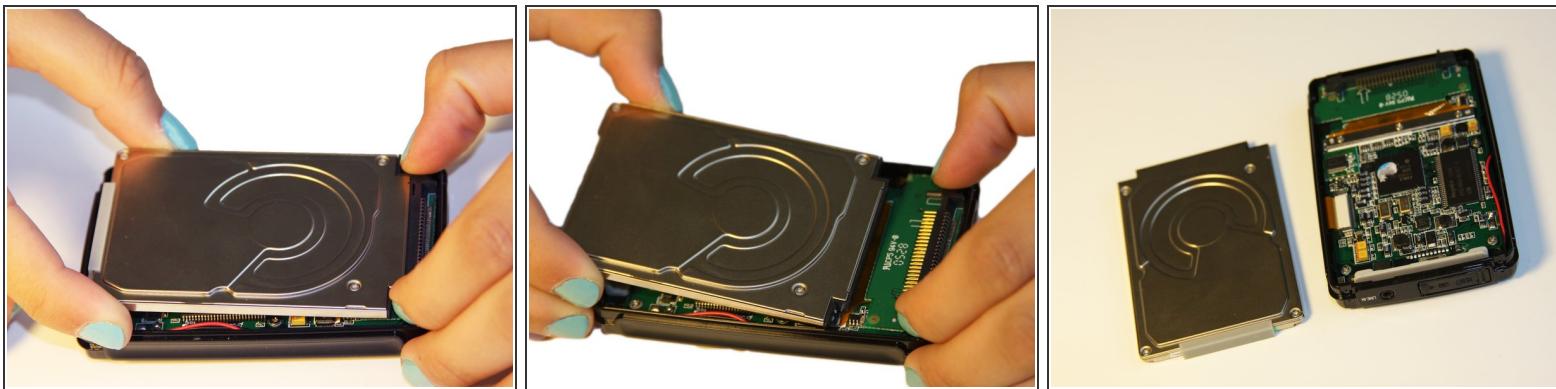

- Place fingers on the IDE connectors and gently slide the hard drive out from the IDE module.

Step 7 — IDE Connector

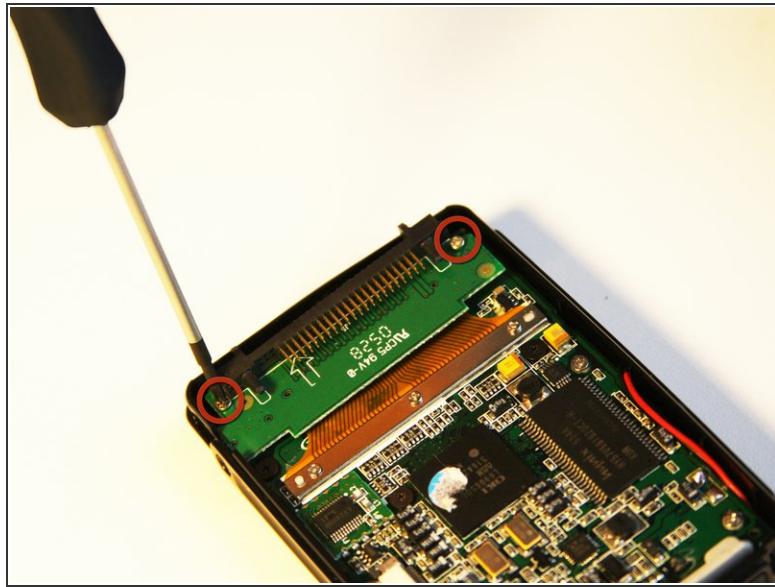


- Using the Phillips #00 screwdriver, unscrew the two 1.5mm long screws holding the IDE connector to the motherboard.

Step 8




- Using the Phillips #00 screwdriver, unscrew the three 1.5mm long screws on the metal bracket.

Step 9

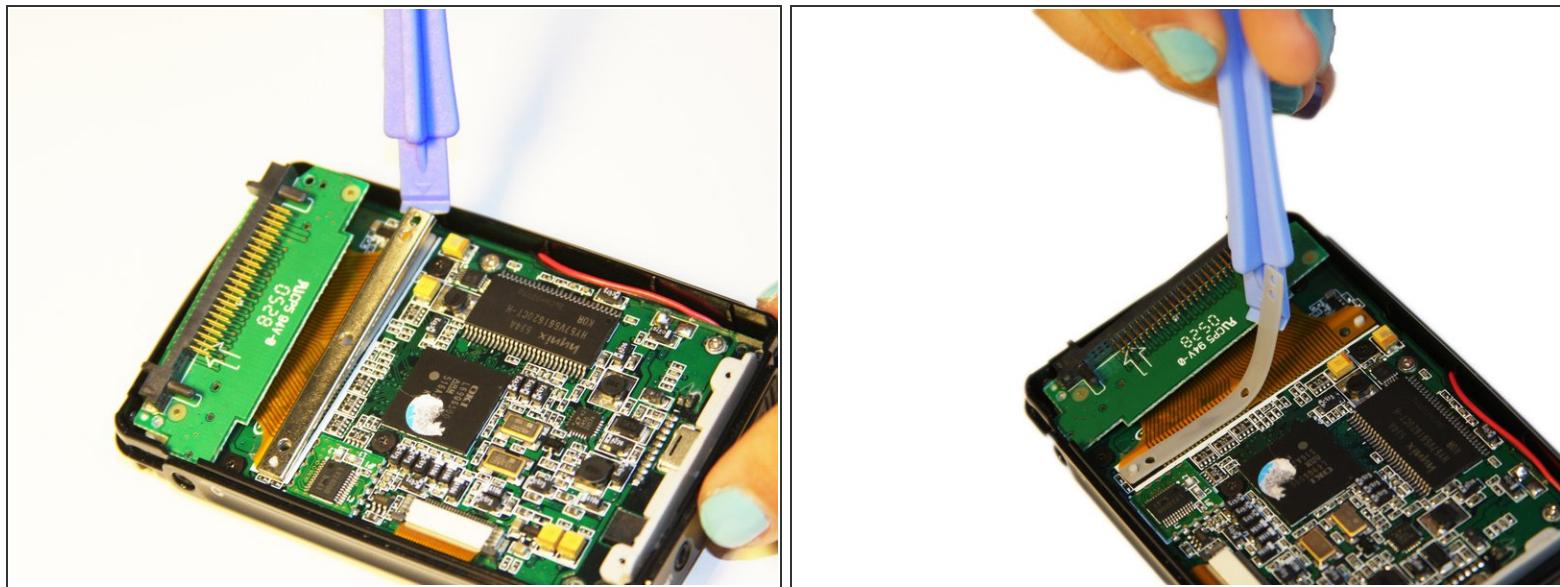


- Using the plastic opening tool, completely lift the metal bracket off of the motherboard.
- Using the plastic opening tool, completely lift the rubber insulator off of the motherboard.

Step 10

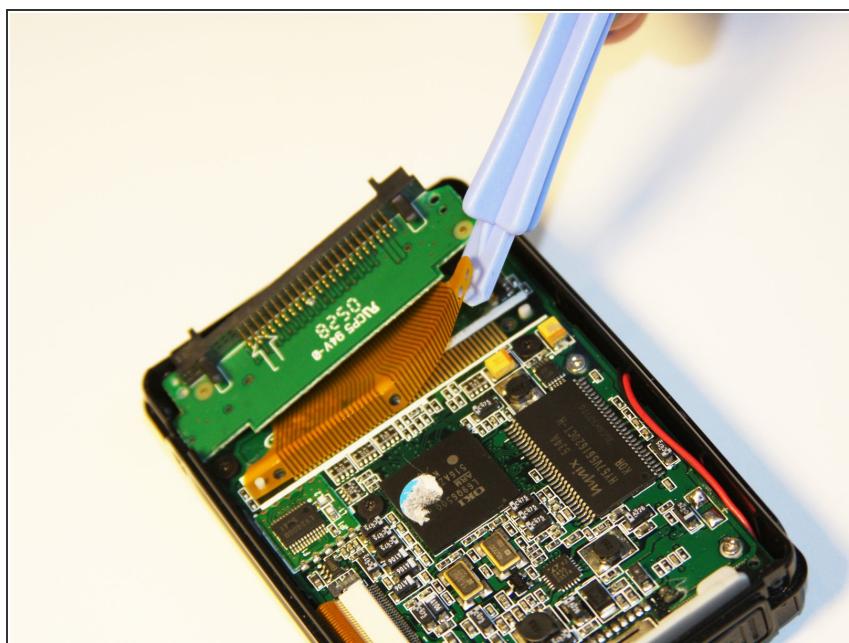

- Using the plastic opening tool, completely lift the ribbon off of the motherboard.


Step 11

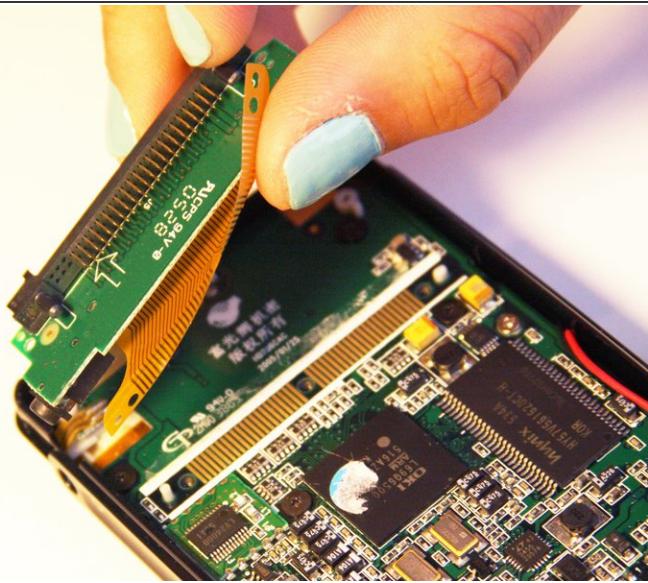

- Completely remove the IDE connector from the device.

⚠ The audio jack is attached to the IDE connector. Pull at a 45 degree angle from the audio jack.

Step 12 — Motherboard

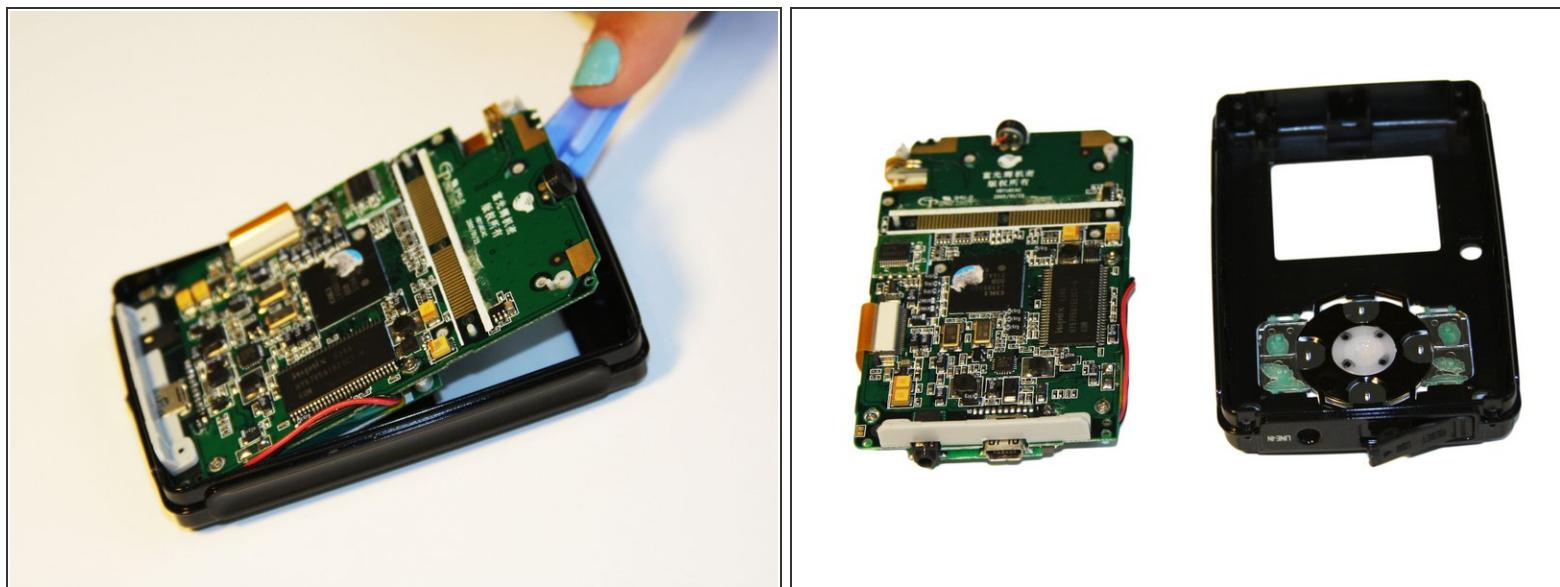

- Using the plastic opening tool, wedge the tool underneath the top edge of the motherboard.
- Completely remove the motherboard.

(i) The motherboard should slide out easily.

Step 13 — Screen Protector



- Locate the plastic screen protector on the front cover.

Step 14



- Grasping the sides of the cover, gently press on screen protector from the inside of the front cover to pop out the screen protector.

To reassemble your device, follow these instructions in reverse order.