




Classen Over Seeder TS20HD 2012 Belt Guard Replacement

This guide show how to remove the belt guard in order to access the belt and pulley.

Written By: Arthur Shi

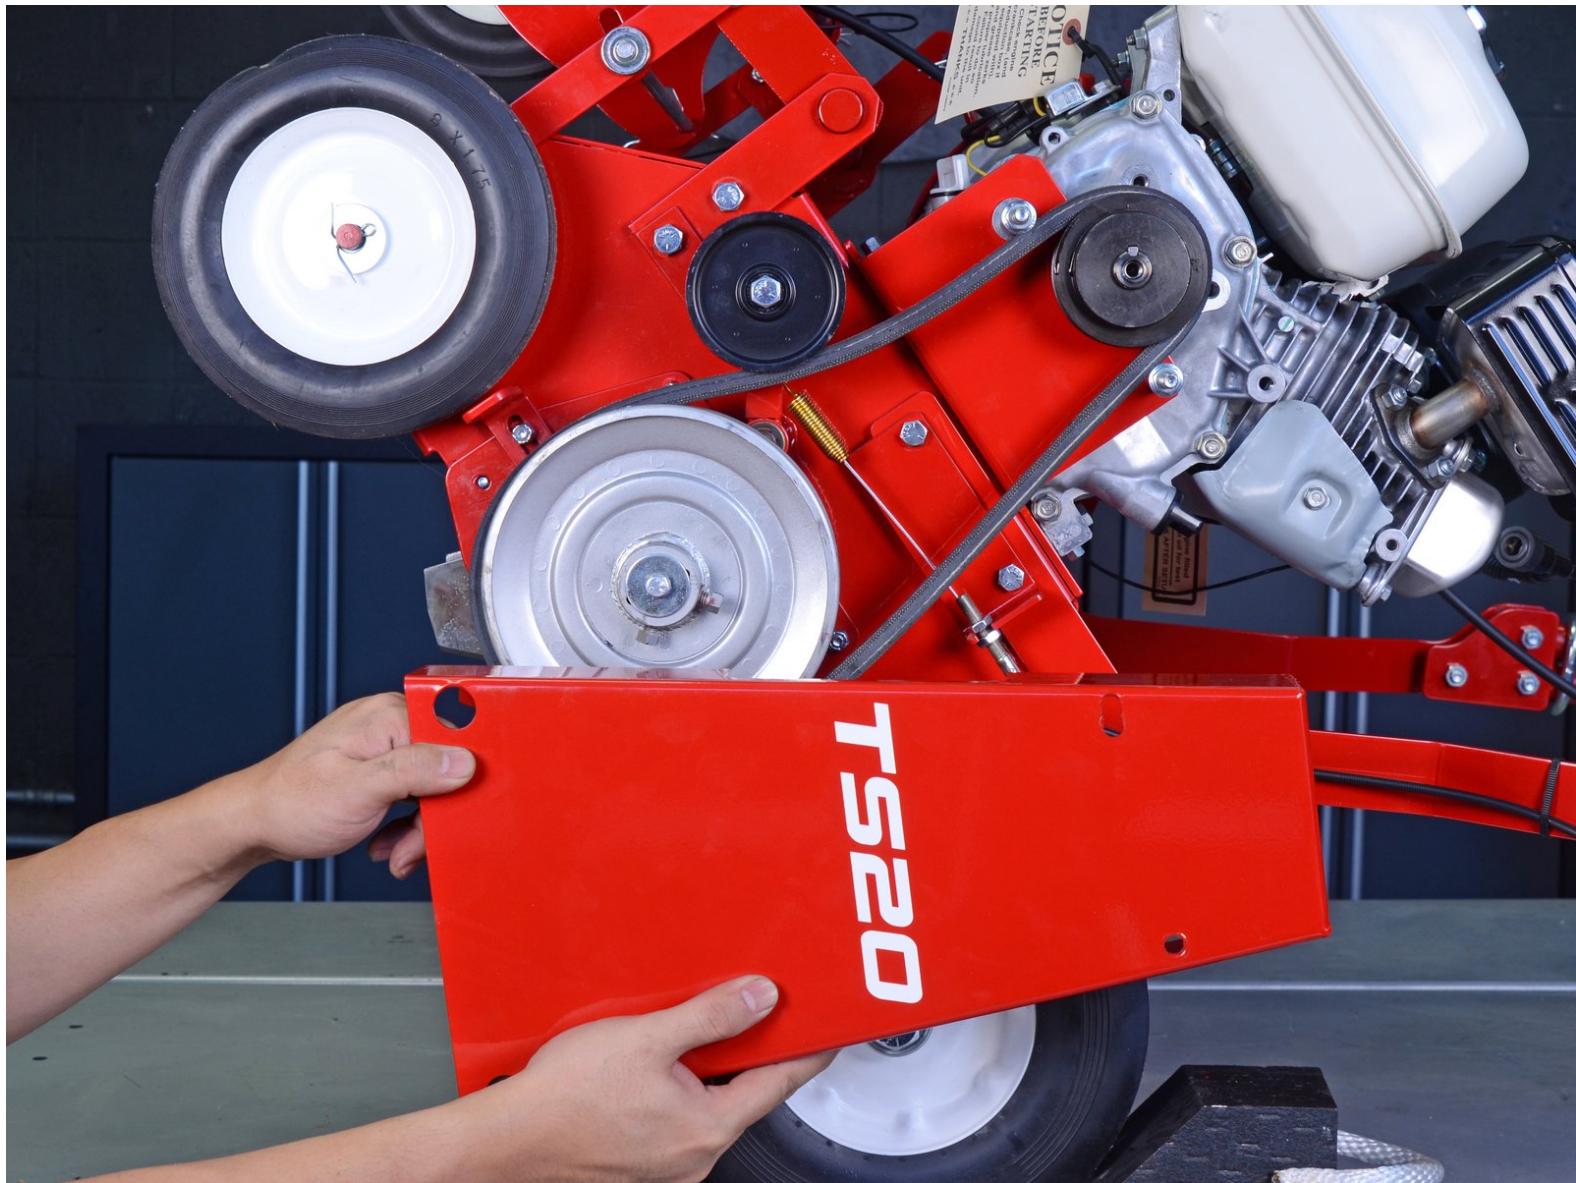

INTRODUCTION

Follow this guide to remove the belt guide in order to replace it, or to access the belt and pulley.


TOOLS:

- [Wheel Chocks](#) (1)
- [1/2" Socket](#) (1)
- [7/16" Socket](#) (1)
- [3/8-Inch Drive Extension Bar](#) (1)
- [Socket Wrench](#) (1)
- [1/2" Wrench](#) (1)
- [7/16" Wrench](#) (1)

PARTS:

- [Classen GUARD, BELT C400032](#) (1)

Step 1 — Safety precautions

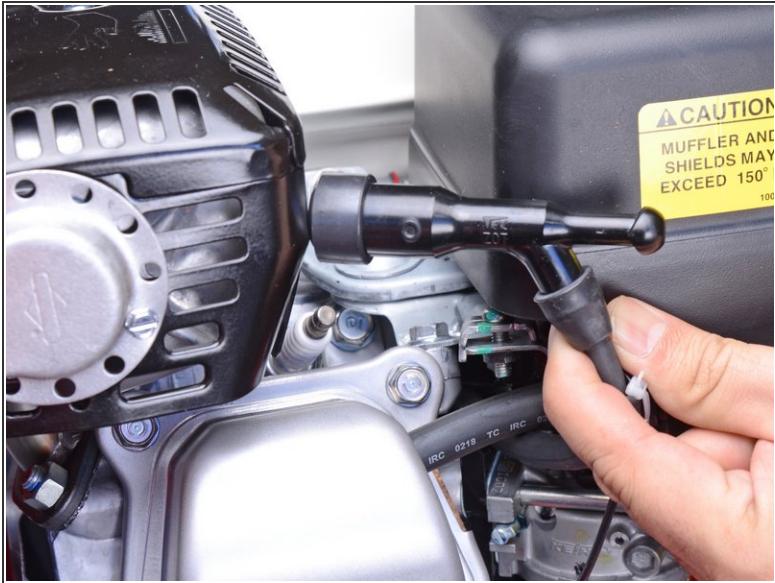

! Before you begin, ensure that the machine is powered down and cool to the touch.

- Disconnect the spark plug to prevent the engine from accidentally starting up during service:
 - Grab the plastic housing at the end of the spark plug wire.
 - Pull firmly to disconnect the wire from the spark plug.

Step 2



- To prevent the over seeder from rolling during service, place wheel chocks behind a rear wheel.

Step 3 — Tilt the over seeder



- Push down on the main handle to tilt the over seeder back on its rear wheels.
- Place some weights on the handle, or tie the handle down, to prevent the machine from falling forward.

Step 4



- Place a wheel chock in front of a rear tire to keep the machine in place.

Step 5 — Unscrew the belt guard



- Remove the four lock nuts securing the belt guard:
 - Two 1/2" lock nuts
 - Two 7/16" lock nuts

(i) These lock nuts are recessed and require a socket extension to access.

(i) Use box wrenches to hold the corresponding bolts in place as you loosen and remove the nuts.

Step 6 — Remove the belt guard



- Remove the belt guard.

To reassemble your device, follow these instructions in reverse order.