



# ClickN Kids Tablet Battery Replacement

This is a guide for replacing the battery in the device


Written By: Kevin Finney



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)

## Step 1 — Battery

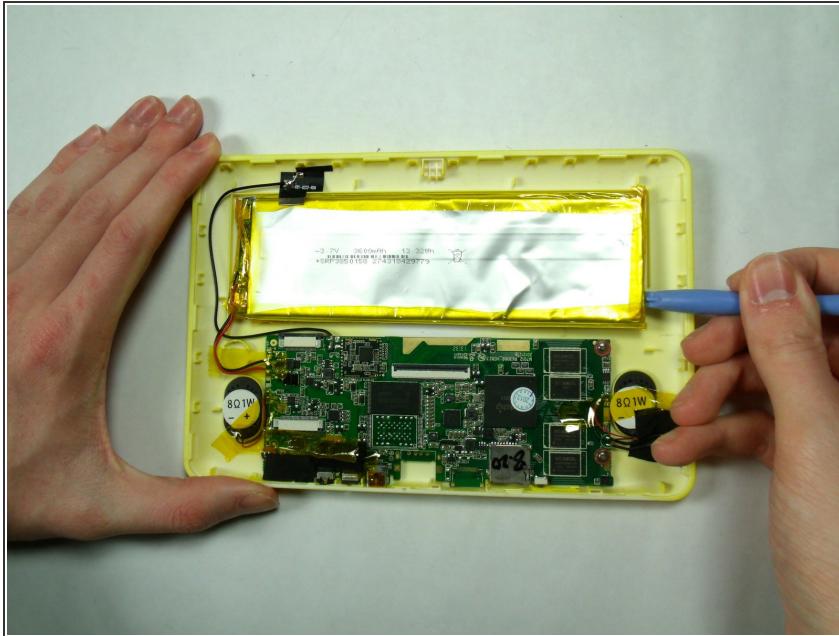

- Follow the [camera replacement guide](#) to access the battery.

## Step 2

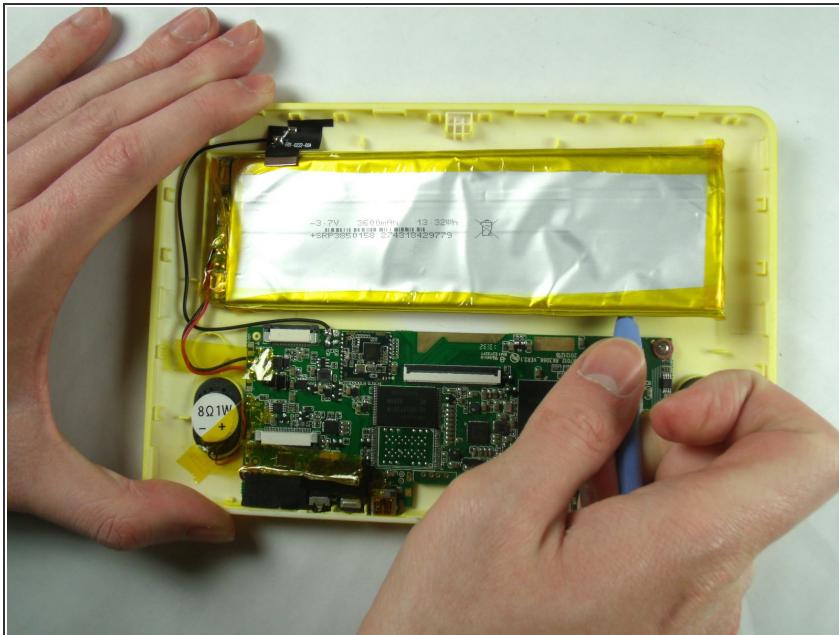


- The battery is connected to the back side by a strong adhesive.
- The battery may bend during this process.
- ⚠ Be careful not to damage the wires or the black tab attached to the battery.
- ⚠ Be careful not to allow the battery to bend any more than necessary. Battery acid leakage is possible.
- Pry the battery off the back side with a plastic opening tool.

## Step 3



- Pull the tape off the side with the wires and circuit piece.

## Step 4

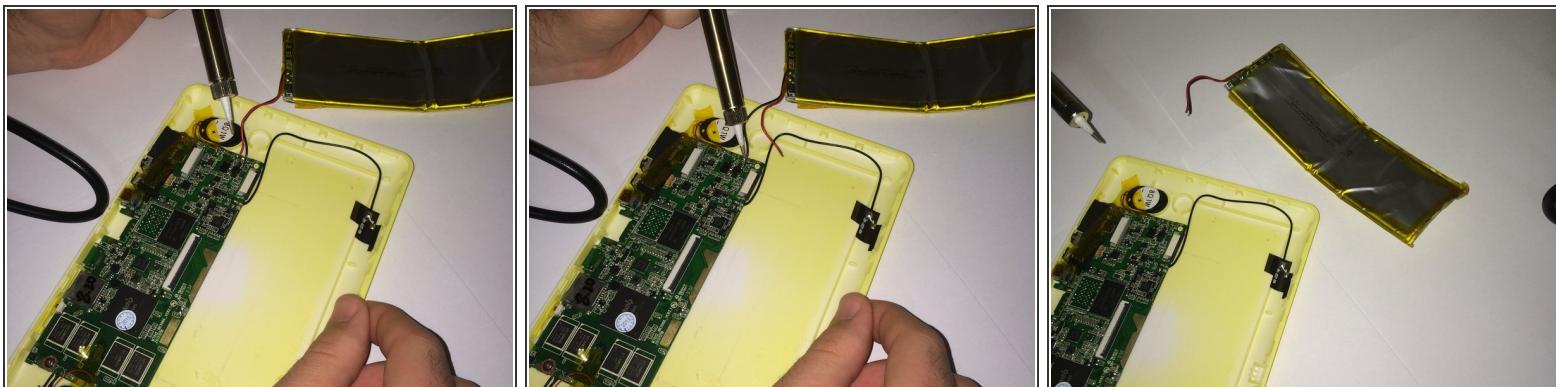

*(i)* Have someone who is skilled in soldering to perform this step.

**⚠** Be careful not to destroy the motherboard or other parts of device.

- Desolder the wires connecting the battery to the motherboard from the contact points on the motherboard.

To reassemble your device, follow these instructions in reverse order.