



# Cruiser Bike Changing Rear Wheel Replacement

Instructions on how to remove and replace the rear tire of a beach cruiser.


Written By: Erin Heimburge



 **TOOLS:**


- 10mm Wrench (1)
- Phillips #1 Screwdriver (1)
- 15mm Socket (1)
- Socket Wrench (1)

## Step 1 — Changing Rear Wheel

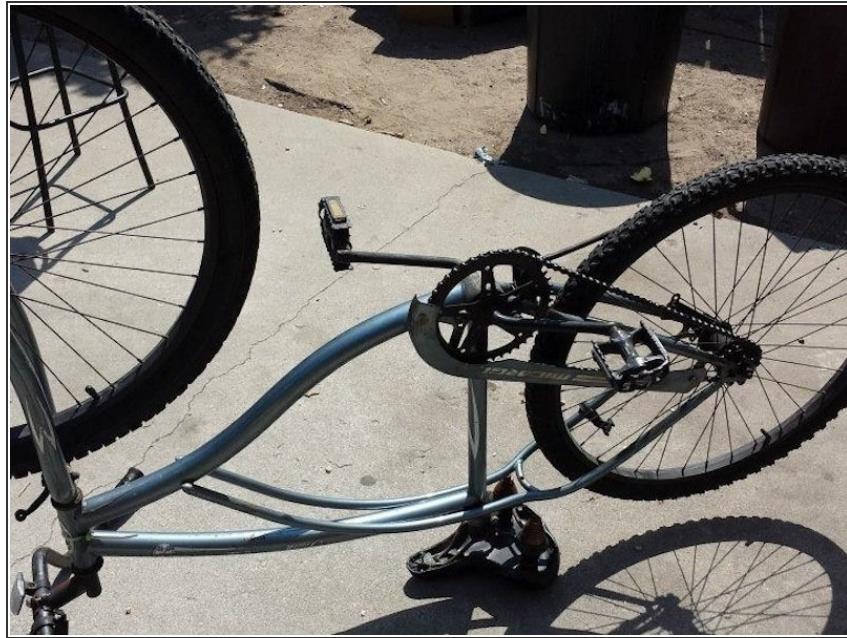

- Flip your bike so the seat and handlebars are on the ground.

## Step 2

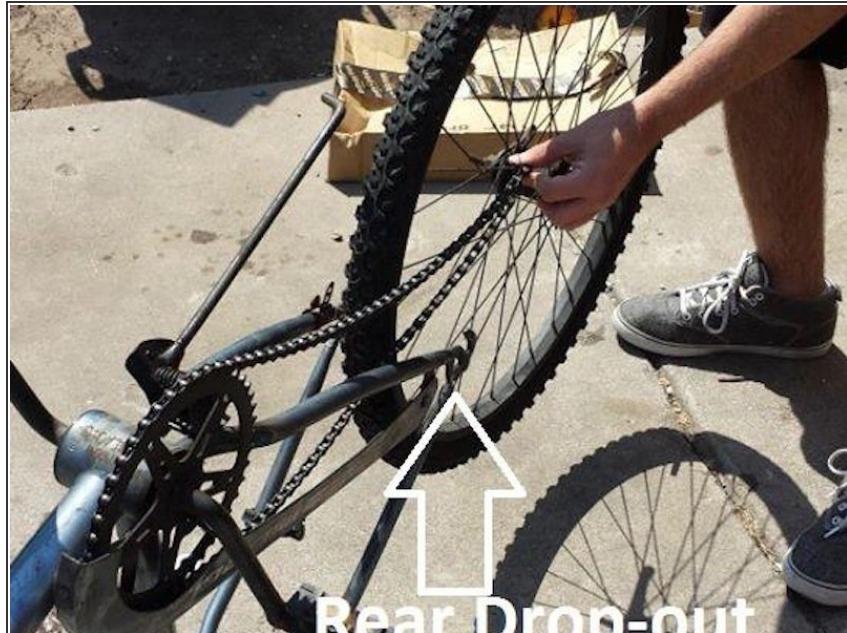

- Slip the chain onto the crank and rear cog. Then insert wheel into rear drop-outs.
- Make sure that the chain is on the correct side of the wheel

## Step 3



- Tighten brake strap using screwdriver and 10mm socket wrench. Hold the nut on the inside (near the spokes) with wrench as you tighten the screw with the screwdriver.

## Step 4



- Center the wheel and pull back to tighten the chain

## Step 5



- With wheel pulled back, tighten the two axle nuts using the 15mm socket wrench. Tighten the non-drive side (side without the chain) first.
- Wheel will angle as you tighten. Keep it centered with your hand as you finish tightening both axle nuts.

To reassemble your device, follow these instructions in reverse order.