



De' Longhi CTOV 2103- AZ

De' Longhi Toaster opened. UNPLUG THE POWER !!!

Written By: Schwarzstein




INTRODUCTION

I show how it is opened.

TOOLS:

- **T10 Torx Screwdriver** (1)
- **Multimeter** (1)

Step 1 — Pull the lever

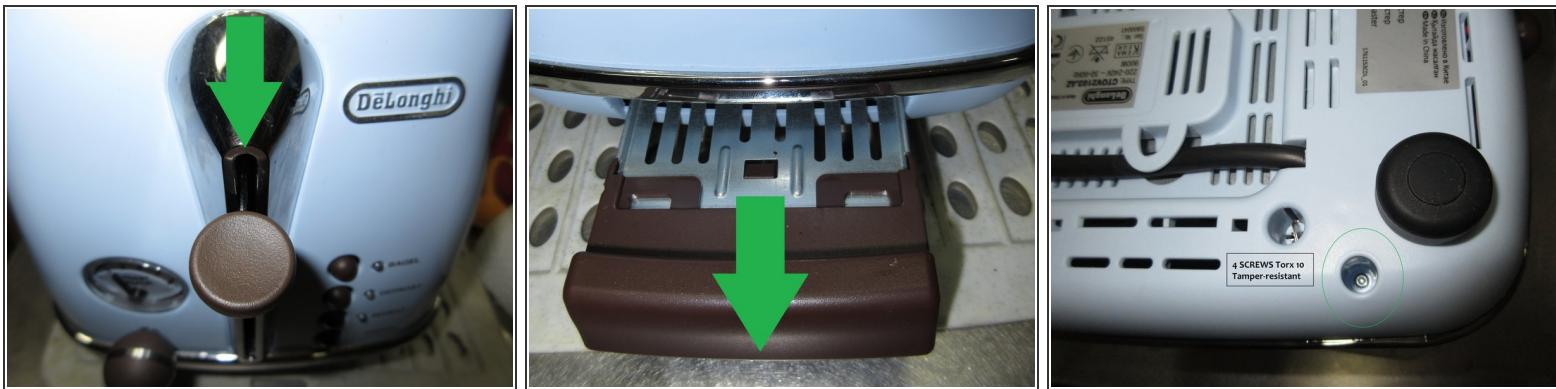

- First unplug the cable. ...Pull off the lever, it is snapped in.
- Pull out the drawer.
- Now clean it with a vacuum.
- On the underside are 4 screws Torx 10 resistant visible - in each corner one.

Step 2 — Screw




- Detail of the screw

Step 3 — Housing chrome plastic ring





- here you have two pictures of the housing and the chrome plastic frame.

Step 4 — Lever

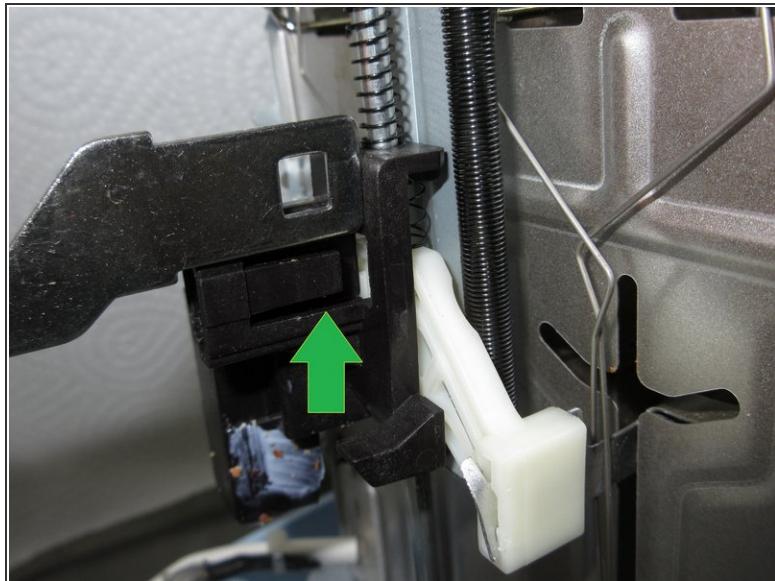




- Here you have details of the lever and how it is snapped in the mechanic.
- This shows you how to unlock it when you dismantle the housing. Good luck. ;)

Step 5 — Tempeaturesensor

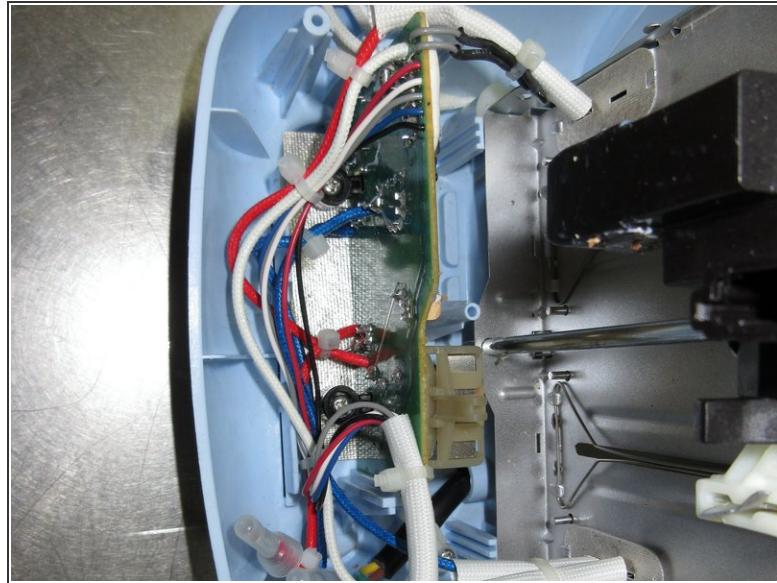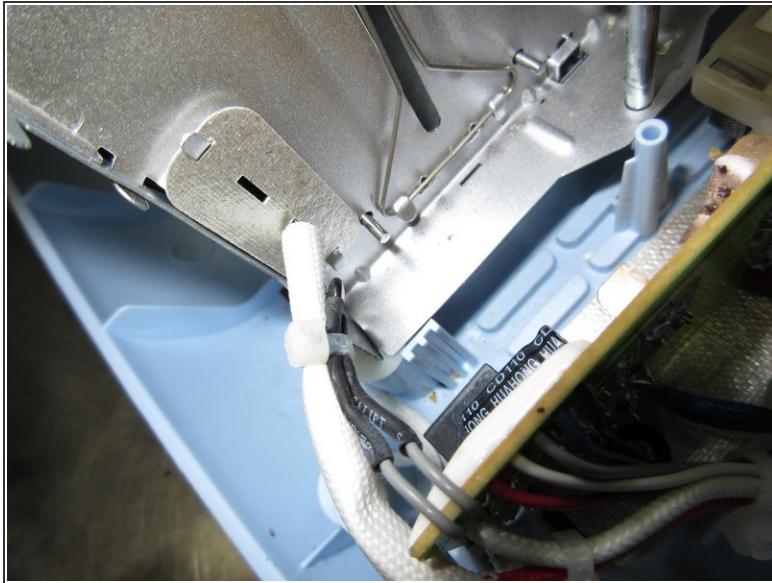

- Detail of the Sensor: It is the little black pearl at the black hoses which is strapped to the white hose.

Step 6

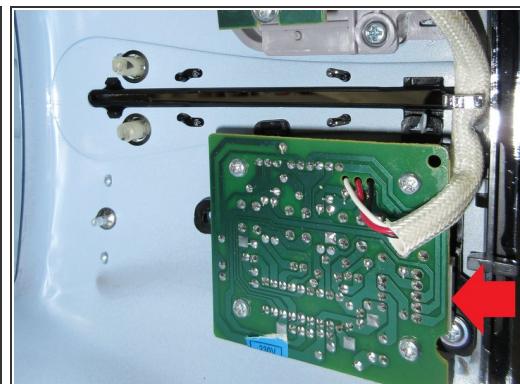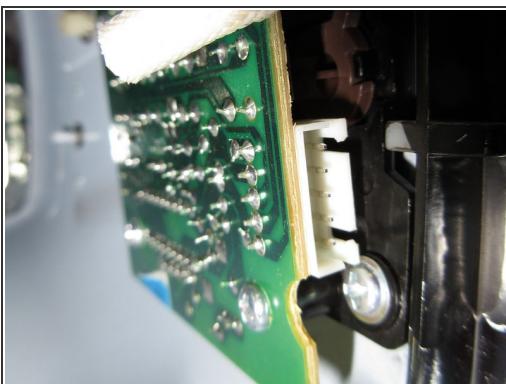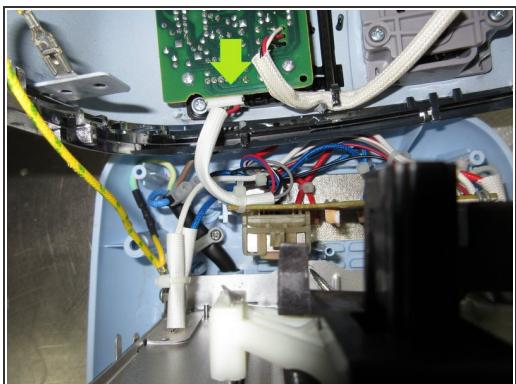


- The connector from the main platine to the switch platine.

Step 7



- Details of the plug and the bottom part after disassembly.
- Where to find the plug for the yellow ground wire i show you in the next step. :)

Step 8

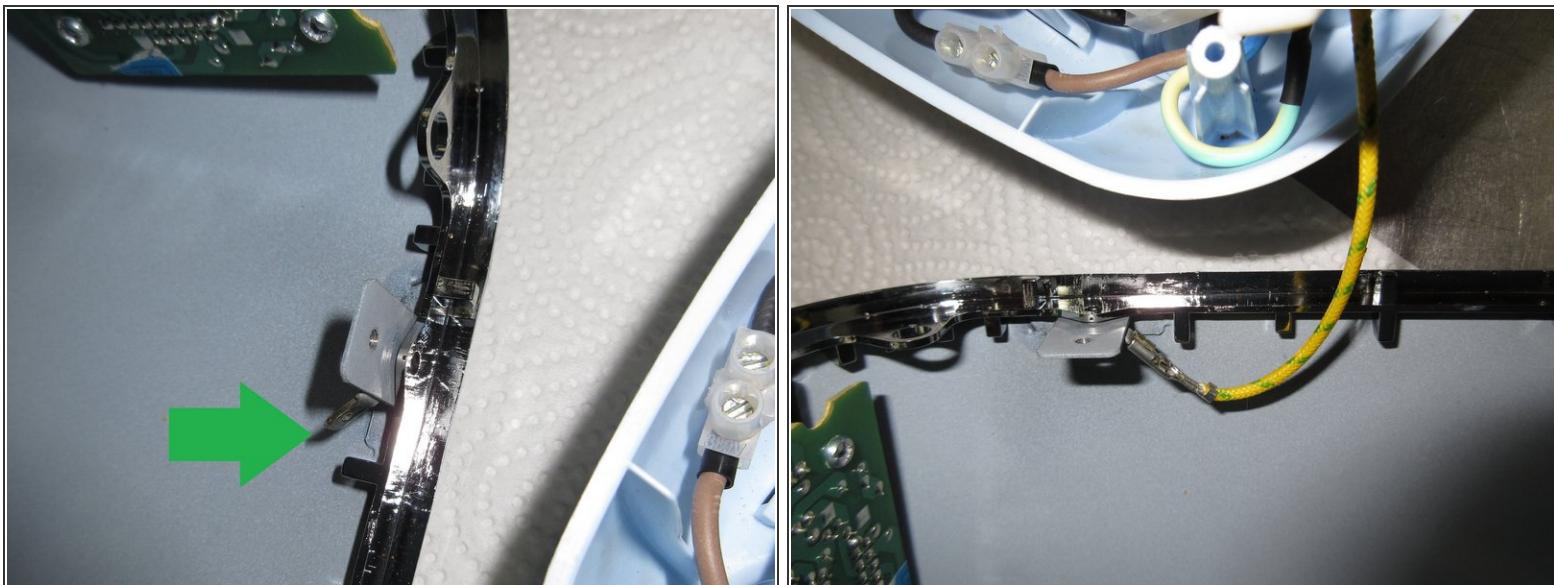

- here you can see where the yellow cable belongs to.

Step 9 — Reassembly



- Reassembly: Putt all cables at the right places, don't forget the yellow cable at the housing !!!
- Look at the picture how to fit in the metal notch in the right place !

Step 10



- Here the notch is in the right place.
- Do NOT forget to make an insulation test. Check the wiring with a multimeter.
- Made in China.
- Hope it was fun and may the pictures help you. Greets. :)

To reassemble your device, follow these instructions in reverse order.