




Dell Alienware 17 Primary Hard-Drive Replacement

Written By: Terrence15

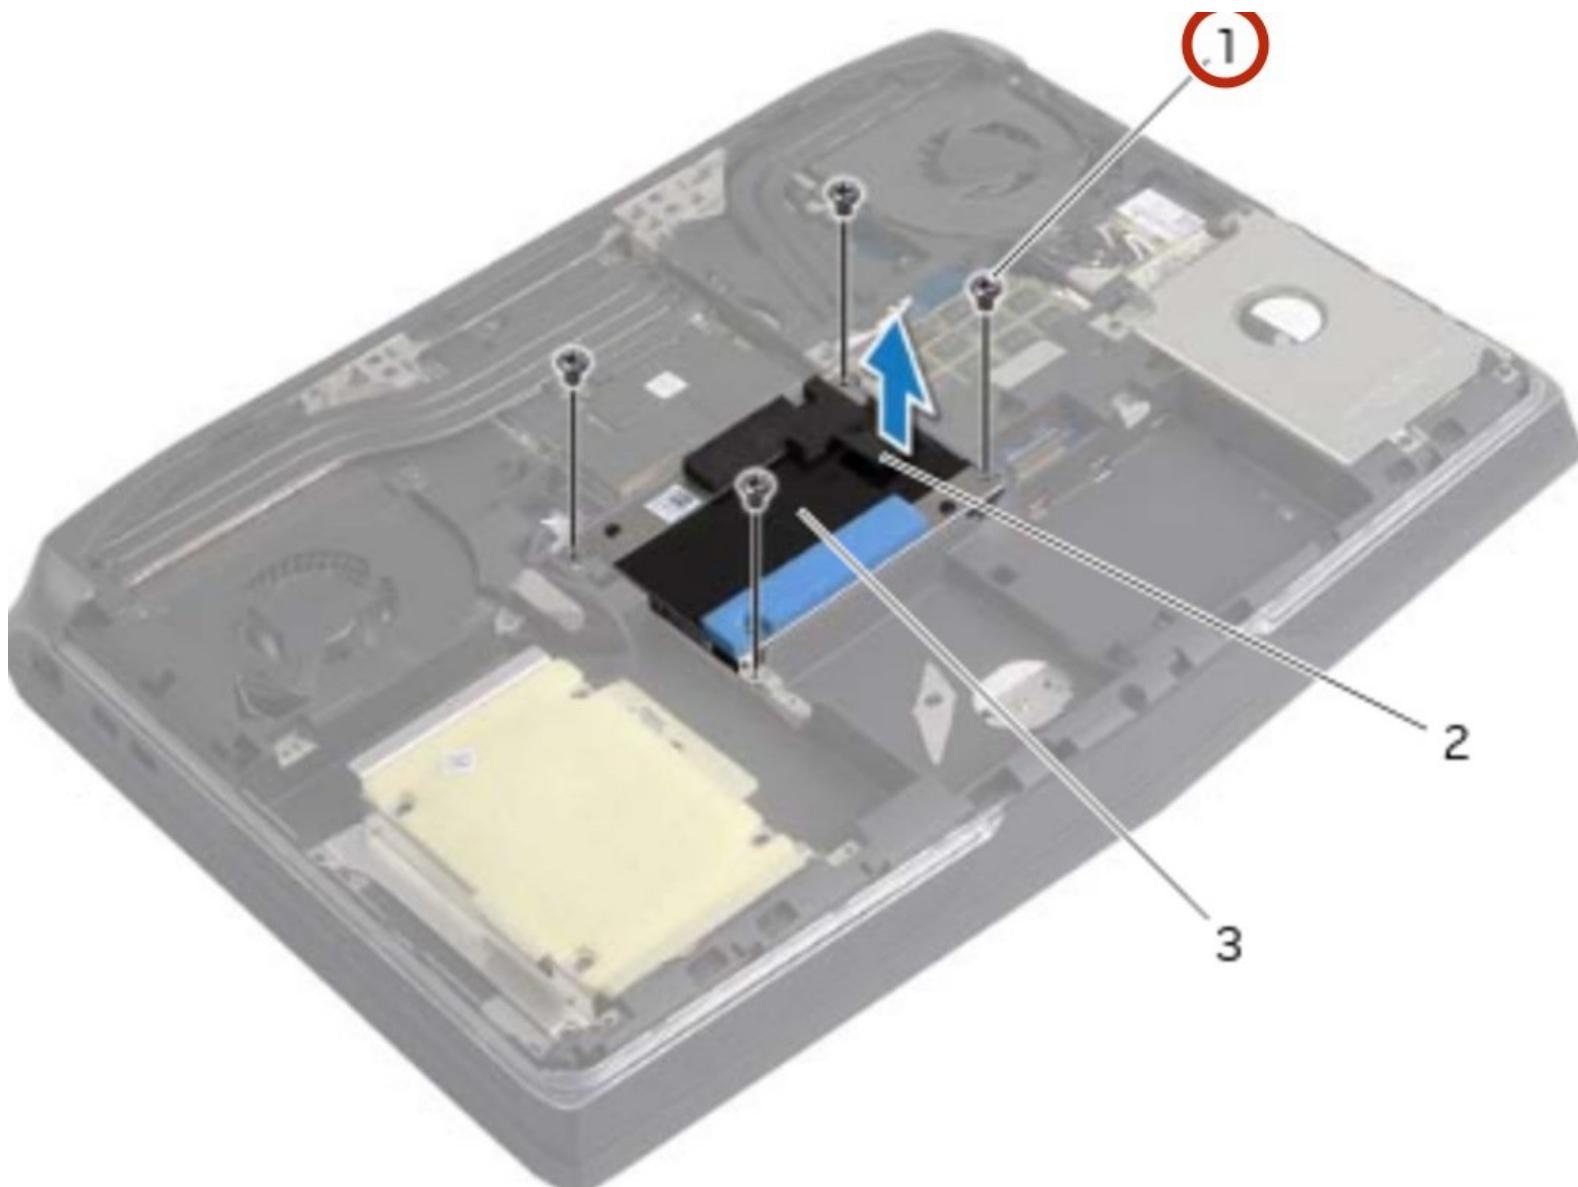


INTRODUCTION

In this guide, we will show you how to remove and replace the Primary Hard-drive.

TOOLS:

- Pro Tech Toolkit (1)

Step 1 — Remove the Screws

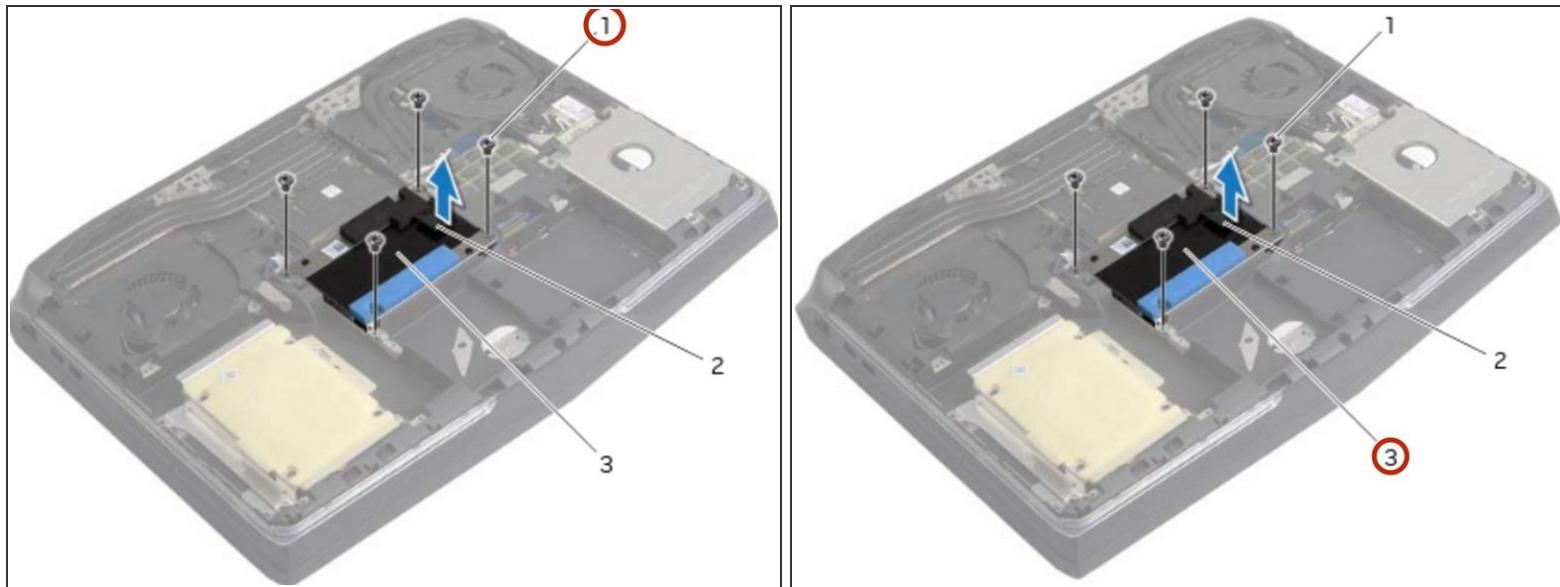


⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).

⚠ CAUTION: To avoid data loss, do not remove the hard drive while the computer is On or in Sleep state.

⚠ CAUTION: Hard drives are extremely fragile. Exercise care when handling the hard drive.


- Remove the screws that secure the hard-drive assembly to the computer base.

Step 2 — Lifting the Hard-Drive Assembly

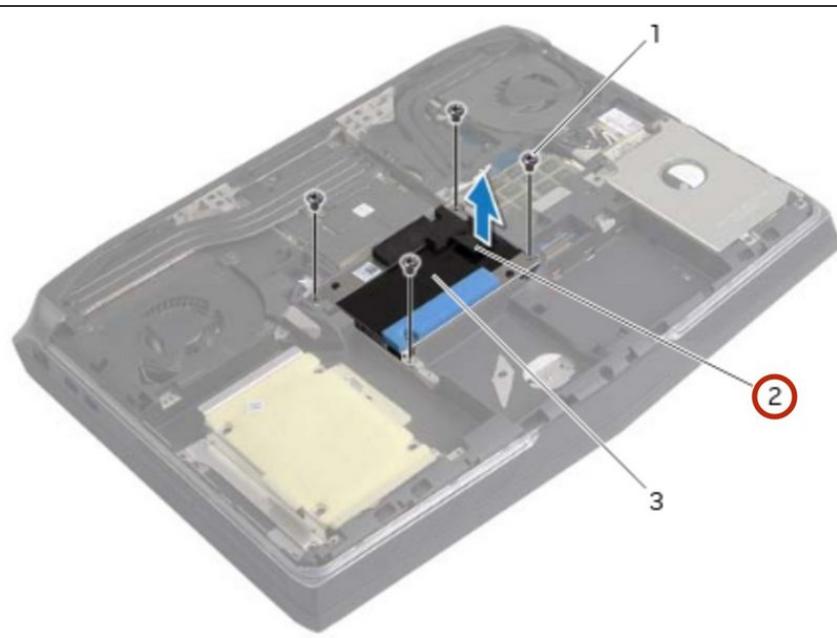


- Using the pull-tab, lift the hard-drive assembly off the computer base.

Step 3 — Disconnecting the Interposer

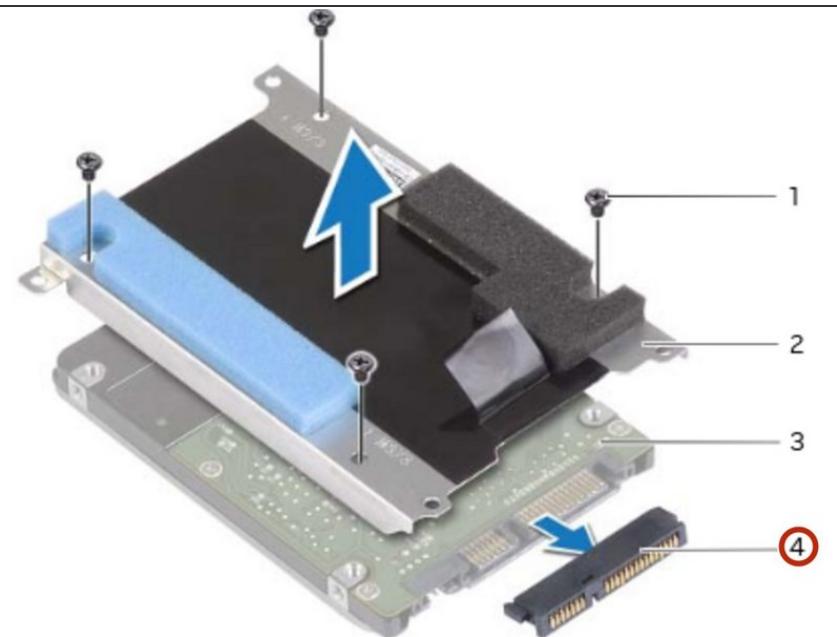



- Disconnect the interposer from the hard drive.

Step 4 — Remove the Screws

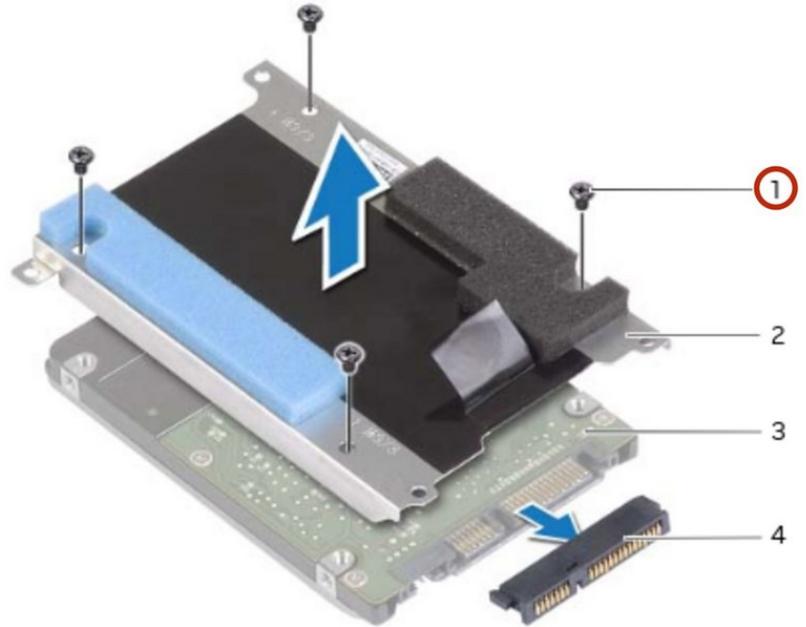


- Remove the screws that secure the hard-drive bracket to the hard drive.

Step 5 — Lifting the Hard-Drive Bracket

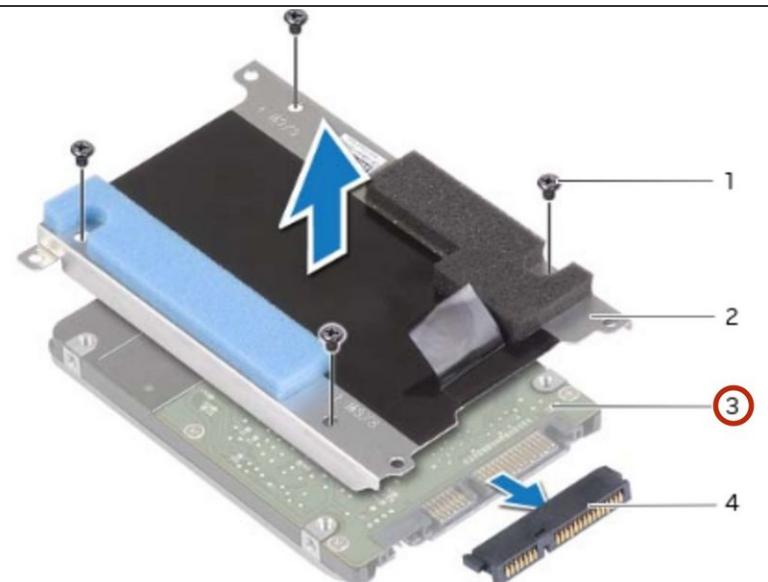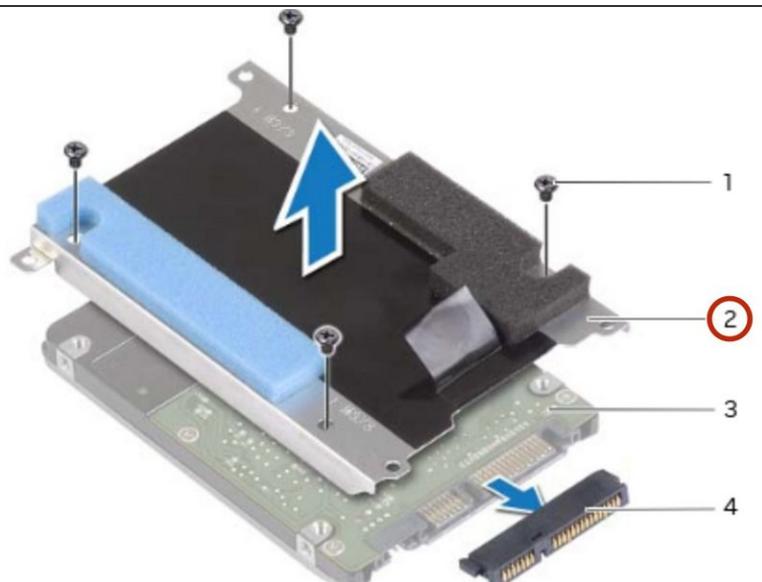


- Lift the hard-drive bracket off the hard drive.

Step 6 — Placing the Hard Drive

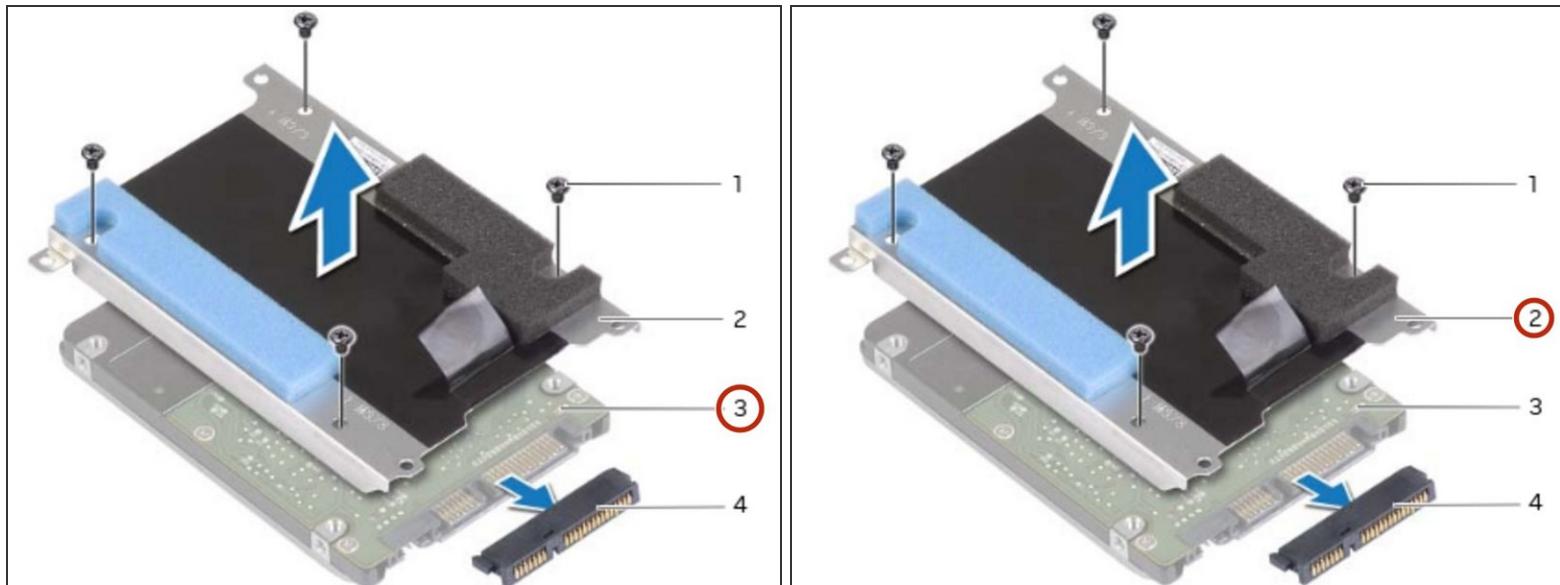


- Place the **NEW** hard drive in the hard-drive bracket.

Step 7 — Replace the Screws

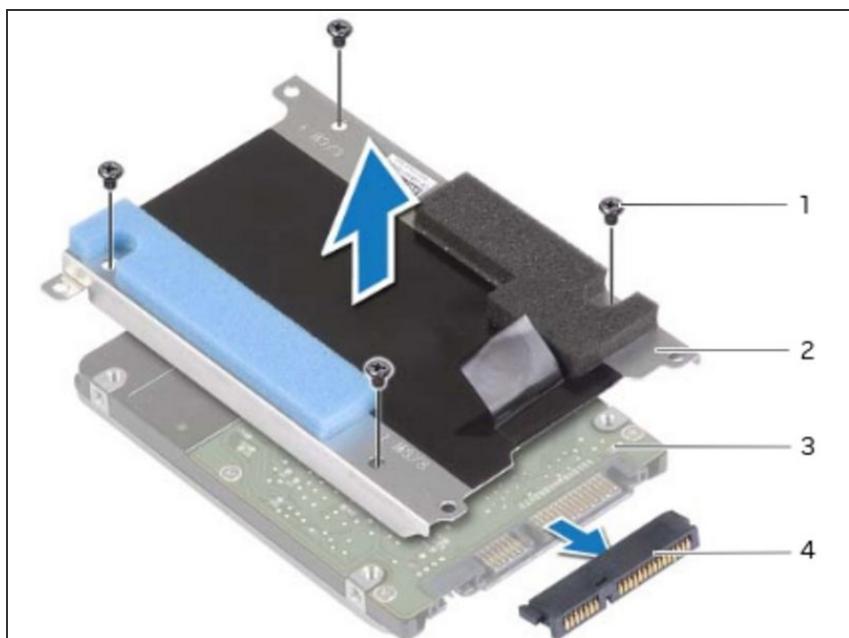


- Replace the screws that secure the hard-drive bracket to the hard drive.

Step 8 — Connecting the Interposer

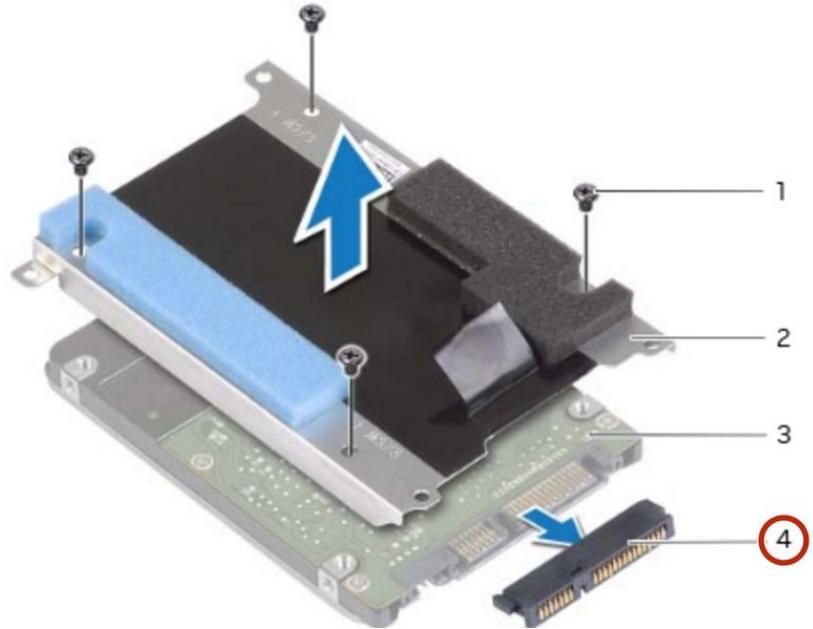


- Connect the interposer to the hard drive.

Step 9 — Align the Screw Holes

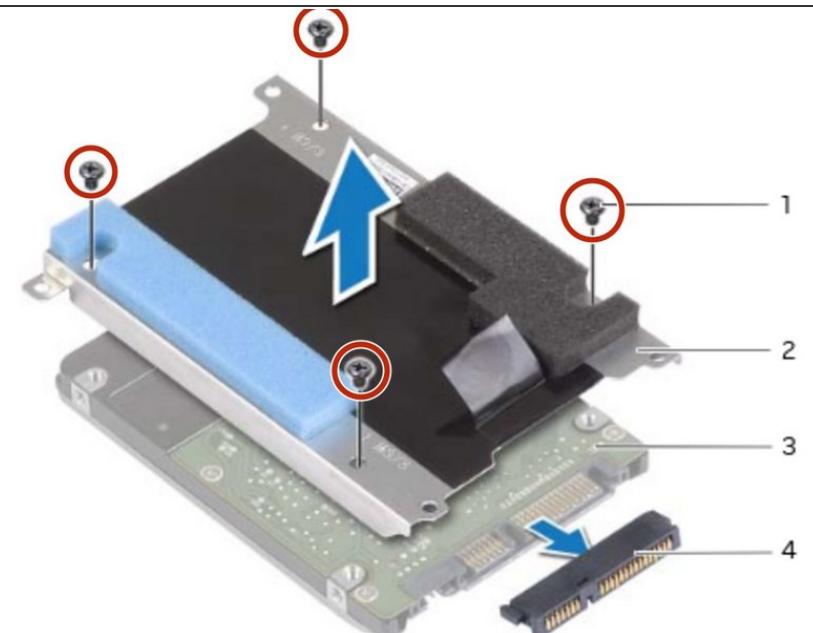


- Align the screw holes on the hard-drive bracket with the screw holes on the hard drive.

Step 10 — Connecting the Interposer

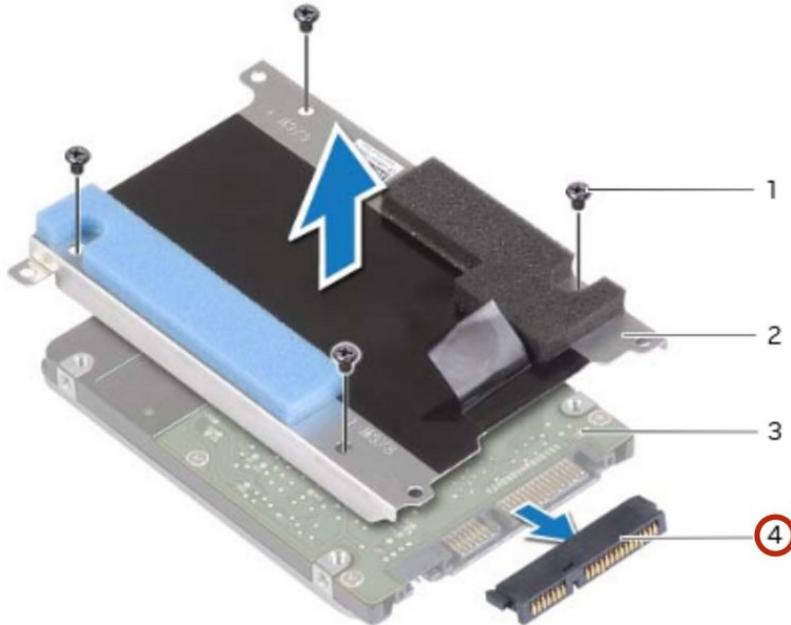


- Connect the interposer to the hard drive.

Step 11 — Placing the Hard-Drive Assembly

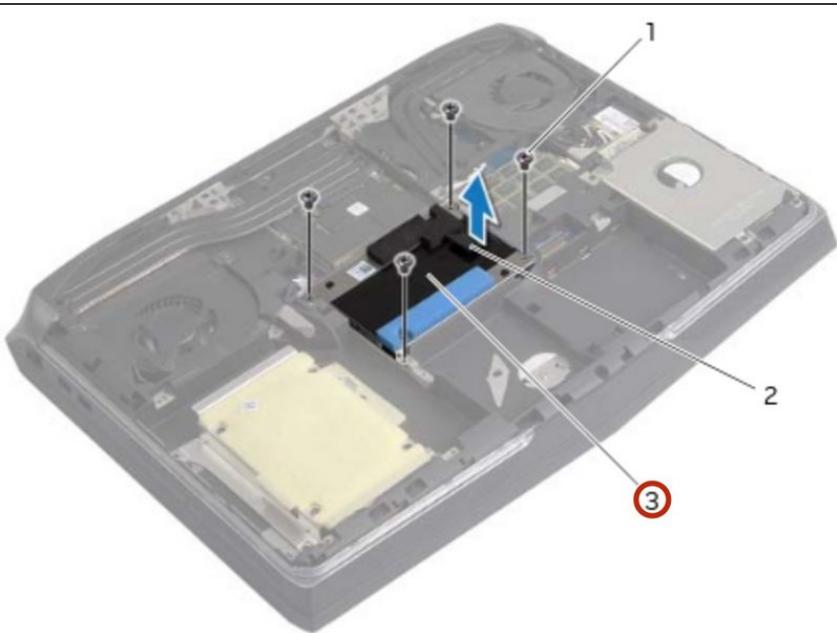


- Place the hard-drive assembly in the hard-drive bay.

Step 12 — Aligning the Screw Holes

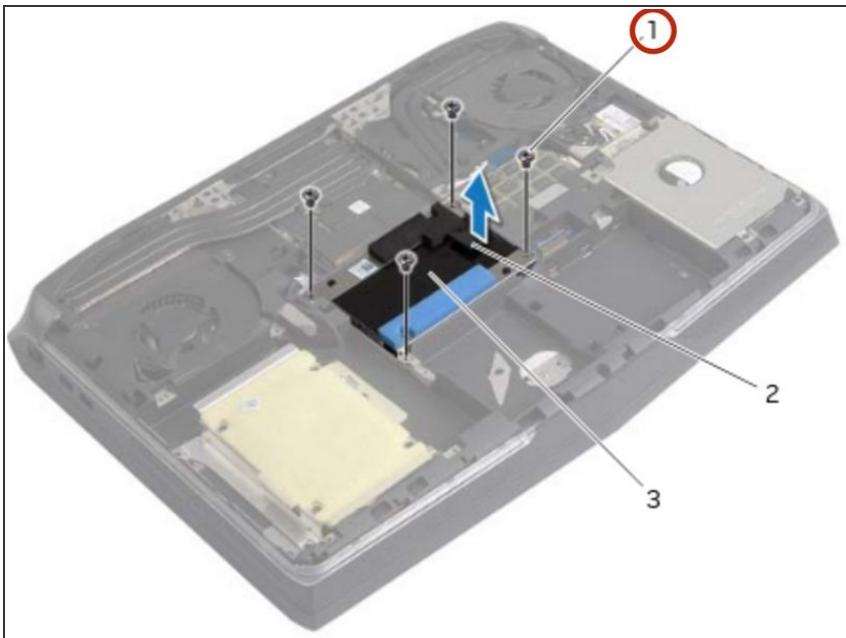

- Align the screw holes on the hard-drive assembly with the screw holes on the computer base.

Step 13 — Replace the Screws

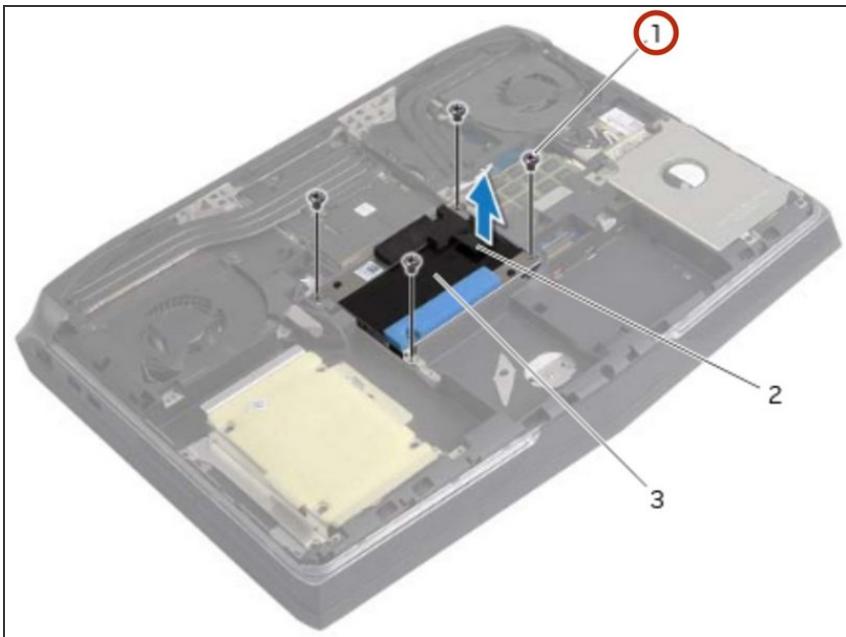

- Replace the screws that secure the hard-drive assembly to the computer base.

To reassemble your device, follow these instructions in reverse order.