




# Dell Inspiron 1122 M102z Memory Modules Replacement

Written By: Terrence15

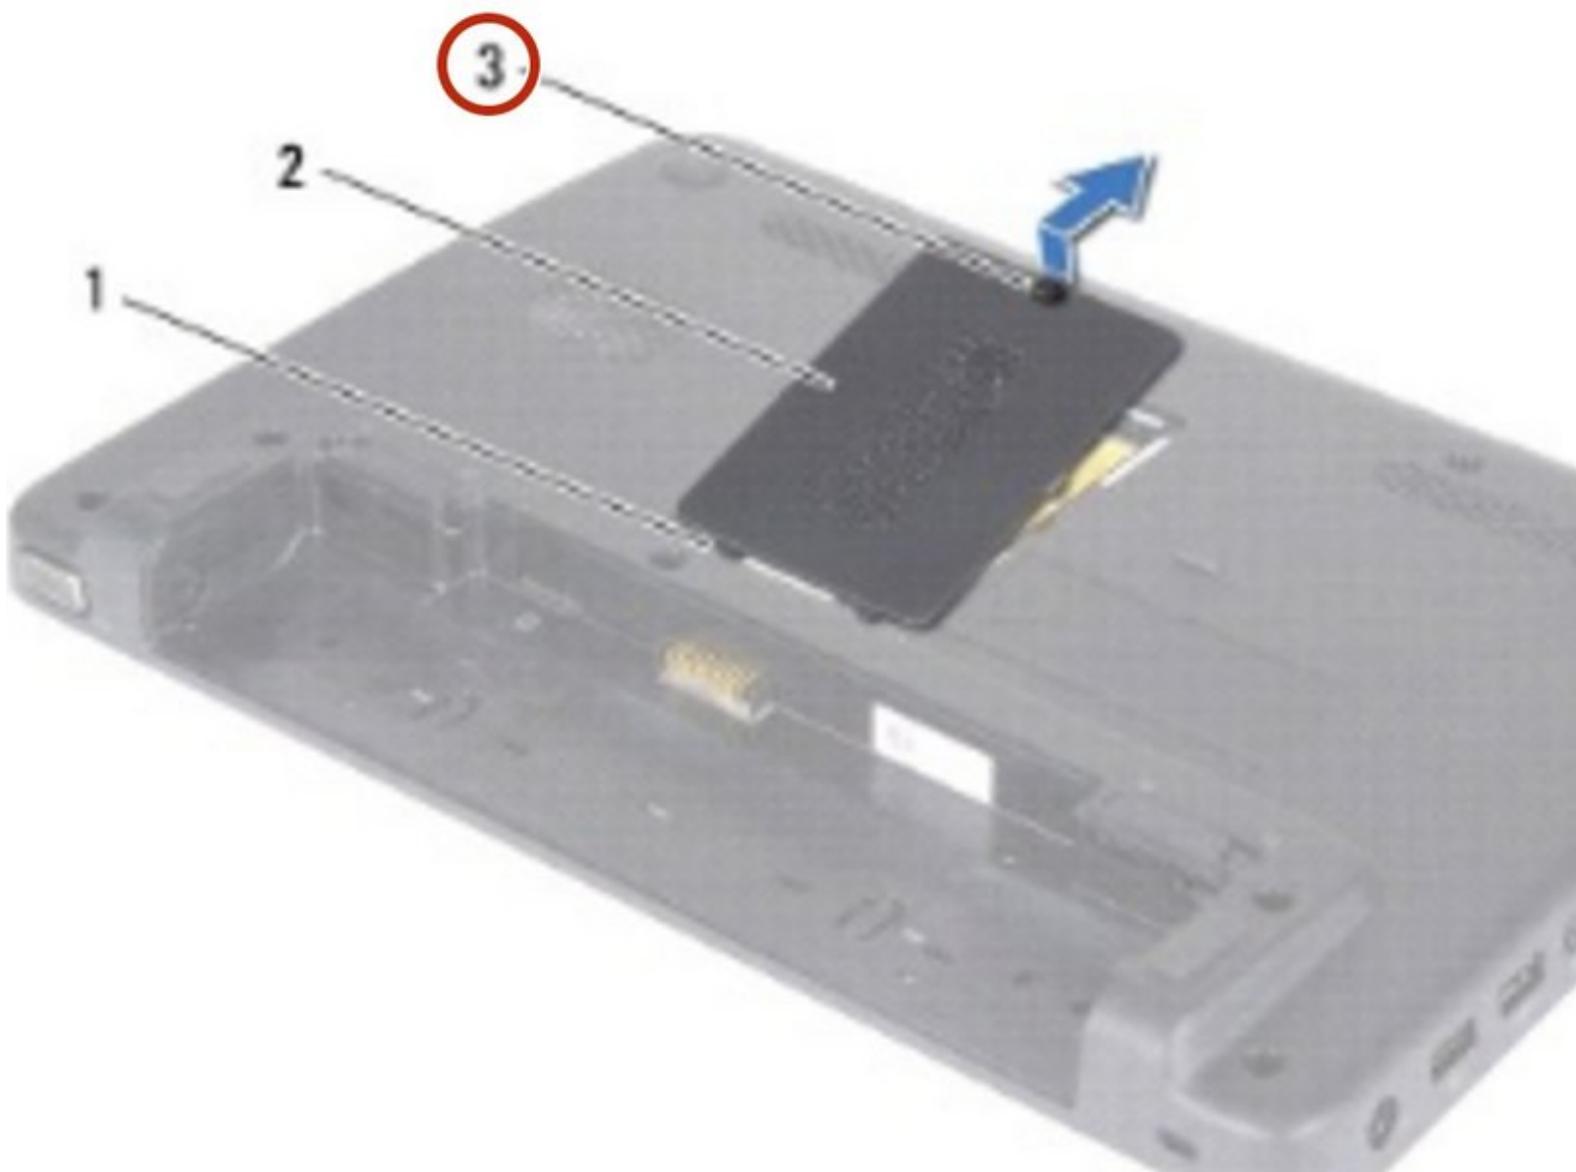


## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — Sliding the Battery

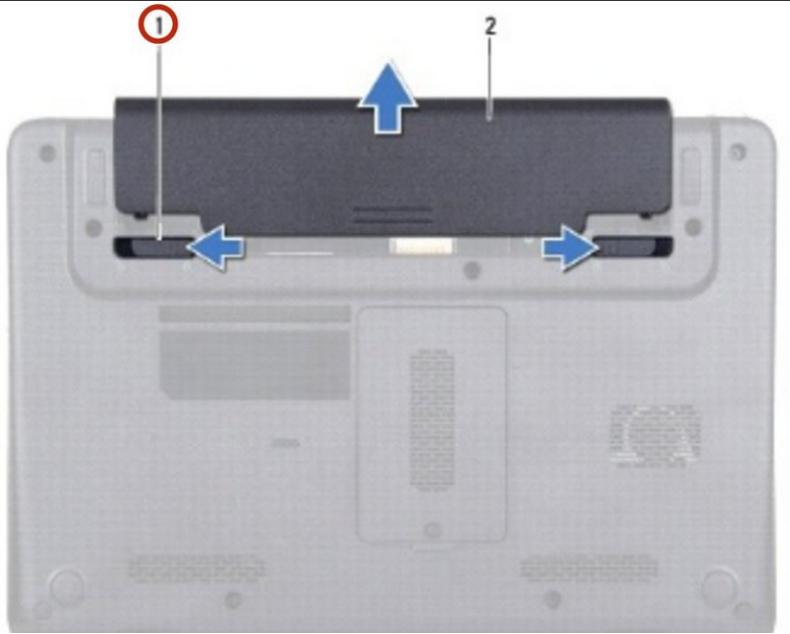


**⚠️** **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).

**⚠️** **CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).


- Slide the battery release latches to the unlock position.

## Step 2 — Sliding the Battery

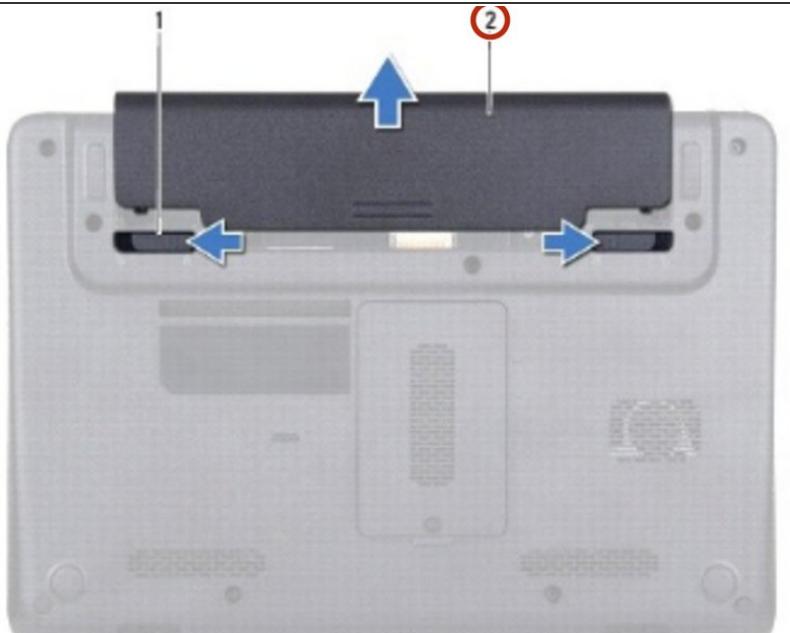


- Slide the battery out of the battery bay.

## Step 3 — Sliding the Battery

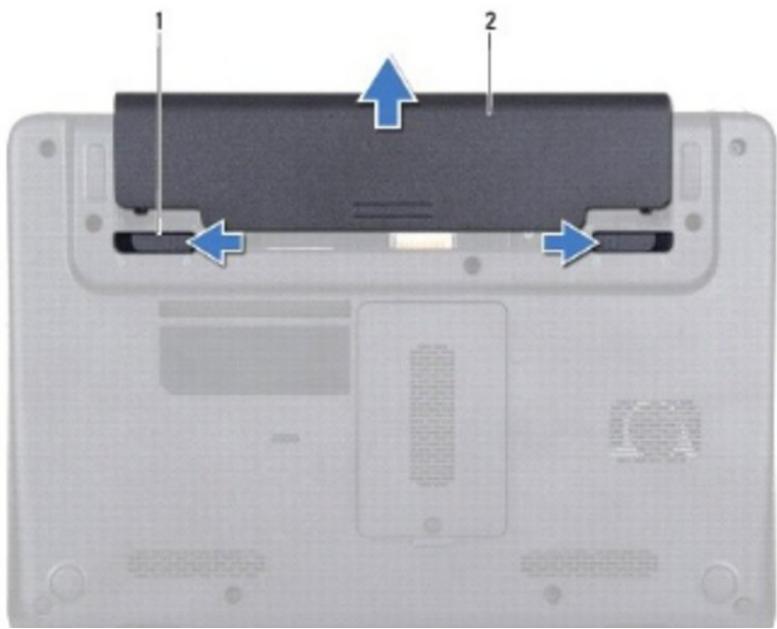

- Slide the battery into the battery bay, until it clicks into place.

## Step 4 — Loosen the Screw

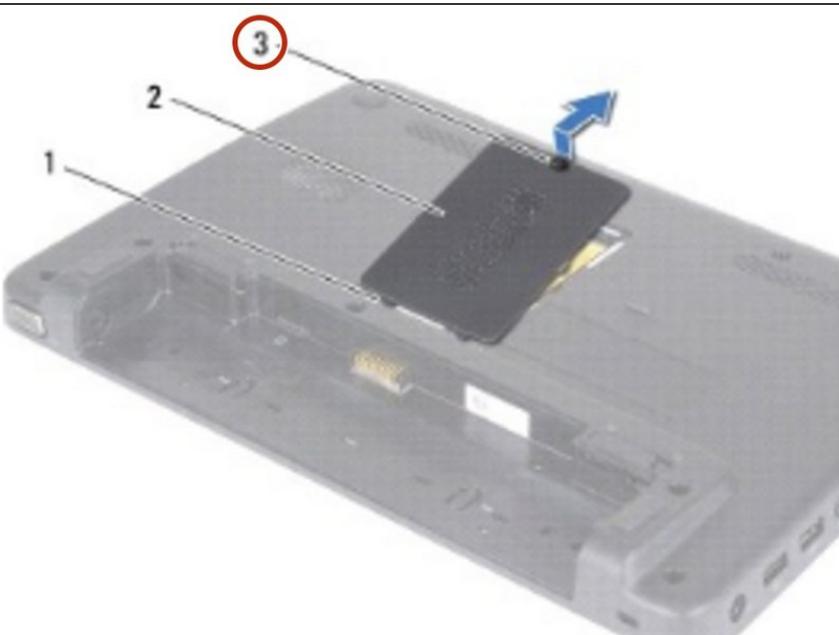


 **WARNING:** Before working inside your computer, read the safety information that shipped with your

computer. Follow the instructions in [Before You Begin](#).


- Loosen the captive screw that secures the memory-module cover to the computer base.

## Step 5 — Lifting the Memory-Module Cover

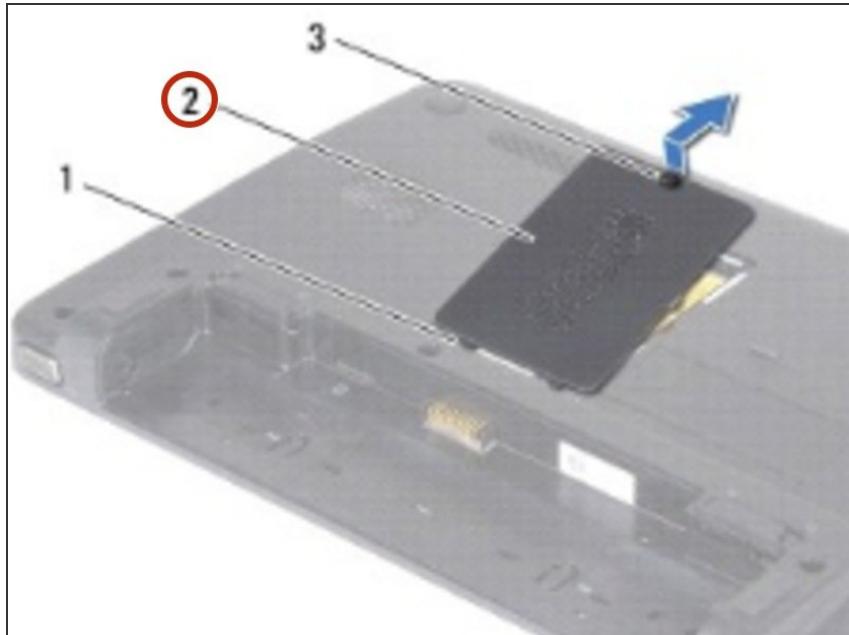

- Lift the memory-module cover off the computer base.


## Step 6 — Spread Apart the Securing Clips

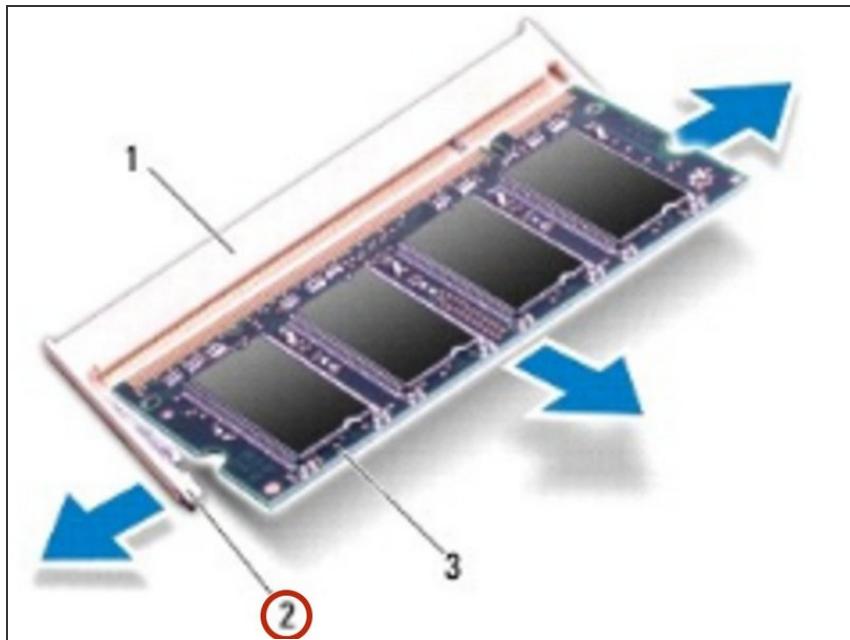

**!** CAUTION: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.

## Step 7 — Removing the Memory Module

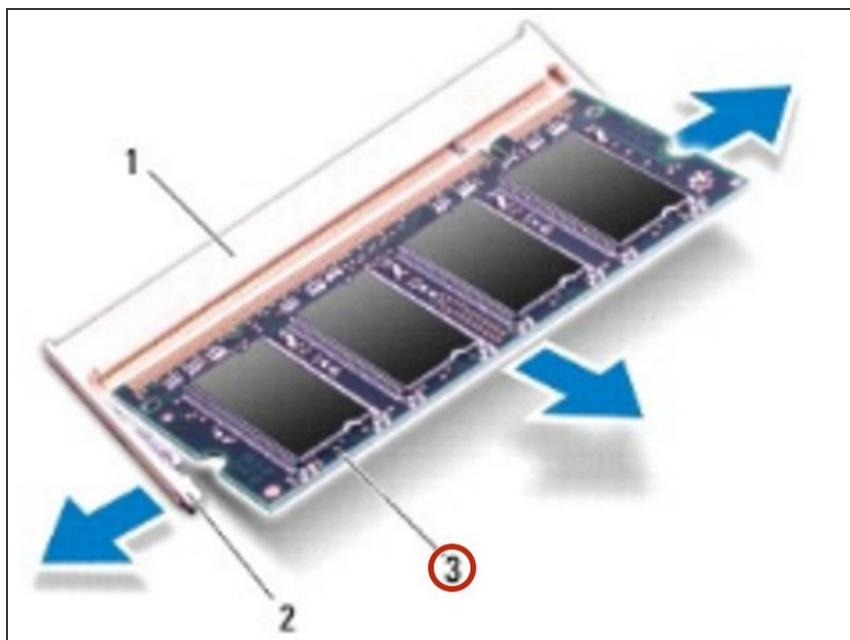

- Remove the memory module from the memory-module connector.


## Step 8 — Align the Notch

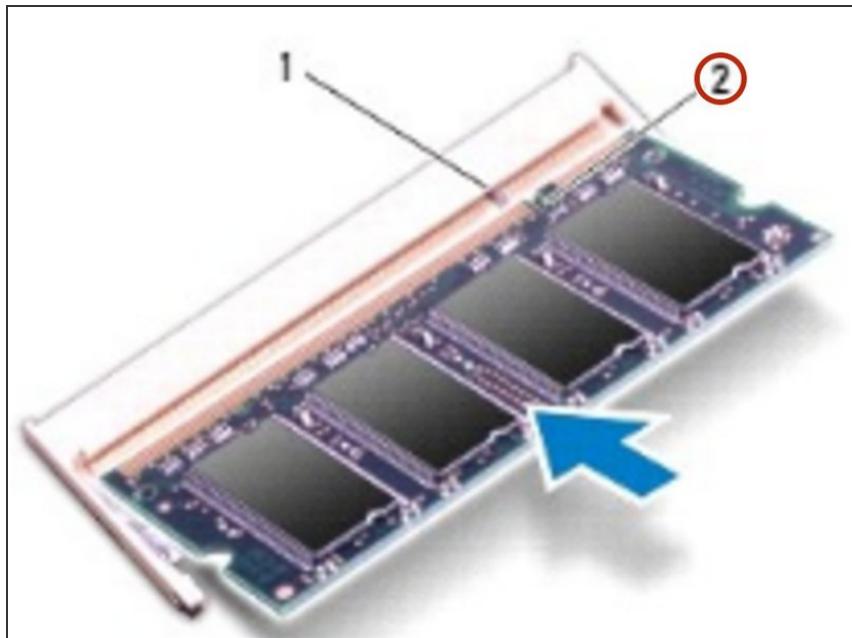

⚠ CAUTION: If you need to install memory modules in two connectors, install a memory module in the lower connector before you install a memory module in the upper connector.

- Align the notch in the **NEW** memory module with the tab in the memory-module connector.


## Step 9 — Sliding the Memory Module

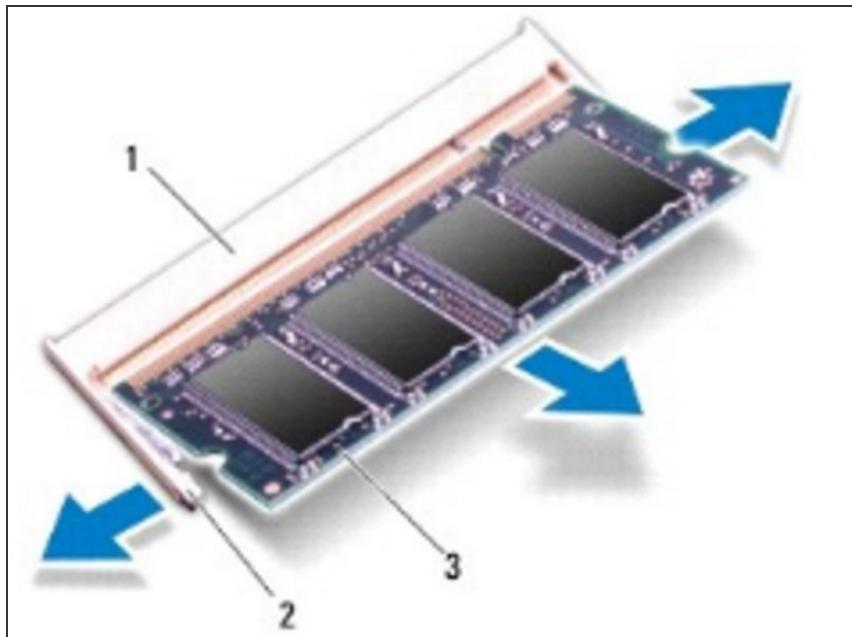

- Slide the memory module firmly into the memory-module connector at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.


ⓘ NOTE: If the memory module is not installed properly, the computer may not boot.

## Step 10 — Sliding the Tabs

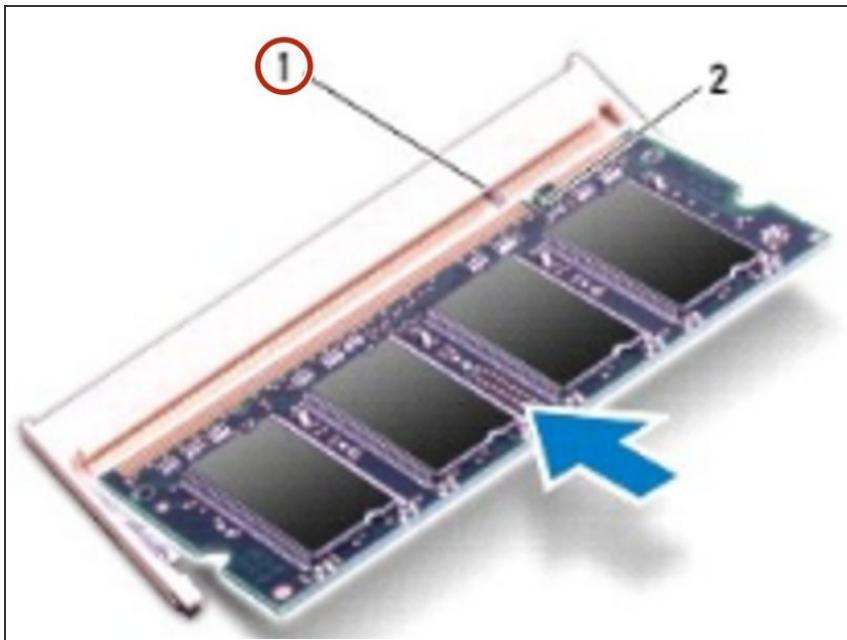

- Slide the tabs on the memory-module cover into the slots on the computer base and gently press the memory-module cover into place.

## Step 11 — Tighten the Screw

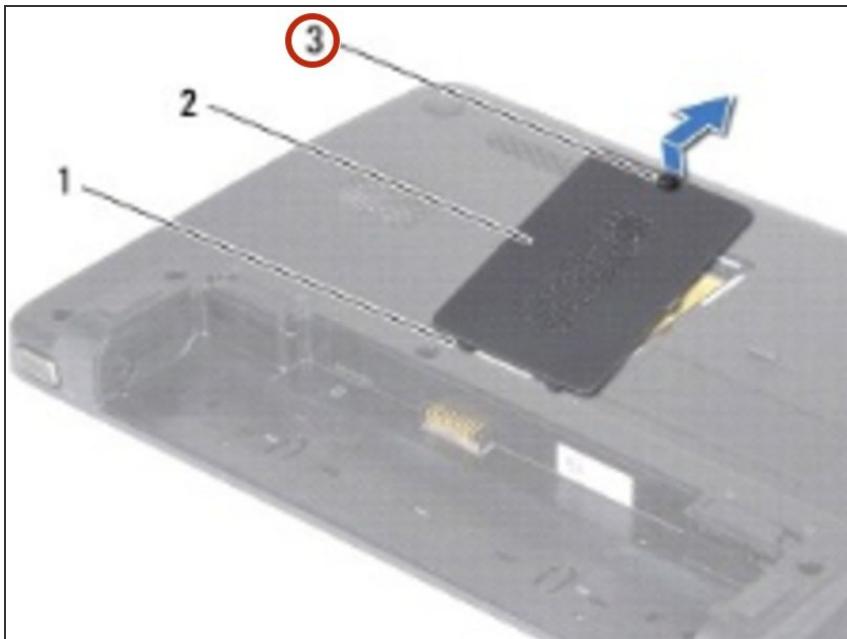

- Tighten the screw that secures the memory-module cover to the computer base.

To reassemble your device, follow these instructions in reverse order.