




Dell Inspiron 13-7373 Daughterboard Replacement

How to replace a Dell Inspiron 13-7373 daughterboard.

Written By: Kristen Gismondi

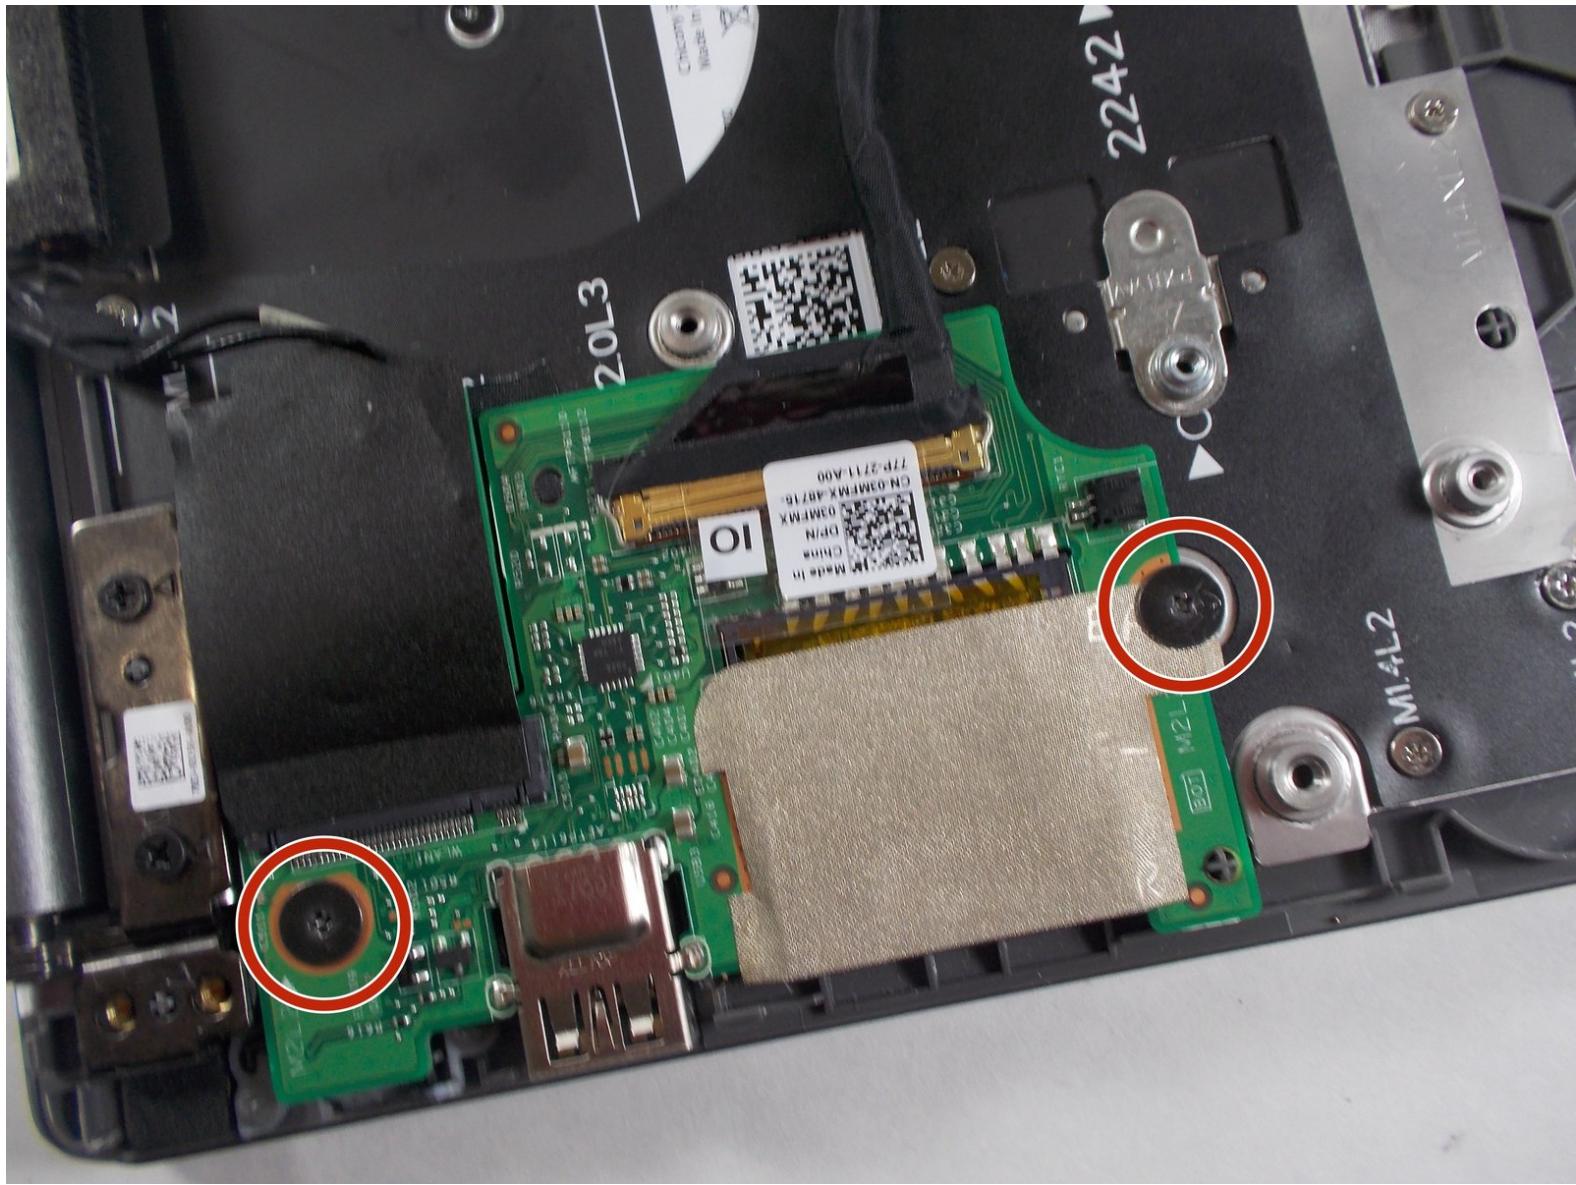

 **TOOLS:**


- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Back Cover



- Remove nine 7.5mm Phillips #00 screws from the bottom of the laptop.
- Use an opening tool to remove the bottom half of the case from the laptop.

Step 2 — Network Card

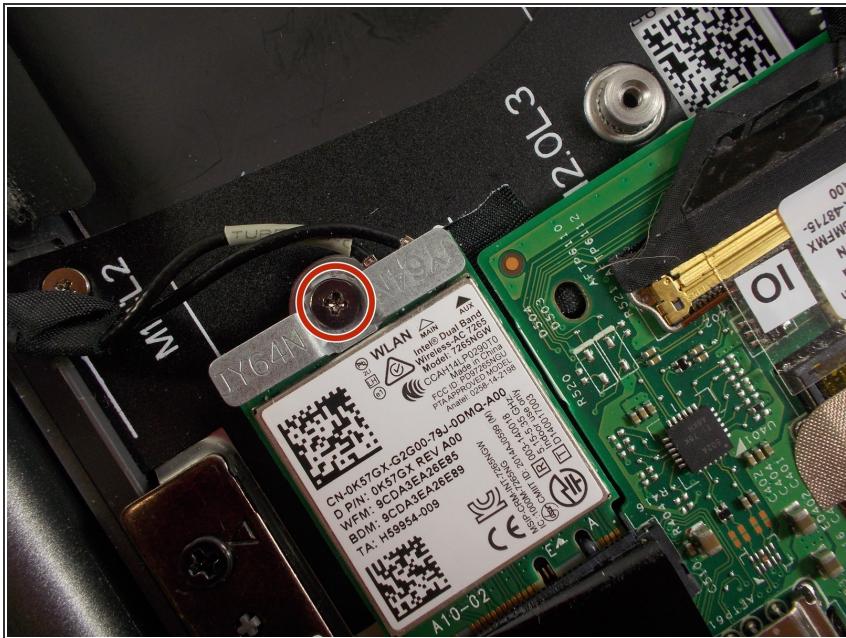


- Use the Phillips #00 screwdriver to remove the single screw holding in the network card.
- Remove the network card from the laptop.

Step 3 — Daughterboard



- Use the Phillips #00 screwdriver to remove the two 1mm screws holding in the daughterboard.
- Remove the metal piece holding in the daughterboard.
- Disconnect the two cable connectors from the daughterboard.
- If the cables are stuck, gently wiggle them until they disconnect.

Step 4

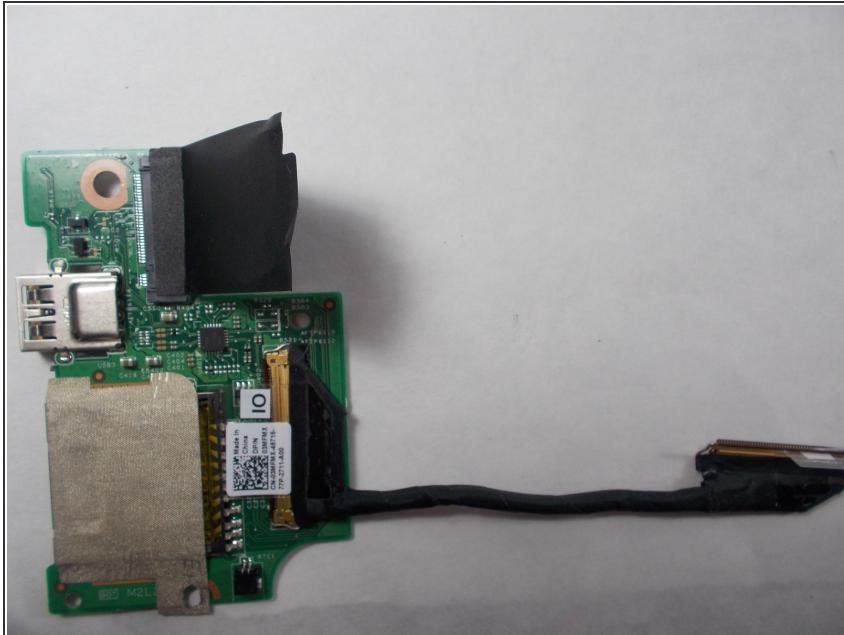

- Remove the daughterboard.

To reassemble your device, follow these instructions in reverse order.