




Dell Latitude 7480 Battery replacement

Replacement

Written By: brandon bradshaw

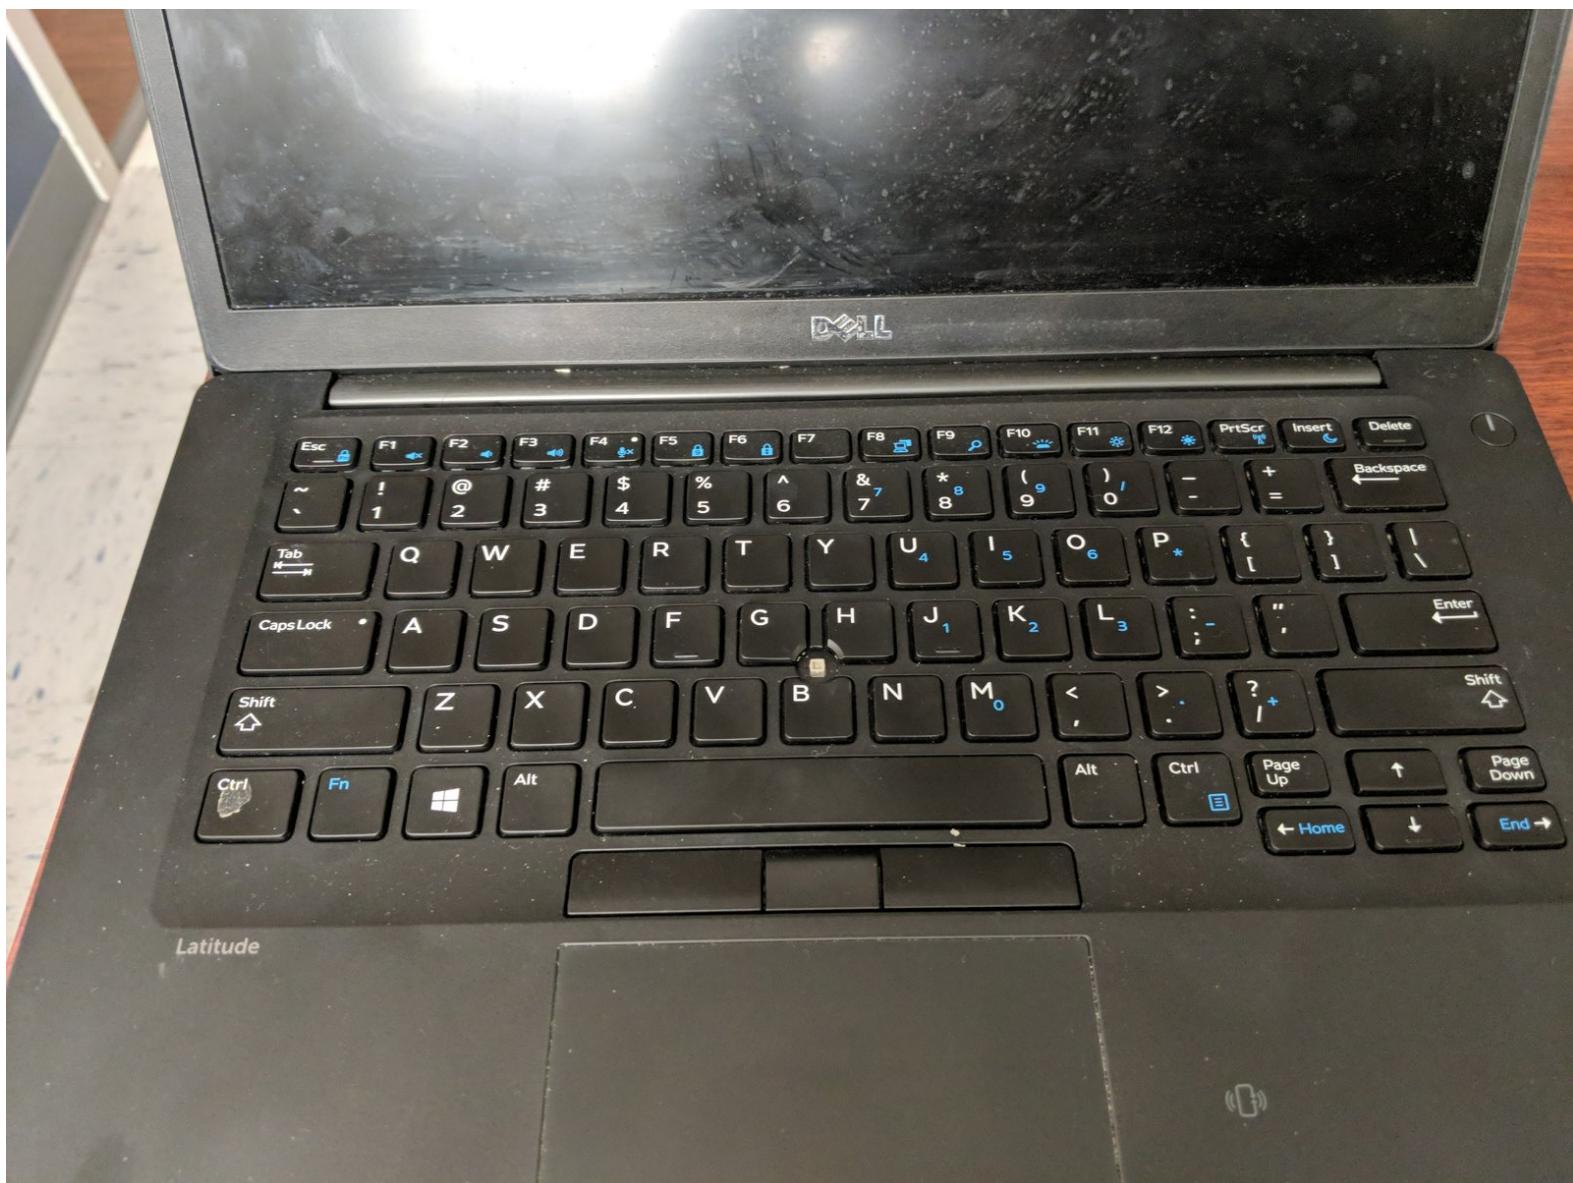

 **TOOLS:**

- Essential Electronics Toolkit (1)

 **PARTS:**

- Dell Latitude 7280 and 7480 Replacement Battery (1)

Step 1 — Battery replacement



- Make sure laptop is unplugged and powered off.

Step 2 — Remove back plate and exposed battery.




- Using the #2 bit from the iFixit tool kit remove the 8 screws. 3 on left, 3 on right and 2 in center. Remove the back plate.

Step 3 — Unscrew battery.



- Use the #2 bit from the iFixit tool kit. Remove two screws holding the battery in place.
- Using twisters remove the tape holding the cord in place from the battery.

Step 4 — Disconnect battery cable from motherboard.

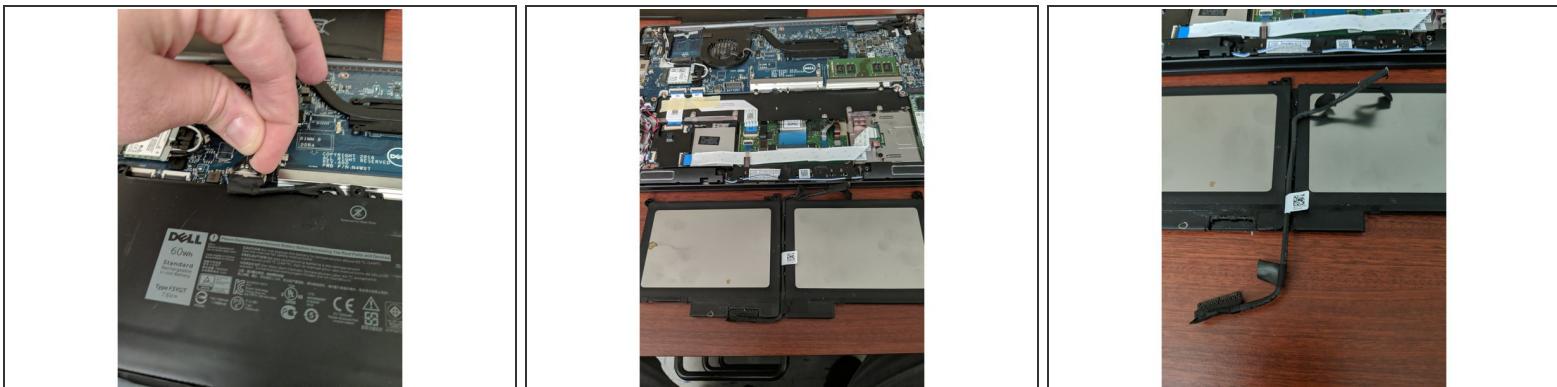


- Using the pull tabs pull up and remove the battery connector from the motherboard.
- Remove the battery and set aside to remove the connector cable. (If your new battery did not come with a connector cable you will need this.)
- Remove the connector cable. Set aside to apply to new battery.

Step 5 — Install battery cable to new battery.



- Apply battery cable to new battery. You can skip this step if your new battery came with one installed
- Connect one end of the battery core to the battery. Push until no more gold is showing. Put the cord in the channel between battery cells.

Step 6 — Install new battery and test.

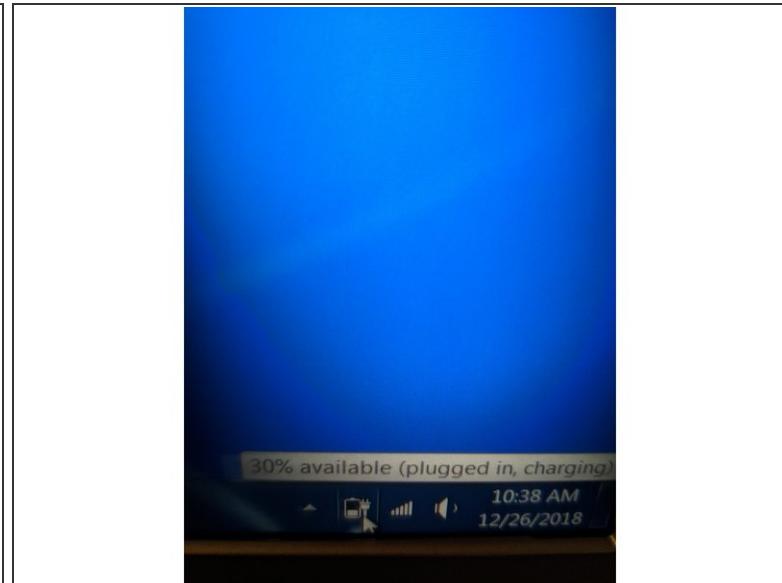

- Install the new battery by doing the steps in reverse. Be sure to test the device with and without AC power applied to the laptop.
- Dispose of old battery properly and safely.

To reassemble your device, follow these instructions in reverse order.