Dell Latitude D830 Keyboard Replacement

How to replace the keyboard on the Dell Latitude D830.

Written By: Talley

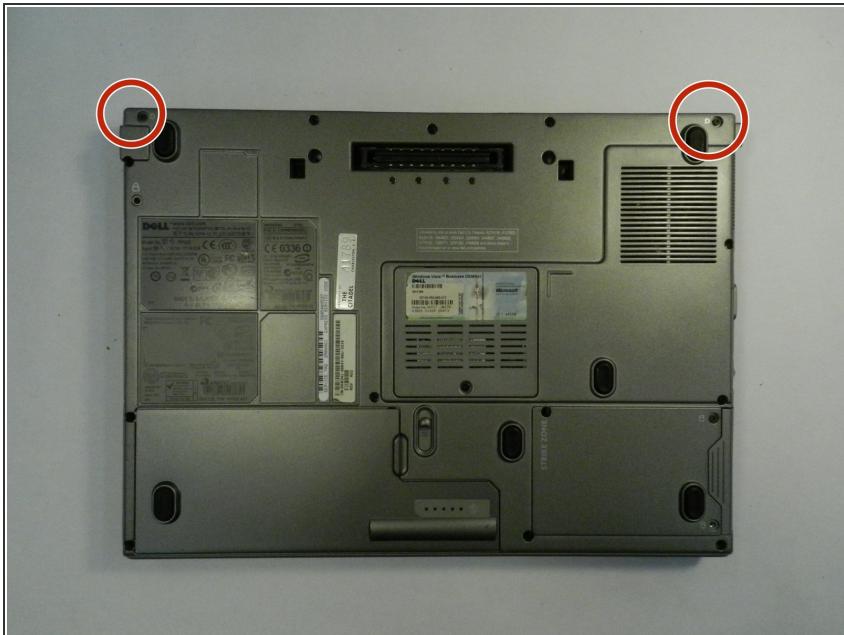This document was generated on 2019-10-30 09:30:24 PM (MST).

🔧 TOOLS:

- [Metal Spudger](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [64 Bit Driver Kit](#) (1)

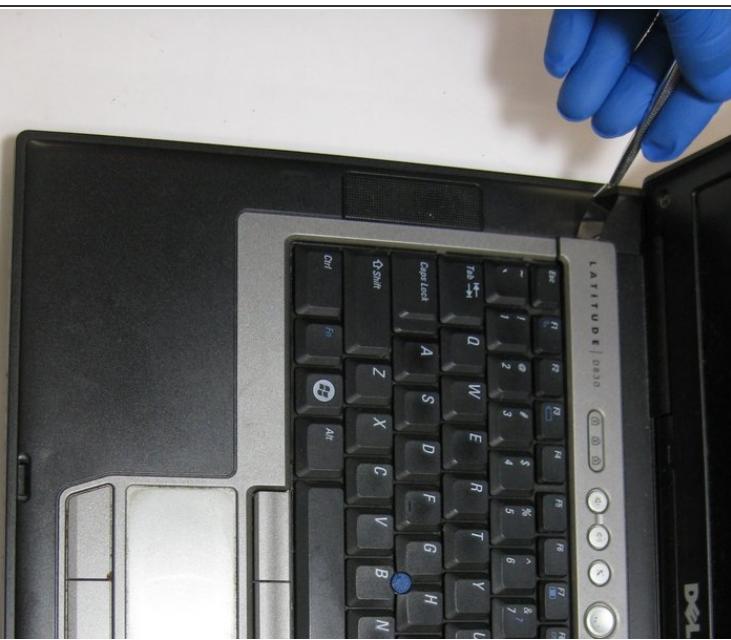This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 1 — Keyboard

- Orient the laptop so that the back is facing you.

- With a phillip's head screwdriver, remove the two screws on the back corners of the laptop.

Step 2

- Flip the laptop over, with the opening still facing up.

- With a phillip's head screwdriver remove the two screws in the upper two corners.

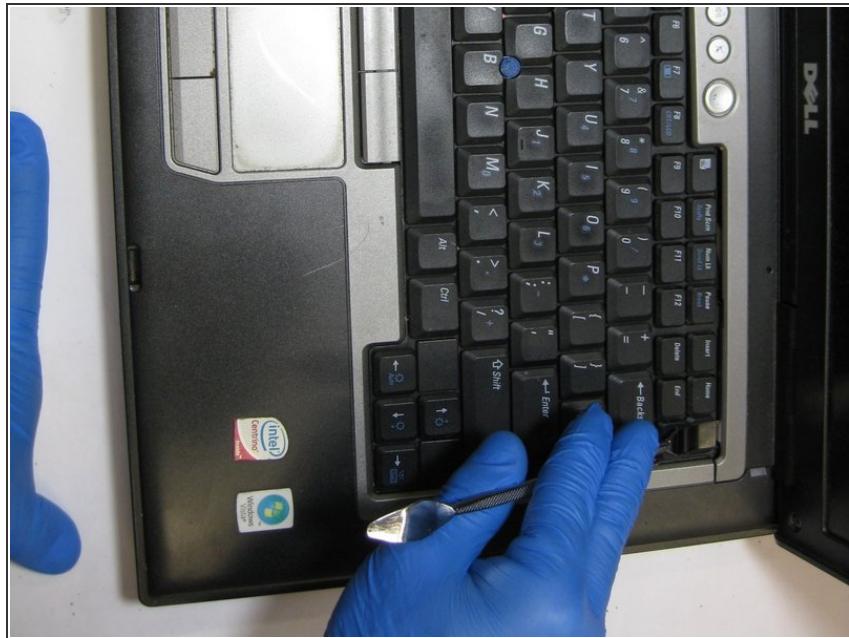This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 3

- Open the laptop up. Displaying the keyboard and screen.

- Take a spudger and insert it under the left edge of the panel between the keyboard and screen.

- Use the spudger to pry under the panel.

Step 4

- Place the spudger under the middle of the panel and use it to pry the panel off.

This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 5

- Place the spudger under the right side of the panel and use it to pry the panel off.

- For additional help the spudger can be placed around the edge of the panel and used to pry it off.

Step 6

- After you have the panel popped out, then you must pull the screen up as shows in the picture.

This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 7

- The screen will only be connected by the wiring.

- Take the screen and gently place it on the table as shown in the picture.

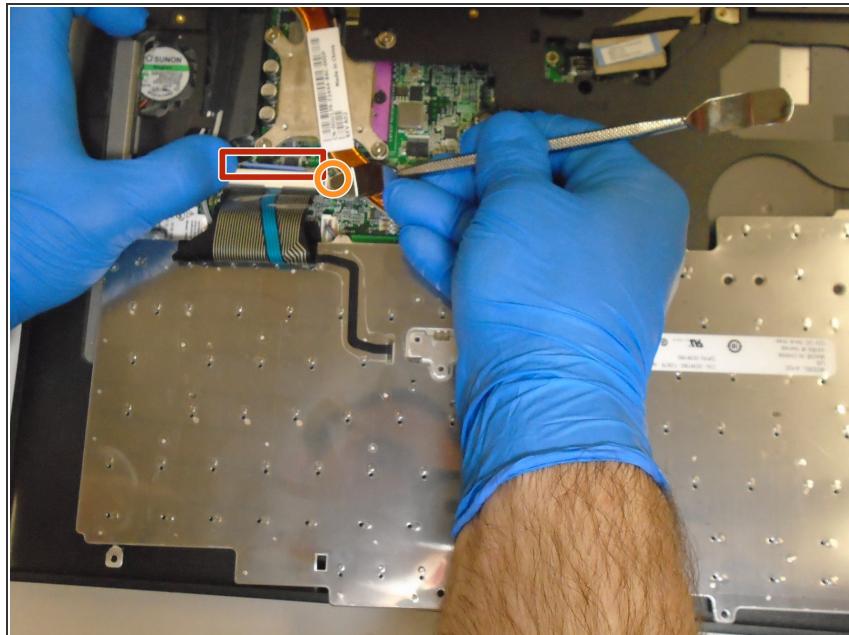- Now you must remove the three screws highlighted in the picture.

Step 8

- After removing the three screws, slide the keyboard out so the mainframe of it is loose.

- The a component still attached at the bottom.

This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 9

- The highlighted item should be the only component holding the keyboard on.

Step 10

- Where the rectangle is, there is a silver lever that you must push back.

- Then where the circle is on the photo, you must take the spudger and push in.

- This will then pop the white clip off and the keyboard will be free.

This document was generated on 2019-10-30 09:30:24 PM (MST).

Step 11

- The keyboard is now completely detached, and is ready to be replaced.

To reassemble your device, follow these instructions in reverse order.