




Dell Precision M3800 Memory Module Replacement

Written By: Johnathan Hammond

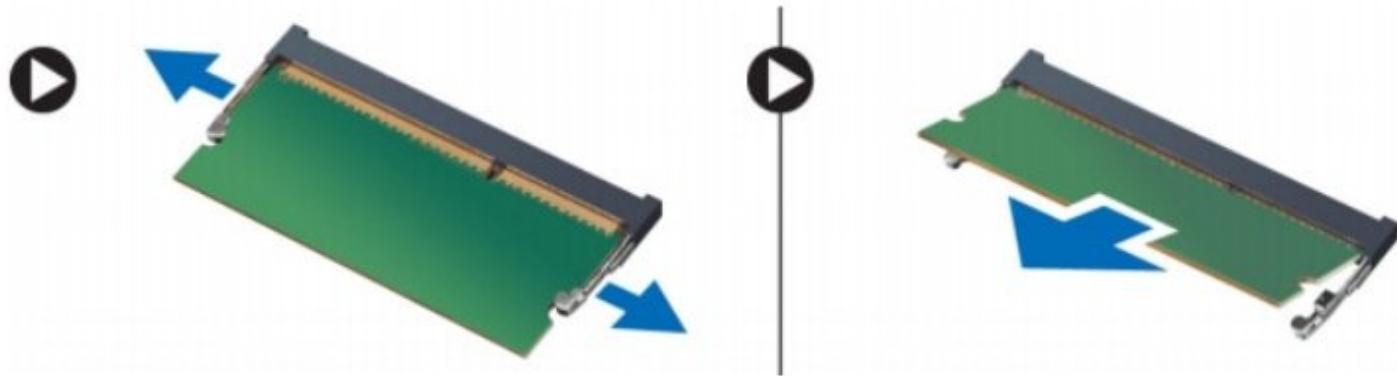

 **TOOLS:**

- [T5 Torx Screwdriver \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Base Cover




- Turn the system badge fap over and place it on the base cover.
- Remove the screws that secure the base cover to the computer. Release and remove the base cover from the computer.

i NOTE: To remove the screws from the base cover, use a T5 Torx screwdriver.


- Lift up and remove the base cover from the computer.

Step 2 — Battery

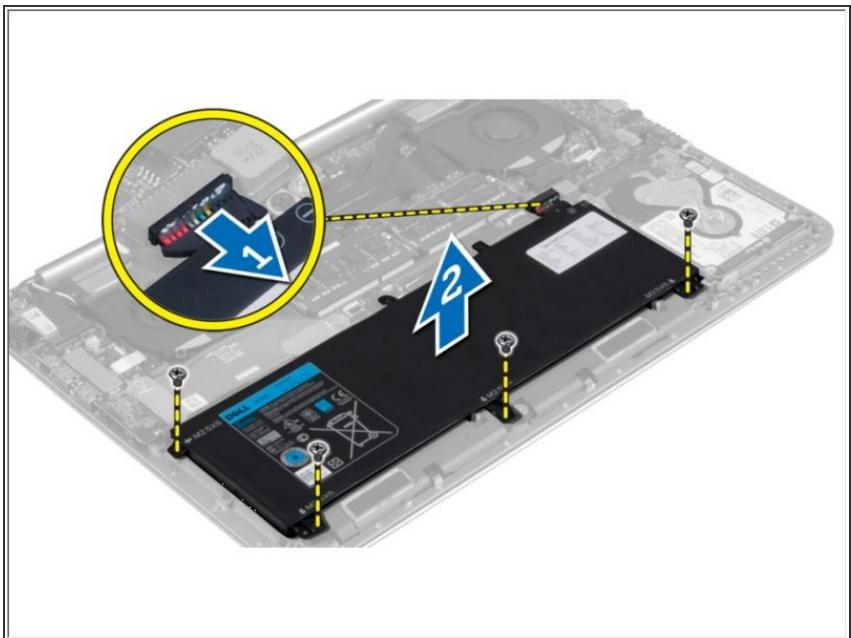

- Disconnect the battery cable from the system board [1].
- Remove the screws that secure the battery to the computer.
- Lift the battery off the computer [2].

Step 3 — Memory Module

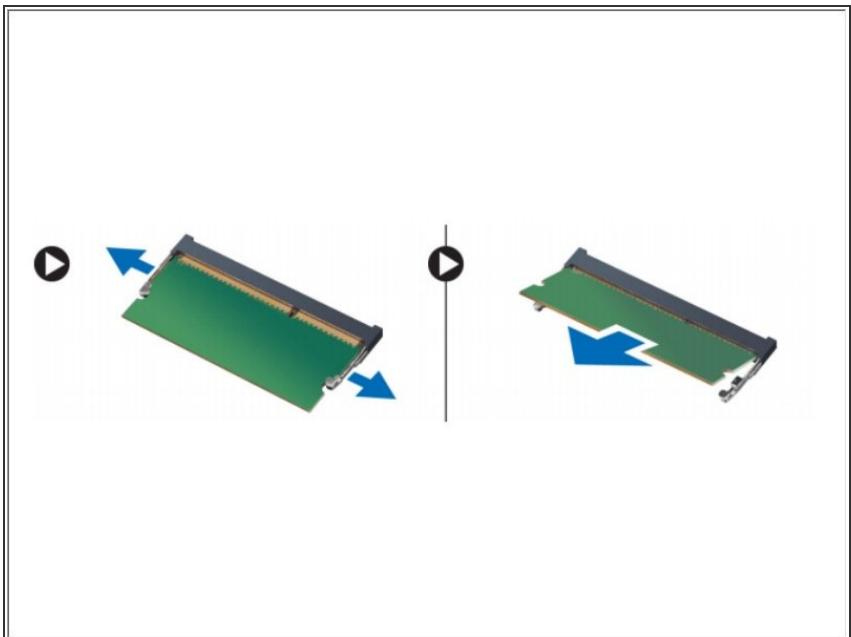

- Pry the securing clips away from the memory module until it pops-up. Remove the memory module from its connector on the system board.

To reassemble your device, follow these instructions in reverse order.