



# Dell Precision M4600 KeyBoard Replacement

Written By: Johnathan Hammond



 **TOOLS:**

- **Spudger** (1)
- **Phillips #0 Screwdriver** (1)

## Step 1 — Battery



- Slide the battery release latch into the unlock position.
- Remove the battery from the system.

## Step 2 — Keyboard Trim




- Using a plastic scribe, pry under the keyboard trim to release it from the computer.
- Work your way around the sides and bottom edge of the keyboard trim.
- Lift up to remove the keyboard trim from the unit.

## Step 3 — KeyBoard




- Remove the screws securing the keyboard in place.
- Starting from the bottom of the keyboard, separate the keyboard from the system and turn the keyboard over.
- Disconnect the keyboard data cable from the system board.

## Step 4

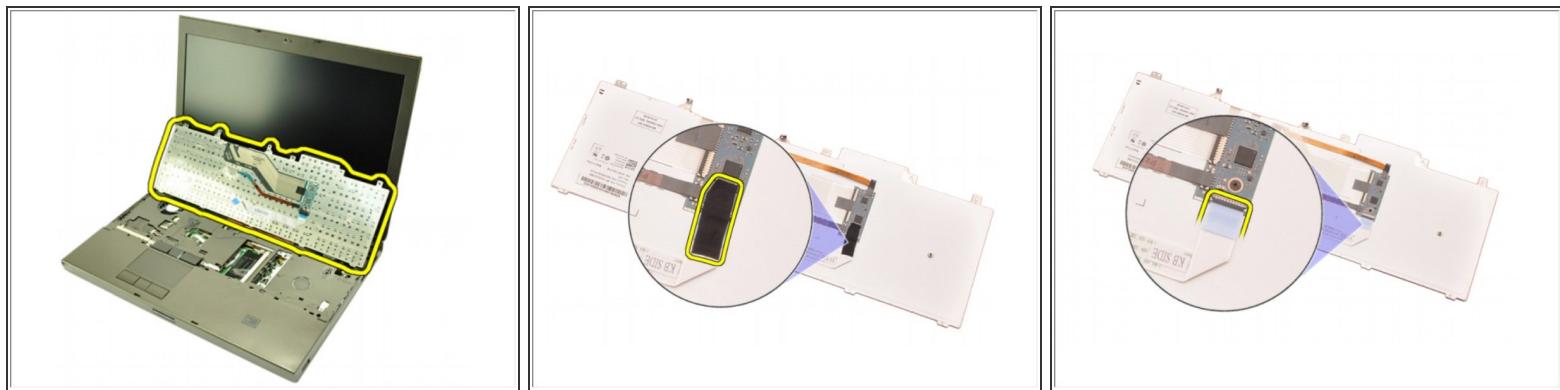

- Remove the keyboard.
- Peel back the adhesive tape securing the keyboard data cable to the back of the keyboard.
- Disconnect the keyboard data cable from the back of the keyboard.

## Step 5

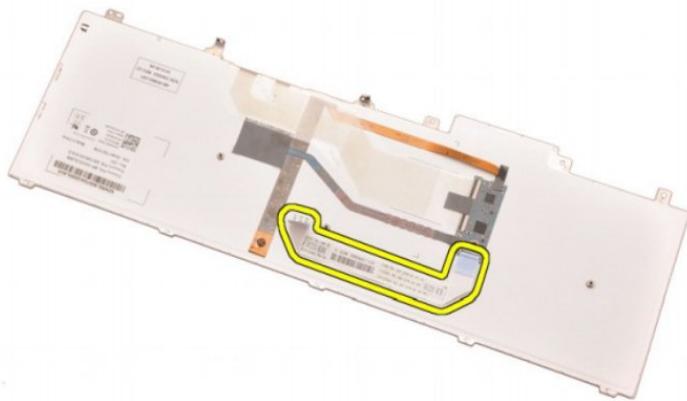

- Peel the keyboard data cable away from the keyboard and remove.

To reassemble your device, follow these instructions in reverse order.