



Dell Streak 7 Headphone Jack Replacement

Replace the headphone jack in your Dell Streak 7.

Written By: Ali Benjelloun



INTRODUCTION

Use this guide to replace the headphone jack on your Dell Streak 7. This guide will show you how to remove the old headphone jack.

TOOLS:

- [iOpener](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Tweezers](#) (1)

Step 1 — Front Panel Assembly



- Insert the spudger under the capacitive button panel, and slide the spudger all the way around.

i You will want to heat up the screen edges with the [iOpener](#) to help facilitate removal.

Step 2



- Remove the button cover by lifting the cover away from the tablet.

Step 3



- Using the Torx screwdriver, remove the 4mm screws.

Step 4



- With the Torx screwdriver, remove the two 5mm screws.

Step 5



- Using the spudger, insert it under the black side panel. Slide the spudger all the way around until the cover piece comes off.
- With the Torx screwdriver, remove the two 4mm screws.

Step 6



- Use the spudger to go along the edges of the device and pop out the latches securing the display to the case.

Step 7




i Ribbon cables are very sensitive and prone to breaking

- Disconnect the ribbon cables by unlocking the connector and pulling the cable out slowly.

! Make sure all the cables are unplugged before opening the device completely. Failure to do so might lead to broken or torn cables.


Step 8 — Headphone Jack

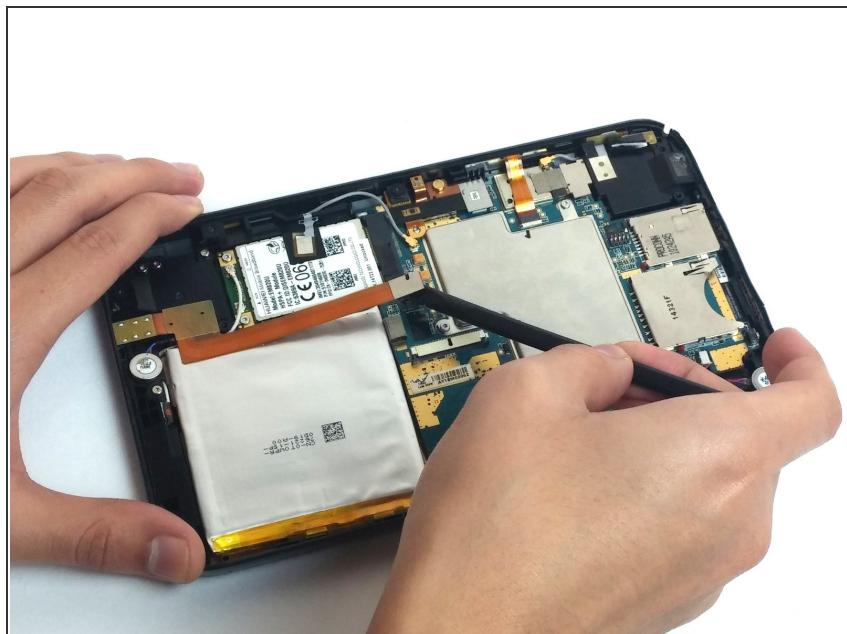

- Using the spudger, disconnect the ribbon cable by lifting up on the connector.

i Ribbon cables are fragile and easily broken.

Step 9

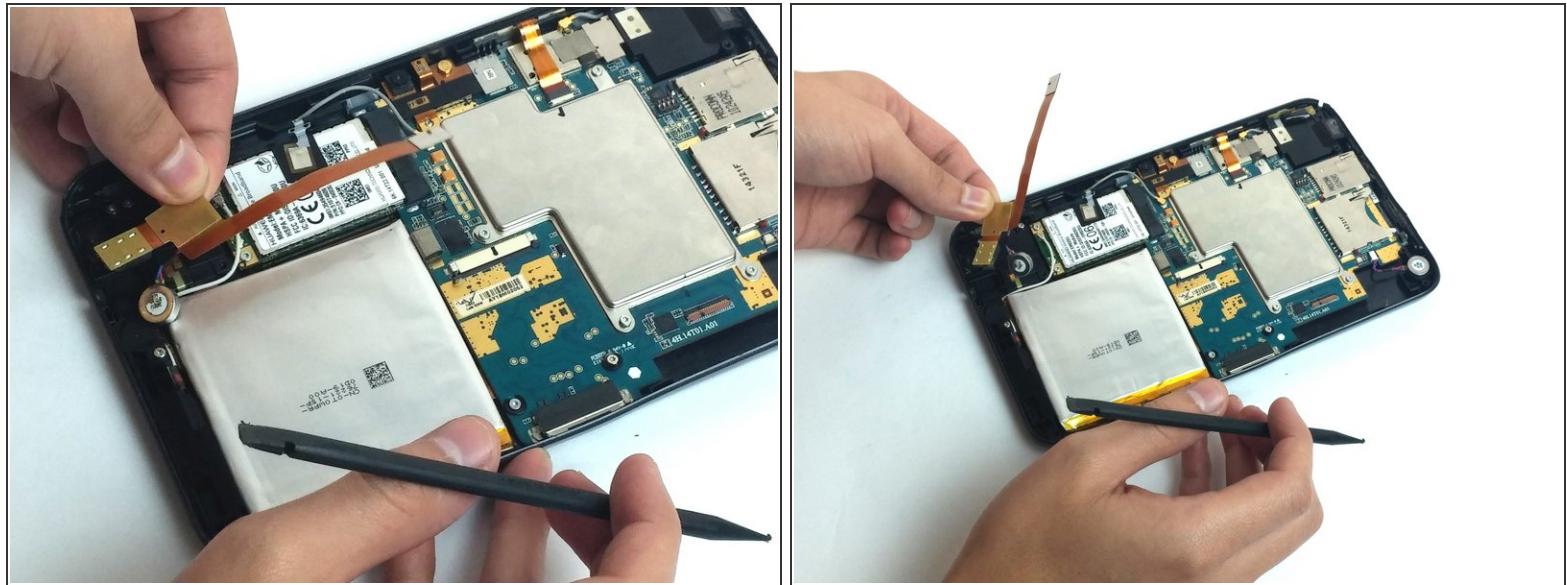

- Pull the headphone jack up, away from the case.

To reassemble your device, follow these instructions in reverse order.