




Dell Vostro 1310 Hard Drive Replacement


Written By: Johnathan Hammond

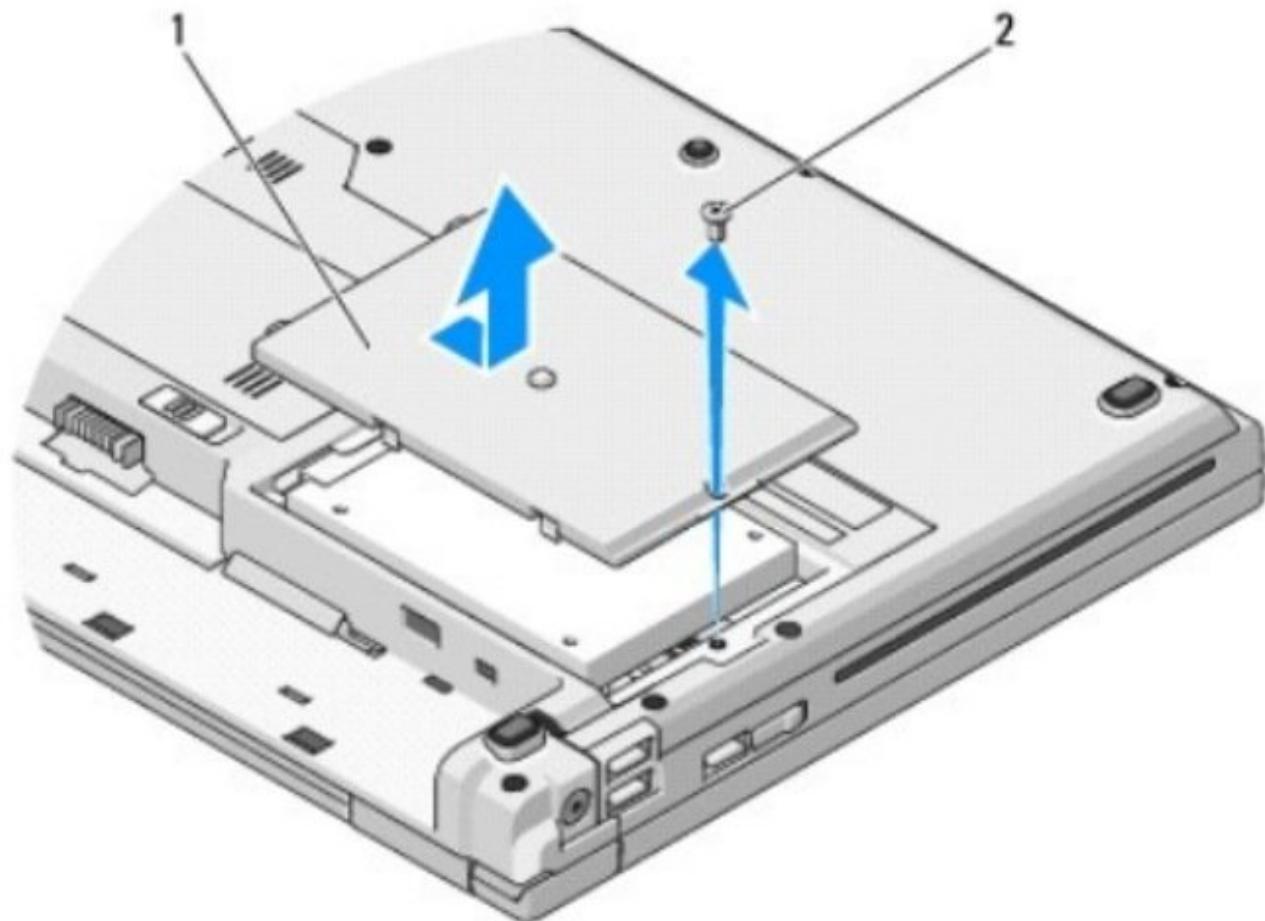

 **TOOLS:**


- Phillips #0 Screwdriver (1)

Step 1 — Battery

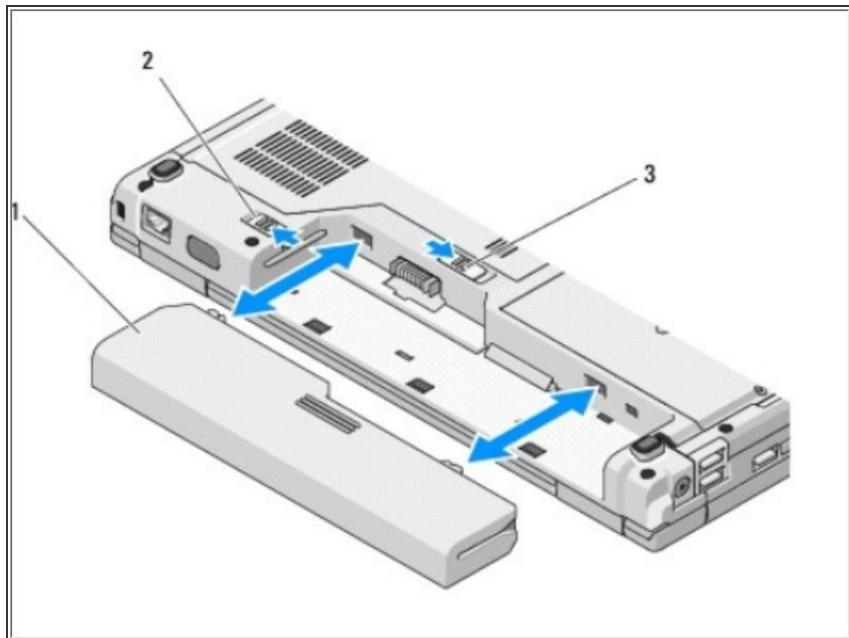


- Slide the battery lock to the open position. {2}
- Slide the battery latch release to the open position. (You may need to hold the latch release in the open position while removing the battery.){3}
- Slide the battery out of the battery bay. {1}

Step 2 — Hard Drive

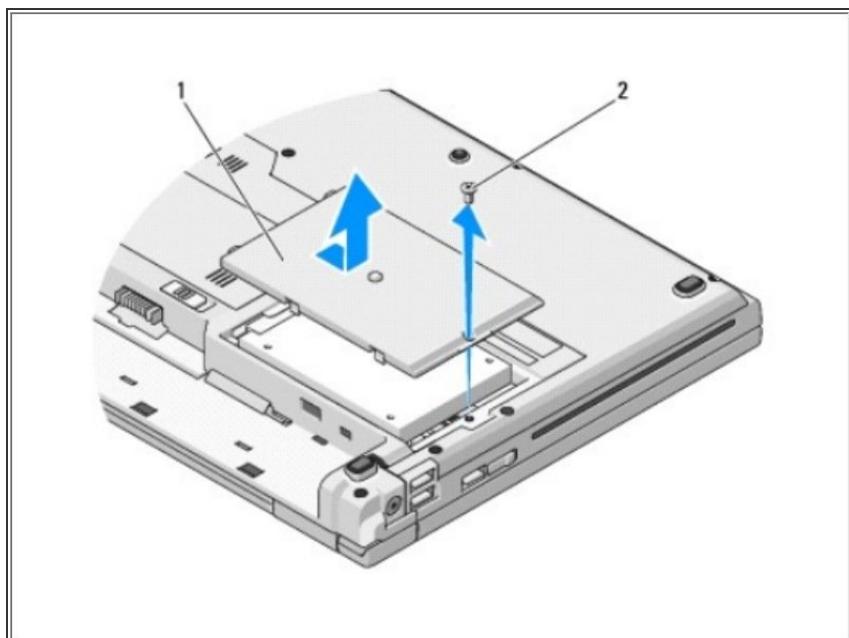

- Remove the M2.5 x 5-mm screw that secures the hard-drive compartment cover. {2}
- Remove the cover and set it aside.{1}

Step 3

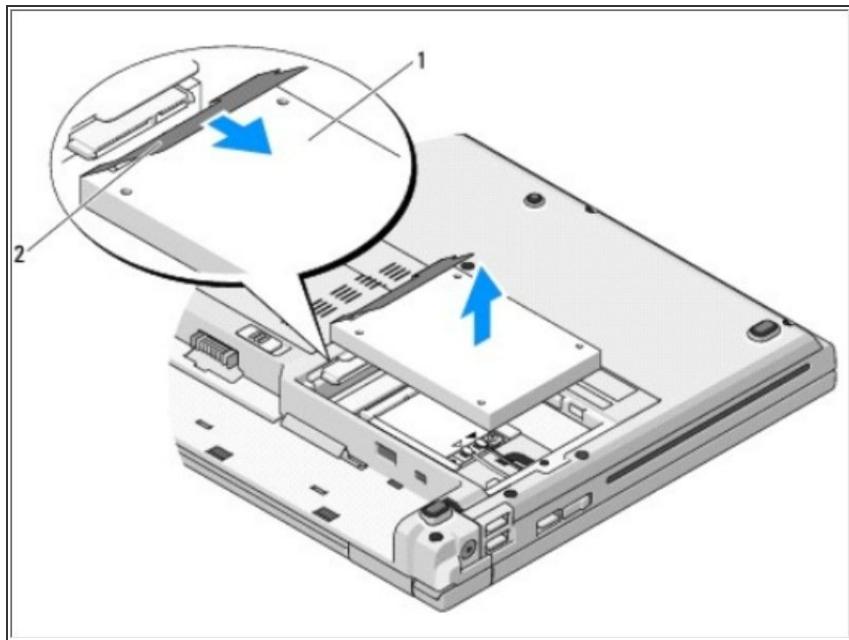

NOTICE: When the hard drive is not in the computer, store the drive in protective antistatic packaging.

- Remove the two screws securing the hard drive to the hard-drive bracket.
- Slide the hard drive out of the hard-drive bracket.
- Pull the mylar tab to release the hard drive.
- Lift the hard drive out of the computer.

To reassemble your device, follow these instructions in reverse order.