




# Dell Vostro 15 3568 Hard Drive Bracket Replacement


Written By: Johnathan Hammond

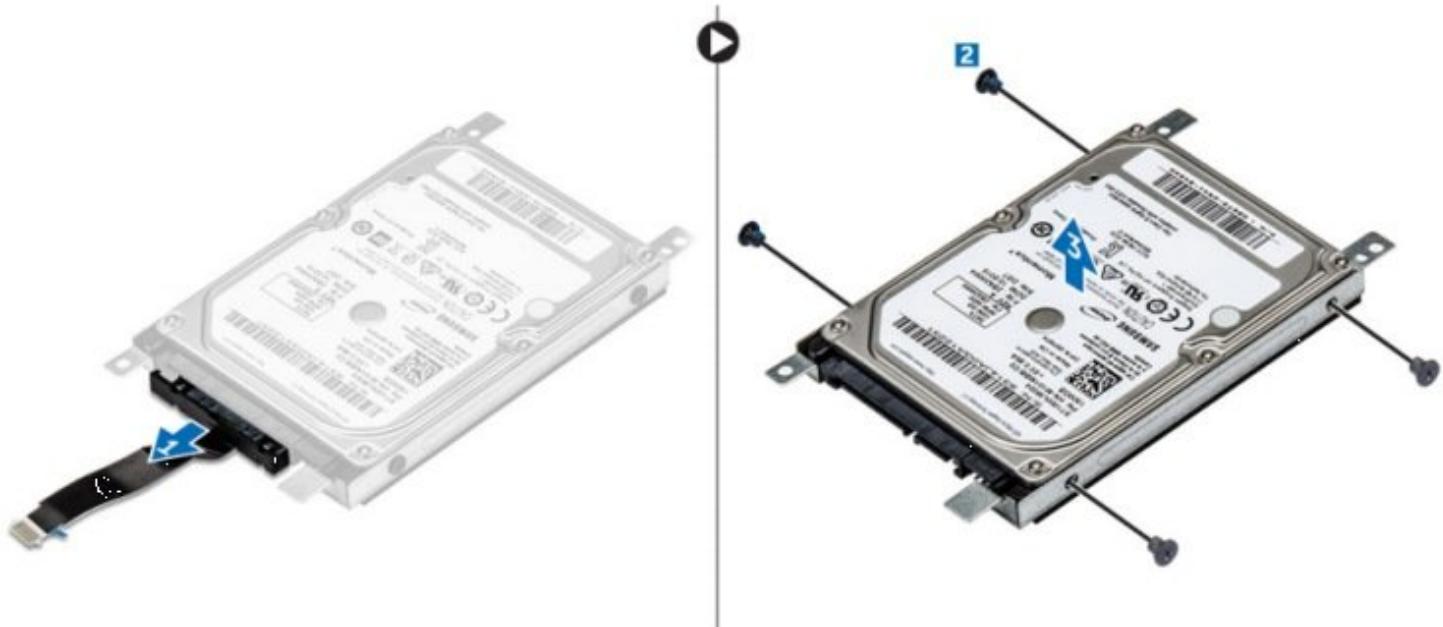

 **TOOLS:**

- **Spudger** (1)
- **Phillips #0 Screwdriver** (1)

## Step 1 — Battery

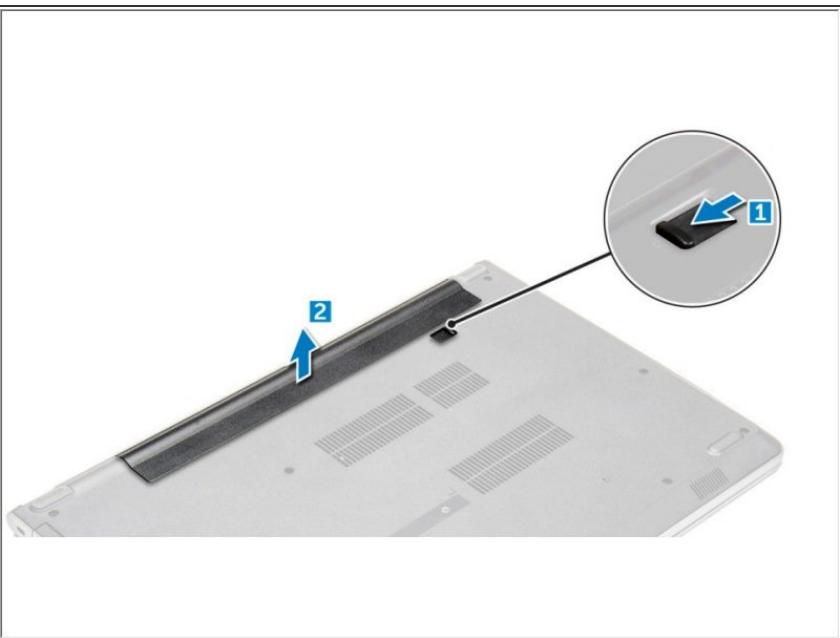

- Slide the release latch to release the battery [1].
- Remove the battery from the computer [2].

## Step 2 — KeyBoard




- Release the keyboard by prying on the keyboard release tabs using a plastic scribe [1].
- Slide and lift the keyboard to access the keyboard connector cable under the keyboard [2].

## Step 3




- Disconnect the keyboard cable from the system board.
- Lift the keyboard cable to remove it from the computer.

## Step 4 — Base Cover

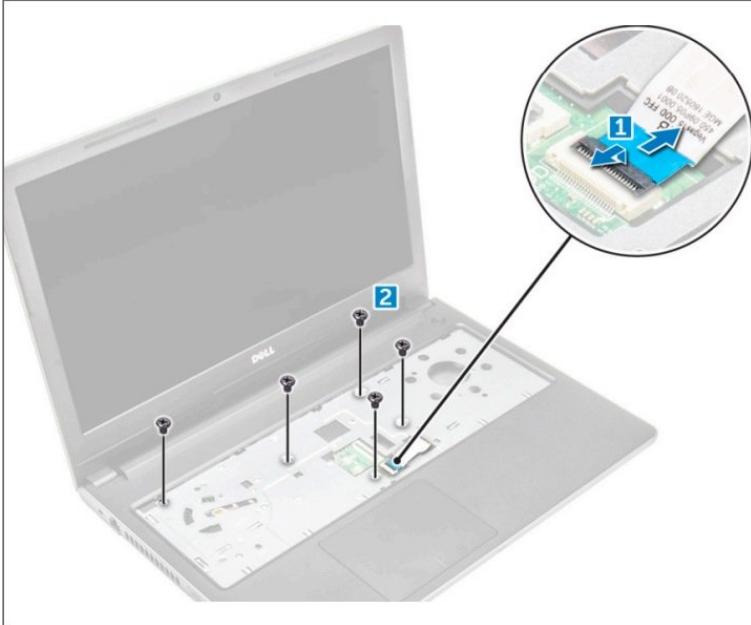


- Disconnect the optical drive connector and lift it to remove it from the system board [1].
- Remove the screws inside the palmrest [2].

## Step 5

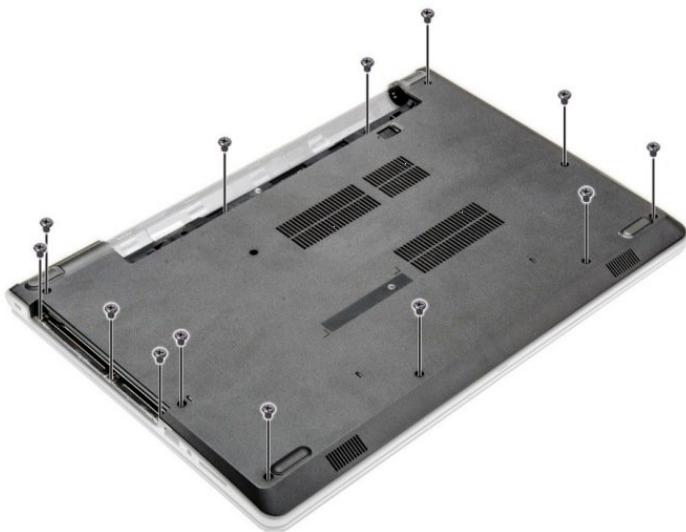


- Remove the screws that secure the base cover to the computer

## Step 6

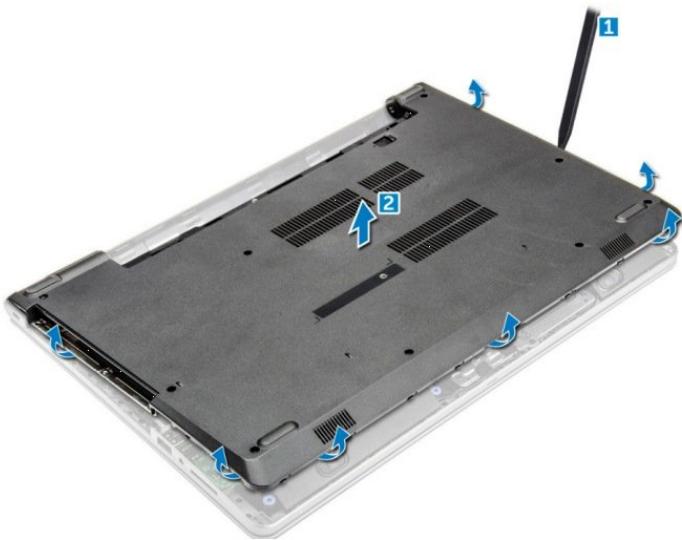


- Pry the edges of the base cover [1].
- Lift the base cover and remove it from the computer [2].

## Step 7 — Hard Drive

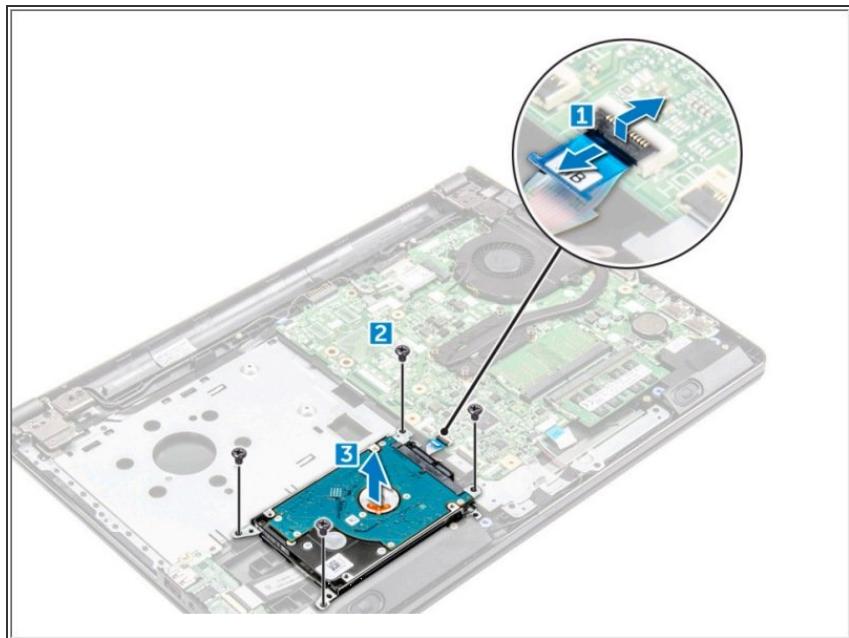

- Disconnect the hard drive cable from the connector on the system board [1].
- Remove the screws that secure the hard drive assembly to the computer [2].
- Lift the hard drive assembly away from the computer [3].

## Step 8 — Hard Drive Bracket

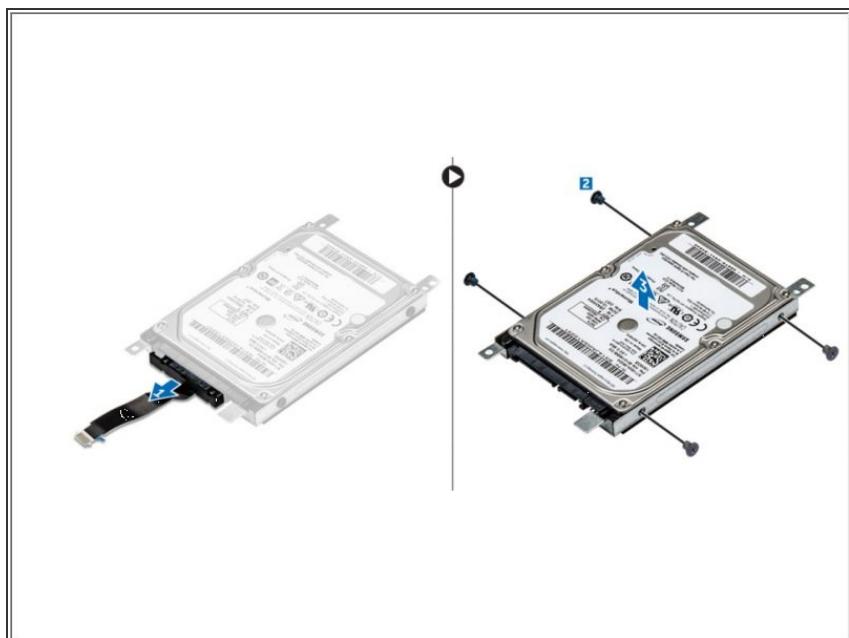

- Pull the hard drive cable connector to remove it from the hard drive [1].
- Remove the screws that secure the hard drive bracket to the hard drive [2].
- Lift the hard drive from the hard drive bracket [3].

To reassemble your device, follow these instructions in reverse order.