




# Dell Vostro 15 Memory Module Replacement


Written By: Johnathan Hammond

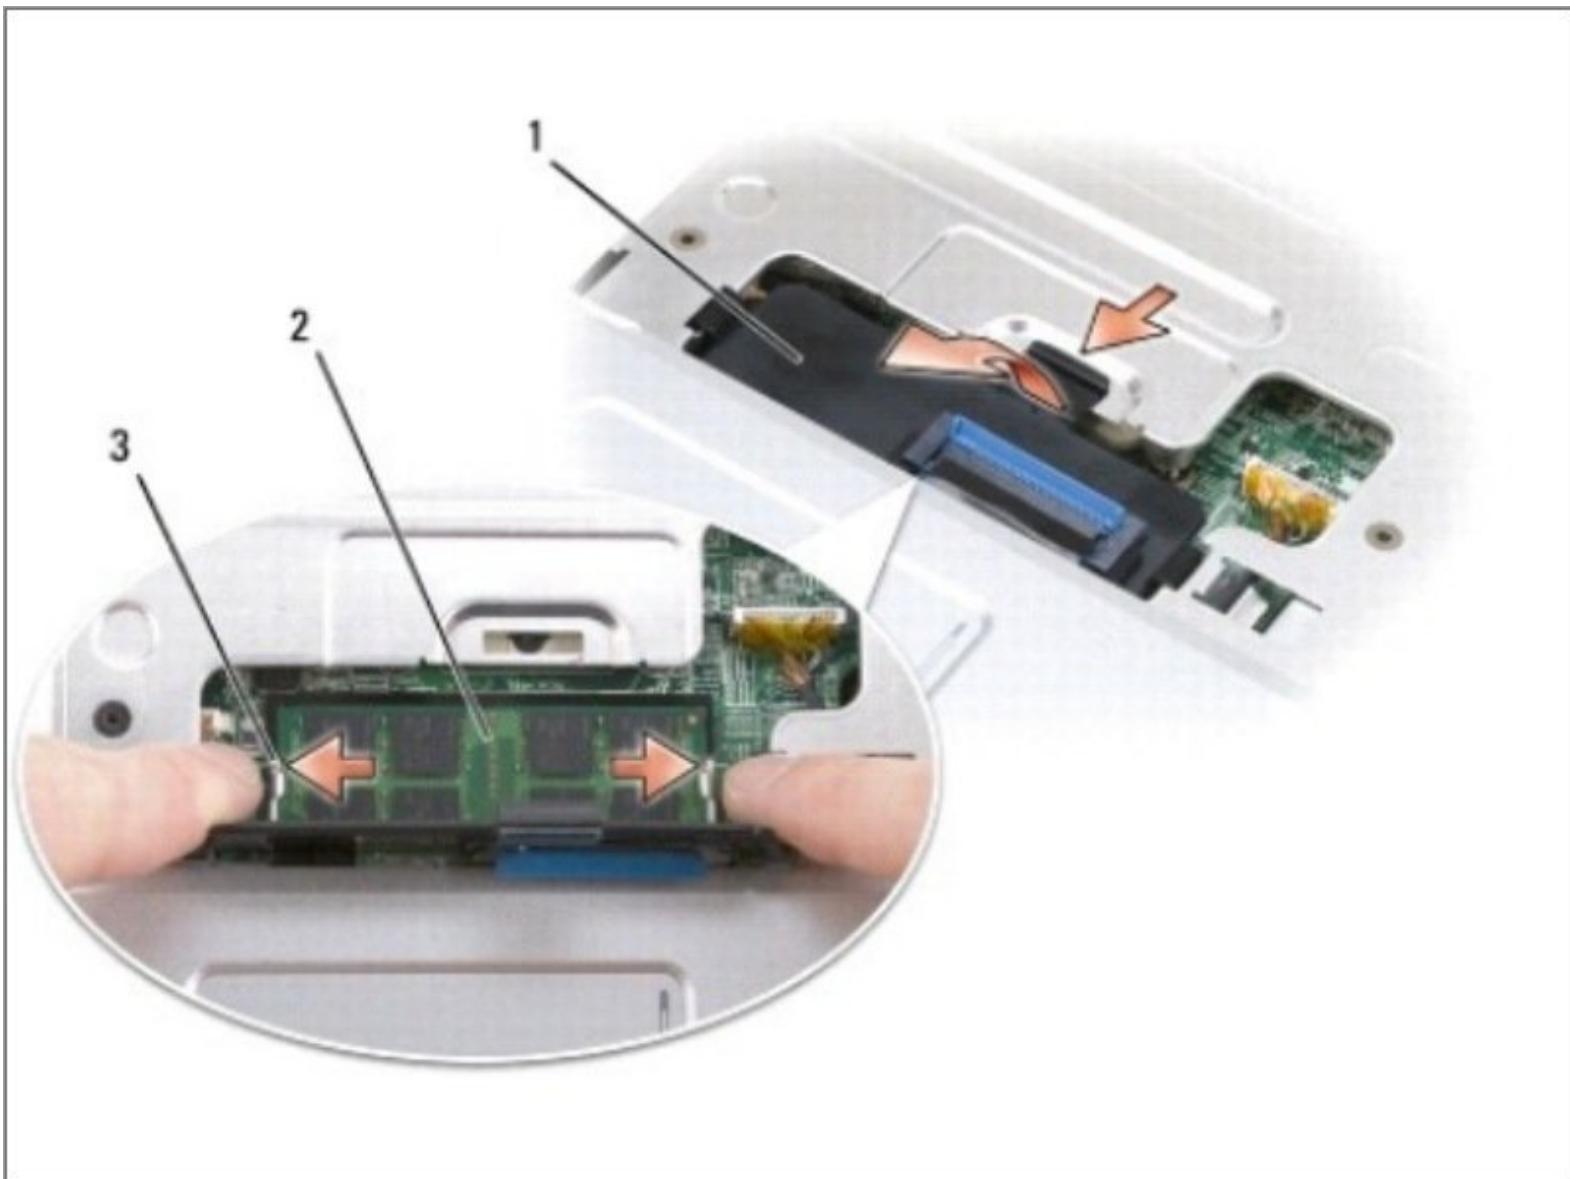

 **TOOLS:**


- **Spudger** (1)
- **Phillips #0 Screwdriver** (1)

## Step 1 — Battery

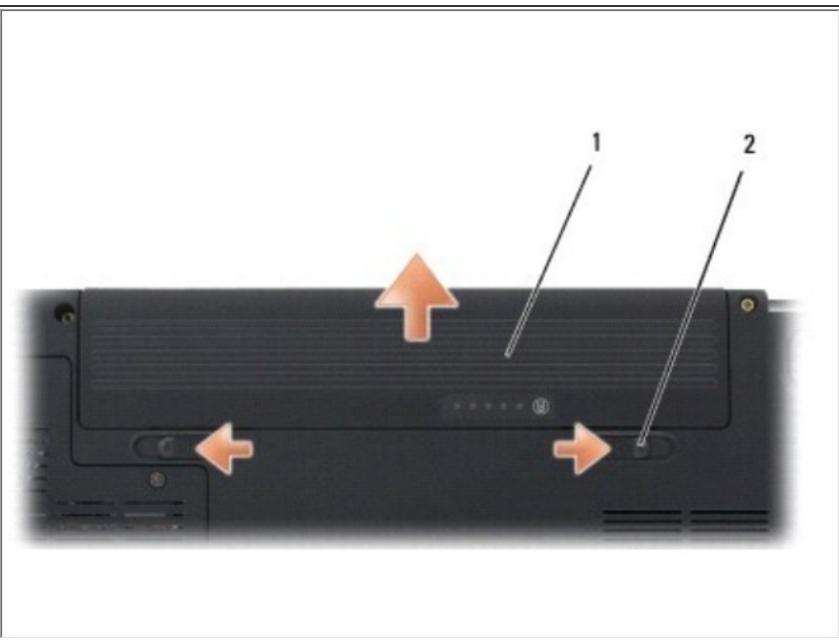


- Slide the battery release latches until they click into place.
- Slide the battery out of the battery bay.

## Step 2 — Hinge Cover

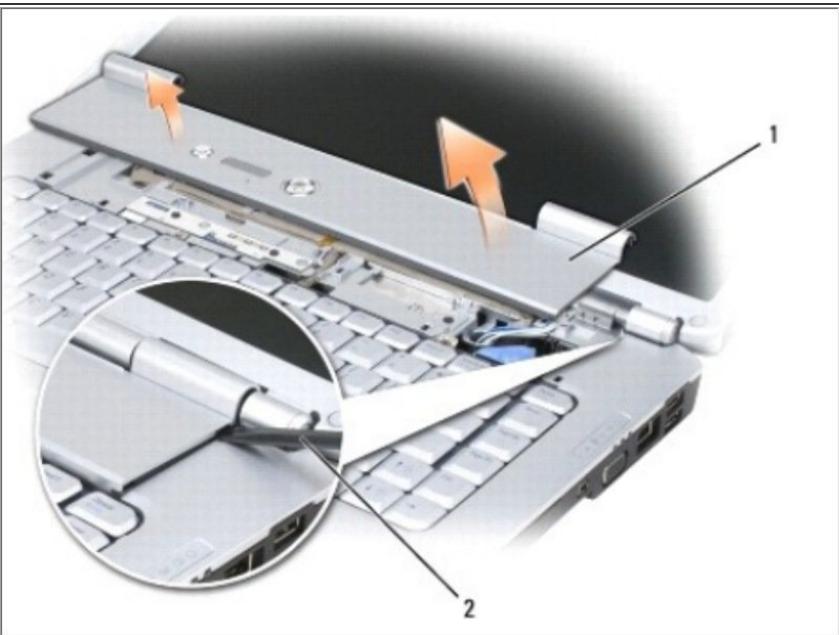

- Open the display all the way so that it rests flat on your work surface.
- **NOTICE:** To avoid damage to the hinge cover, do not lift the cover on both sides simultaneously.
- Insert a plastic scribe into the indent to lift the hinge cover on the right side.
- Moving from right to left, ease the hinge cover up, then remove it and set it aside.

## Step 3 — KeyBoard

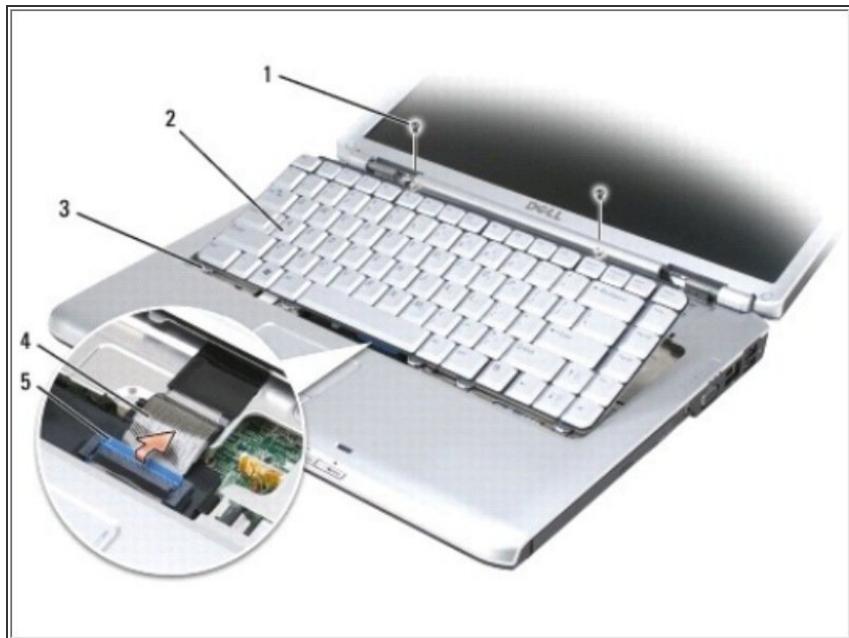


- Remove the two M2.5 x 5-mm screws at the top of the keyboard.

***(i)*** **NOTICE:** The key caps on the keyboard are fragile, easily dislodged, and time-consuming to replace. Exercise care when removing and handling the keyboard.

- Lift the keyboard and hold it up and slightly forward to access to the keyboard connector.
- Rotate the keyboard connector latch upward to release the keyboard cable.
- Slide the keyboard cable out of the keyboard connector.

## Step 4 — Memory Module

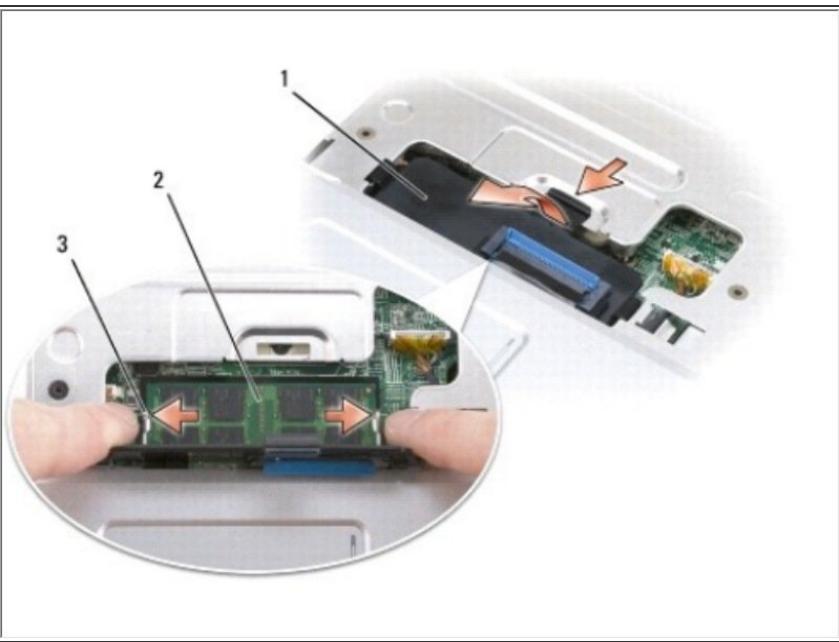

- Lift the memory module cover **But Do Not Remove It.**

***(i)*** NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
- Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.