




Dell Vostro 3458 Hard Drive Replacement

Written By: Johnathan Hammond

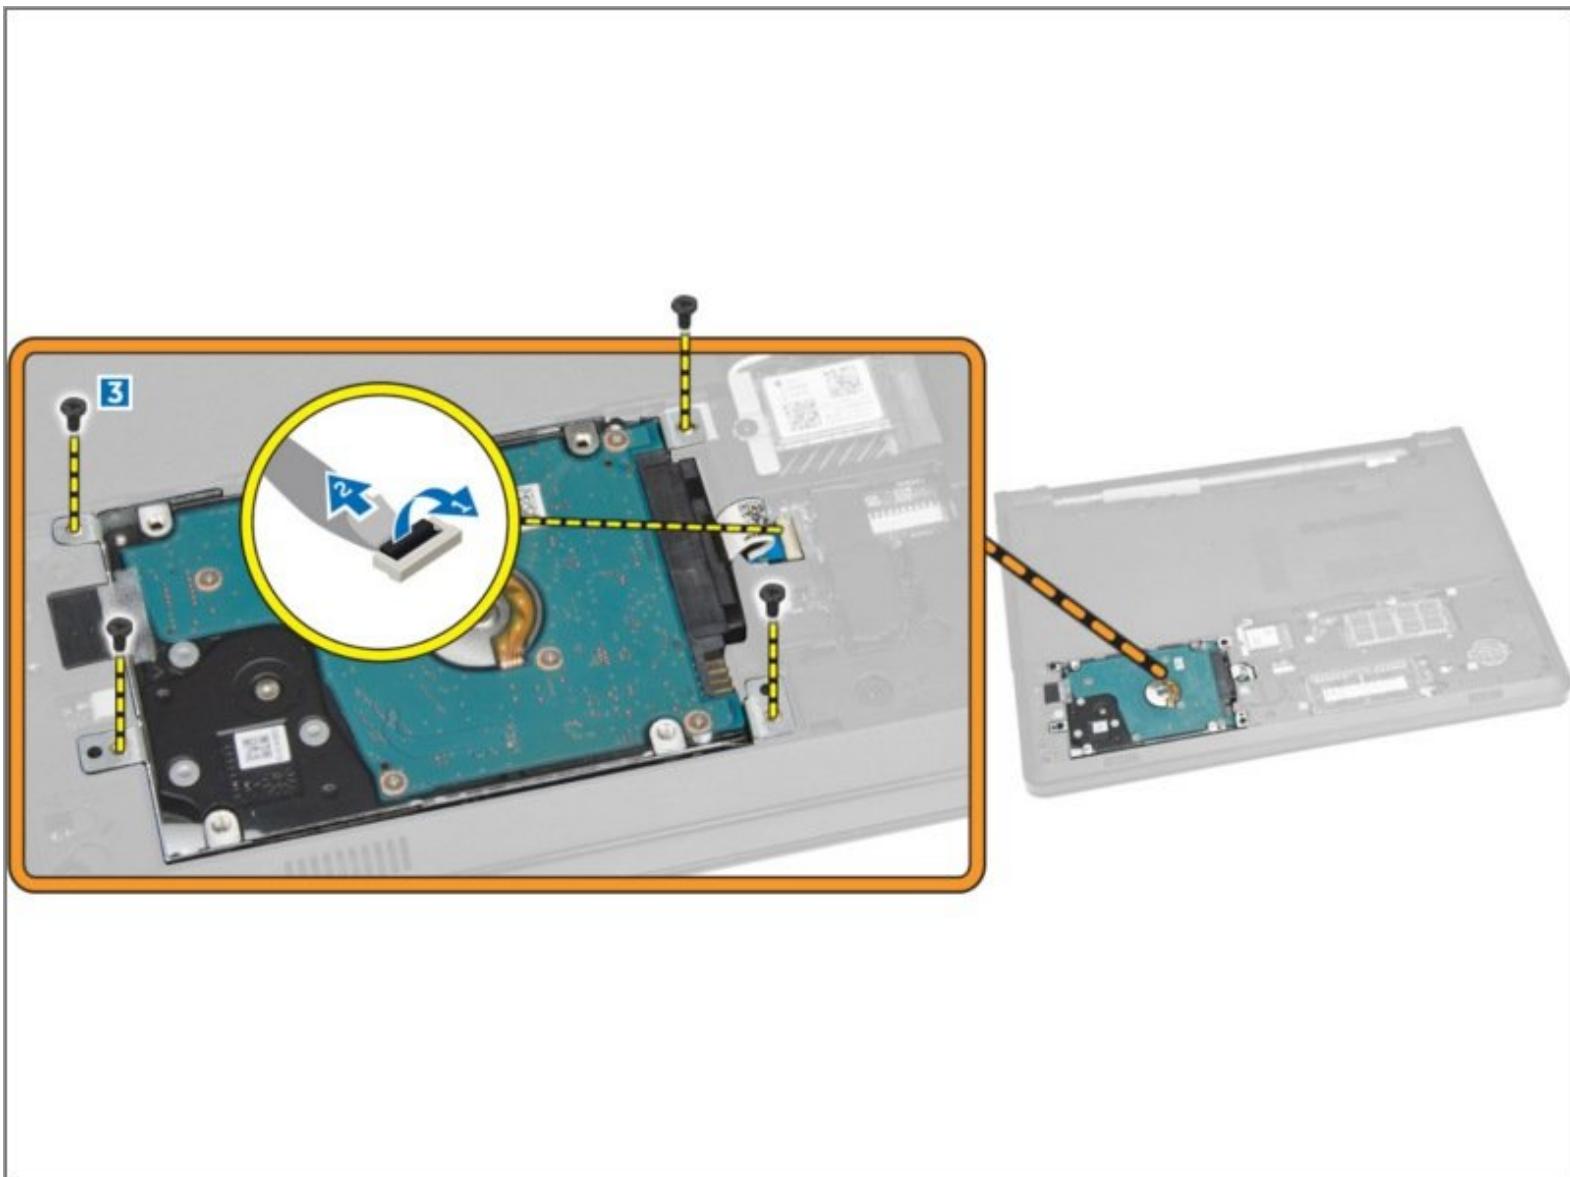


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.

TOOLS:


- Phillips #0 Screwdriver (1)

Step 1 — Releasing the Battery

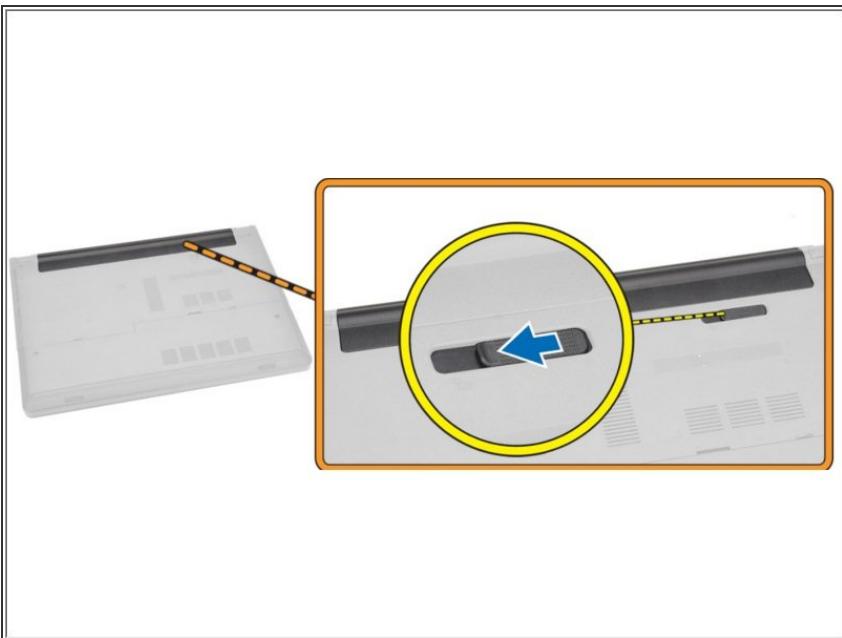


- Slide the release latch outwards to unlock the battery.

Step 2 — Lifting the Battery

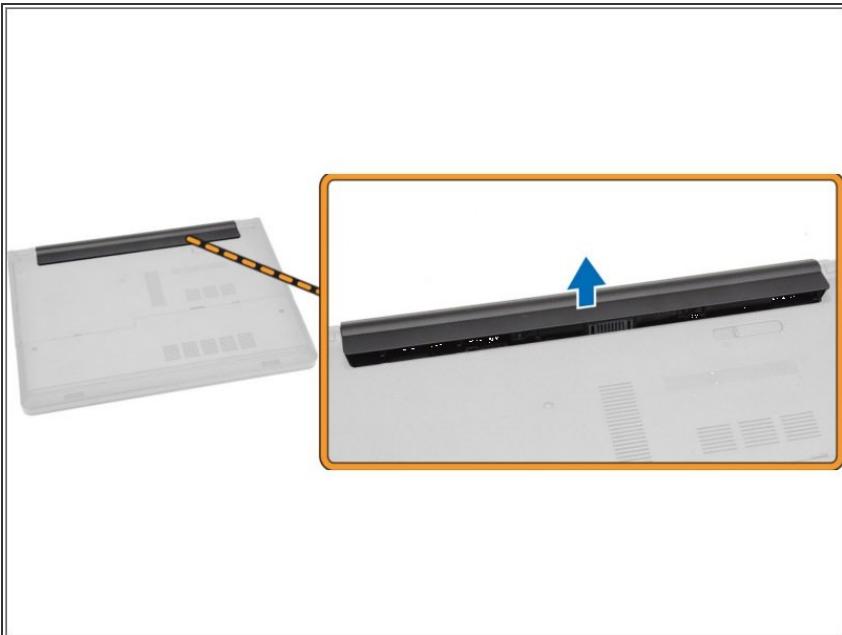


- Lift the battery to remove it from the computer.

Step 3 — Remove the Screws

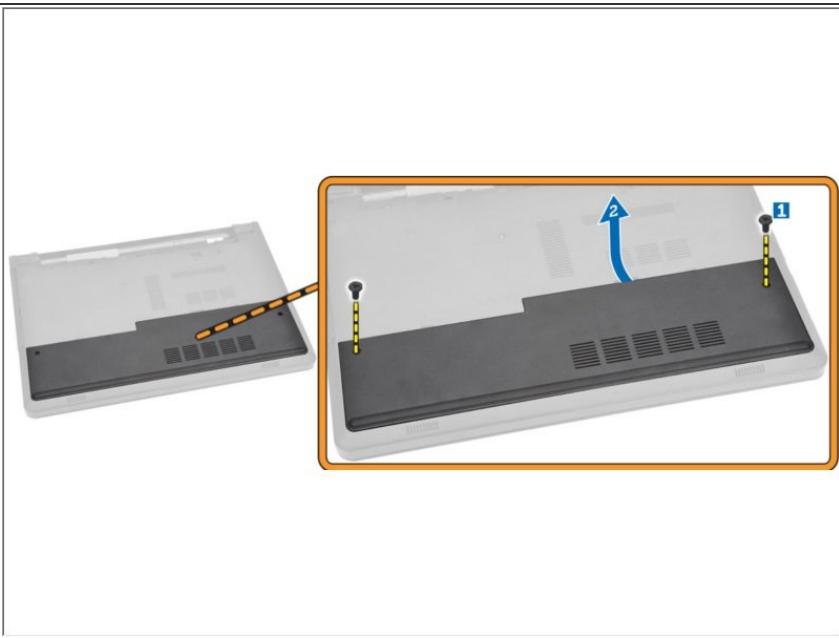


- Remove the screws that secure the access panel to the computer.
- Lift the access panel away from the computer.

Step 4 — Disconnecting the Cable

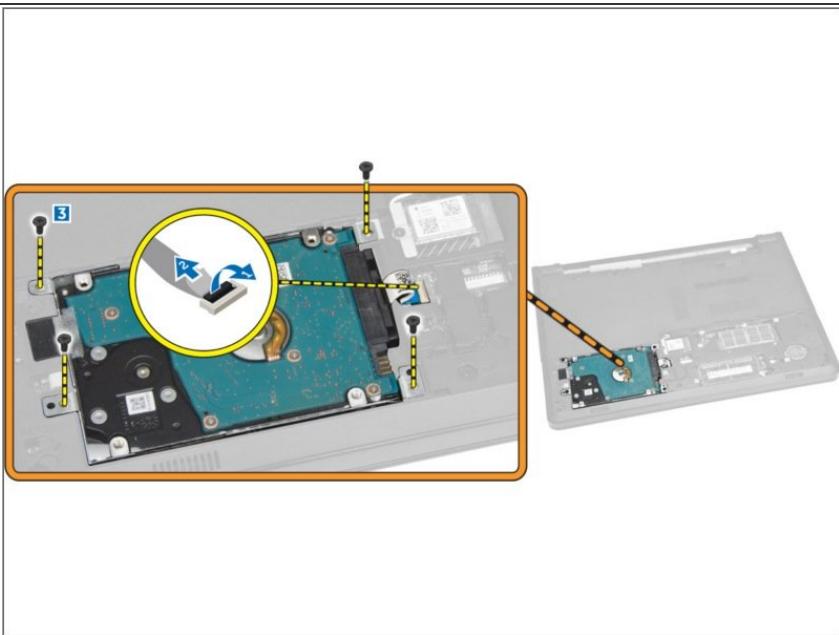


- Lift to release the tab.
- Disconnect the hard-drive cable from the system board.
- Remove the screws that secure the hard drive to the computer.

Step 5 — Remove the Tape

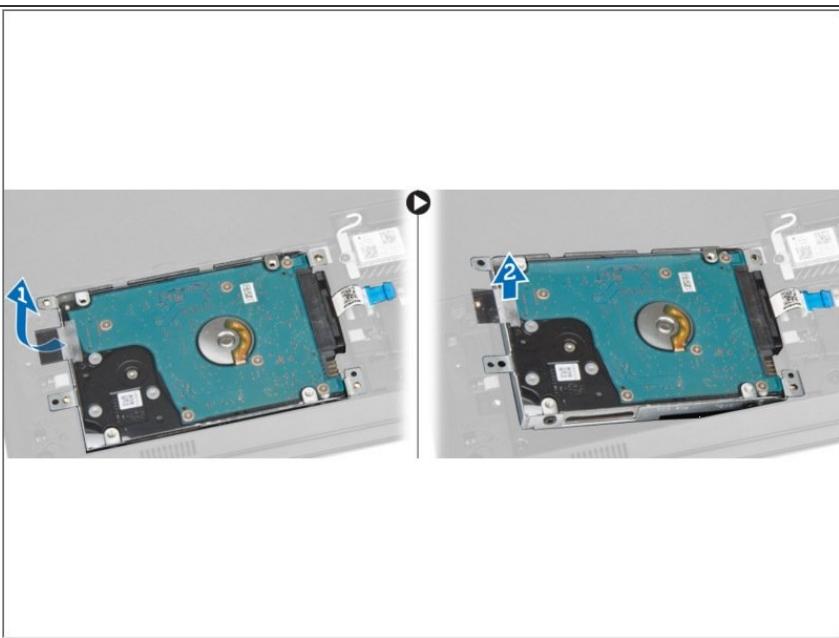

- Remove the tape and lift the hard drive to remove it from the computer.

Step 6 — Remove the Screws

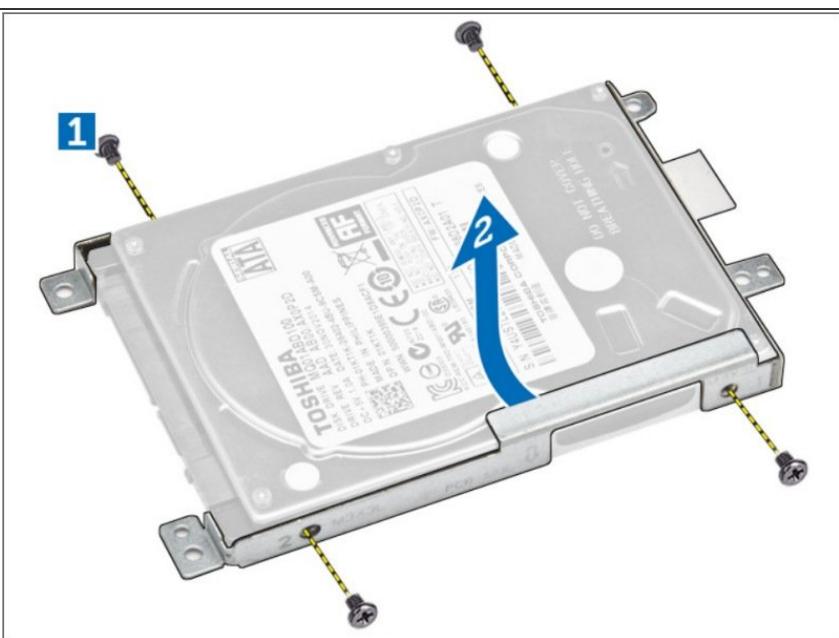

- Remove the screws that secure the hard drive to the bracket.
- Lift the hard drive away from the bracket.

To reassemble your device, follow these instructions in reverse order.