




Dell Vostro 3750 Hard Drive Replacement

Written By: Johnathan Hammond

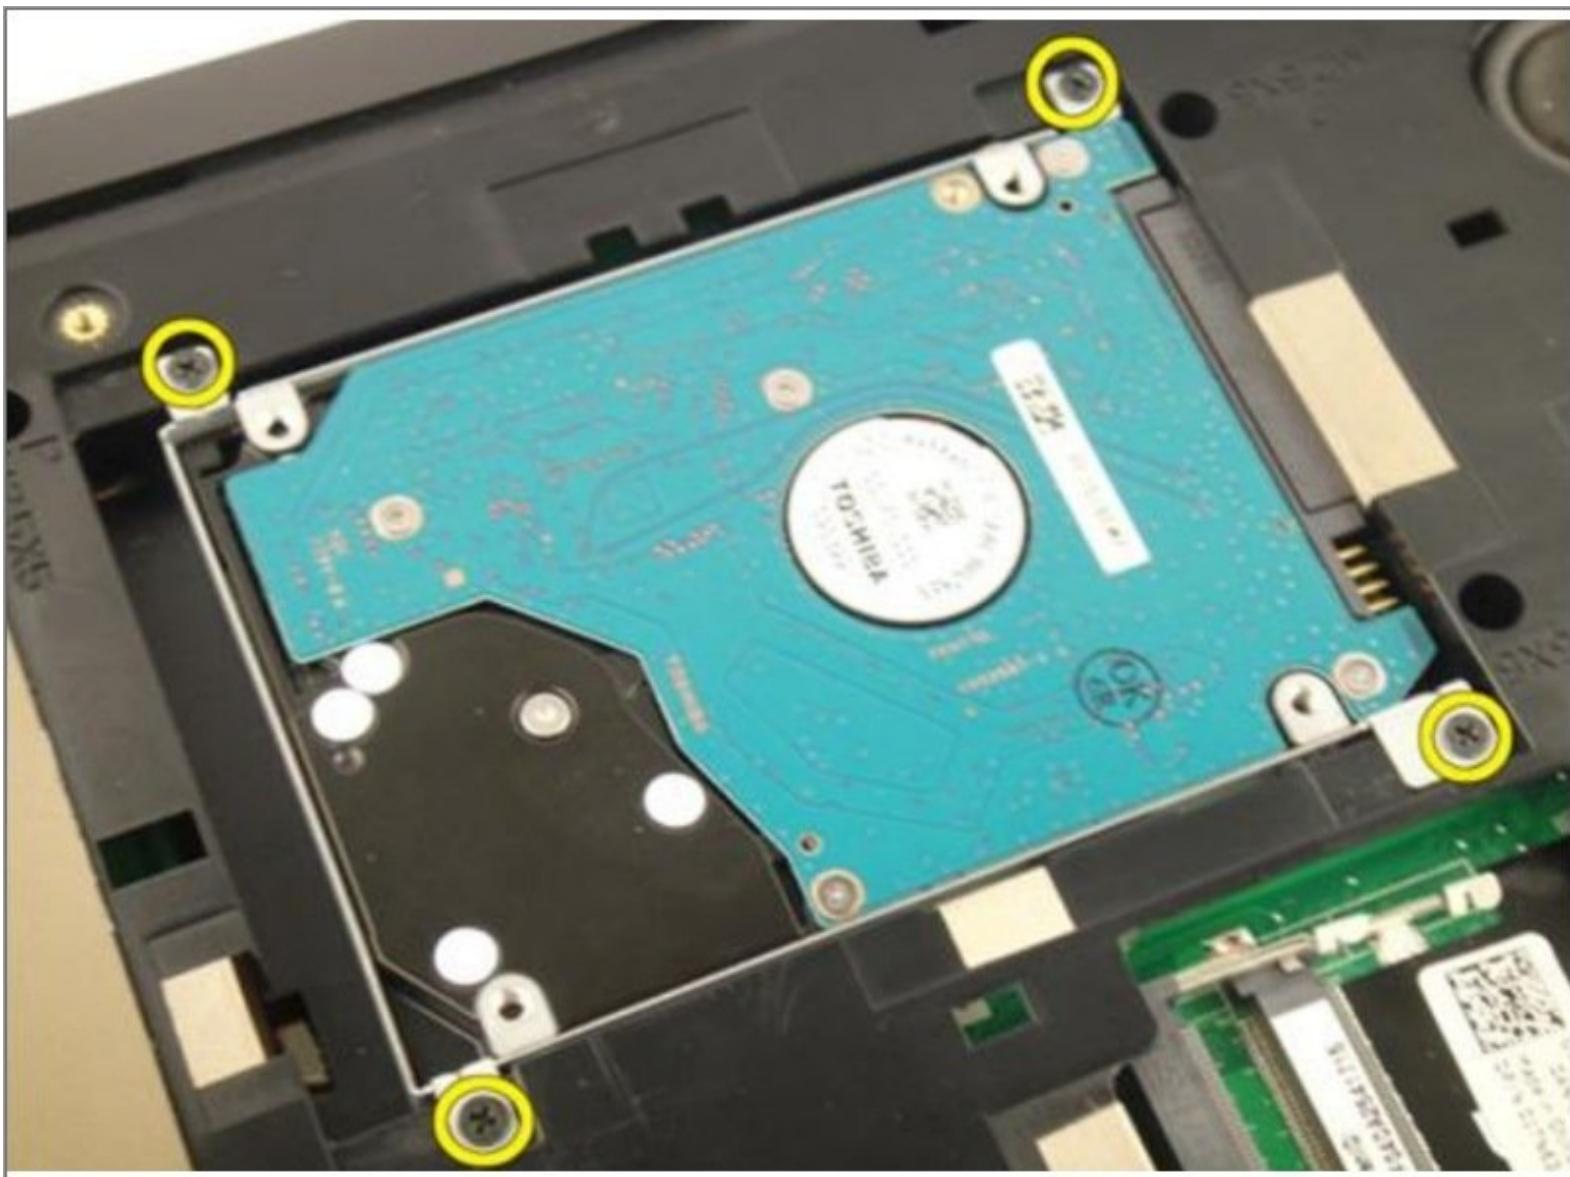

INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.

TOOLS:


- Phillips #0 Screwdriver (1)

Step 1 — Unlocking the Battery



- Slide the release latches to unlock the battery.

Step 2 — Removing the Battery

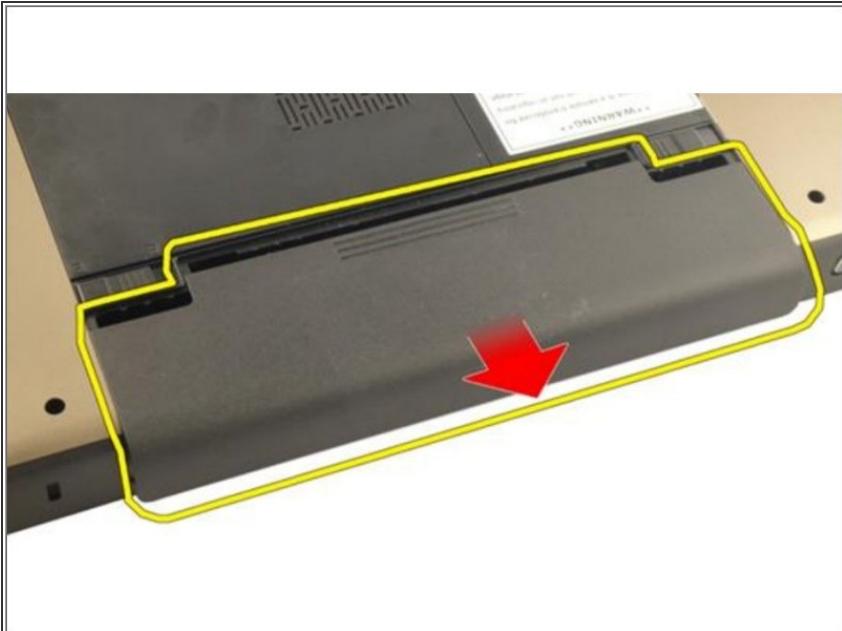

- Slide the battery out of the chassis and remove it from the computer.


 If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 3 — Loosen the Screws



- Loosen the screws that secure the memory door.


Step 4 — Removing the Memory Door

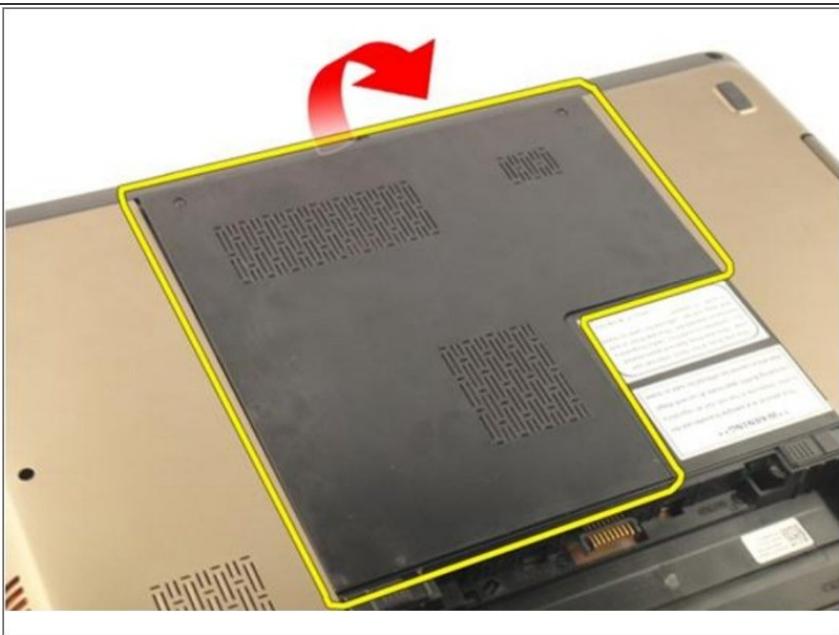

- Pry up the memory door near the screw hole, lift, and remove it


 If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 5 — Remove the Screws

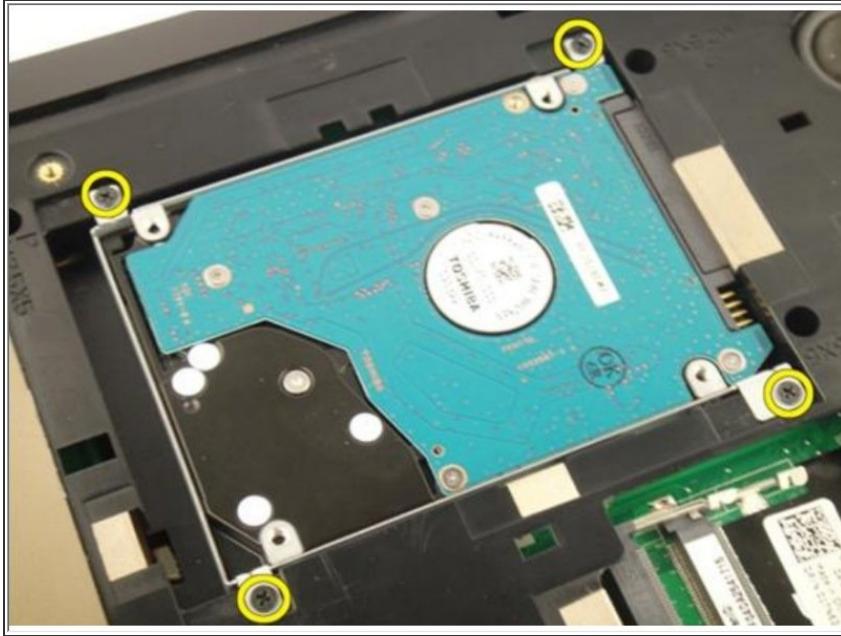


- Remove the screws that secure the hard-drive bracket.

Step 6 — Sliding the Module

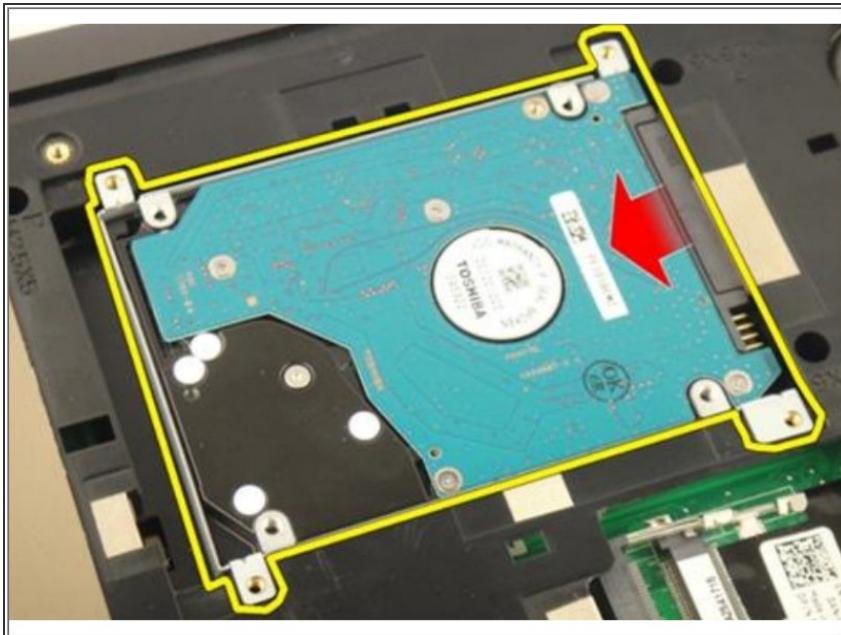


- Slide the hard drive module in the direction shown in the image below.

Step 7 — Remove the Hard Drive Module

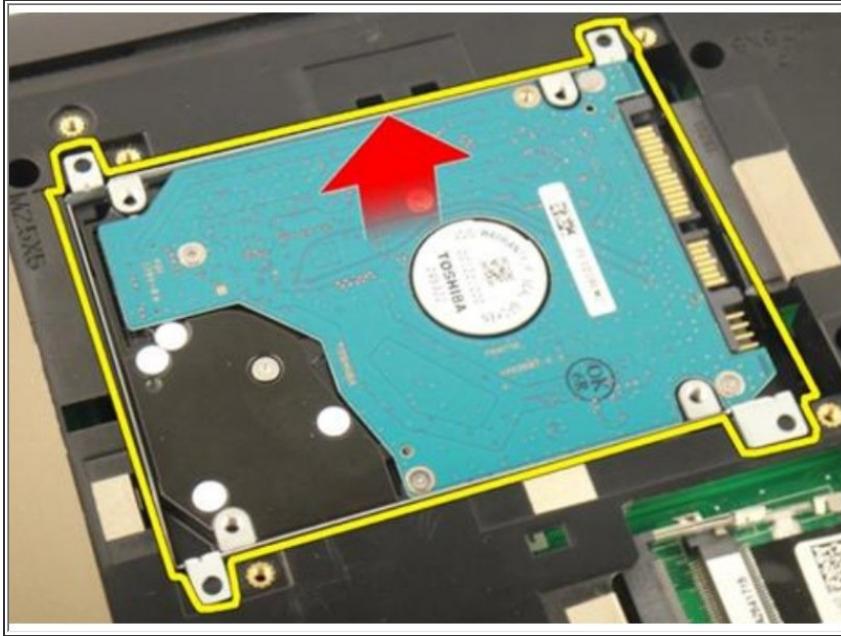


- Remove the hard drive module from the system board.

Step 8 — Remove the Screws

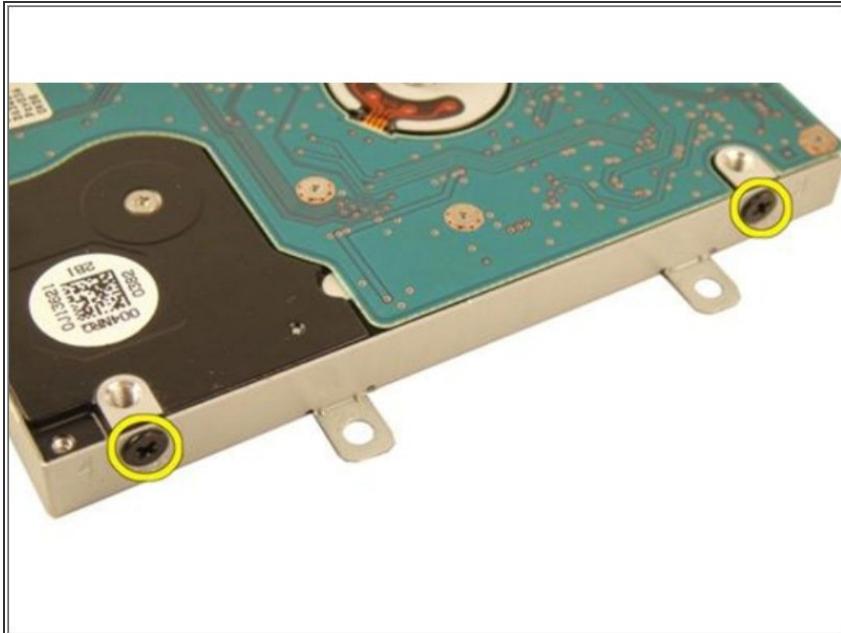

- Remove the screws that secure the hard-drive bracket.

Step 9 — Sliding the Hard Drive

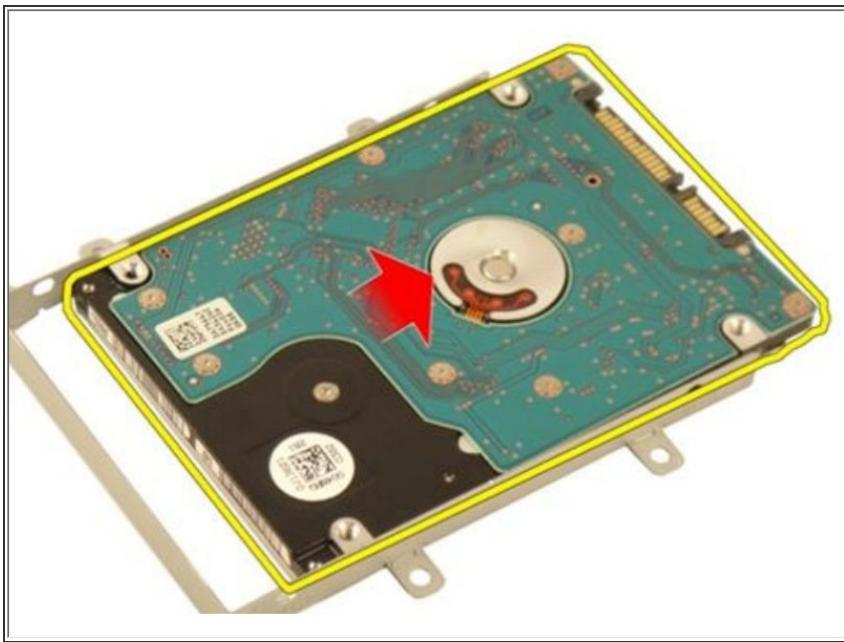

- Slide the hard drive from the hard-drive bracket.

 If this is all you are doing Follow Step In Reverse if not Go to Next Step.