




Dell XPS 12 9Q23 Touch Pad Replacement


Written By: DJ Jackson

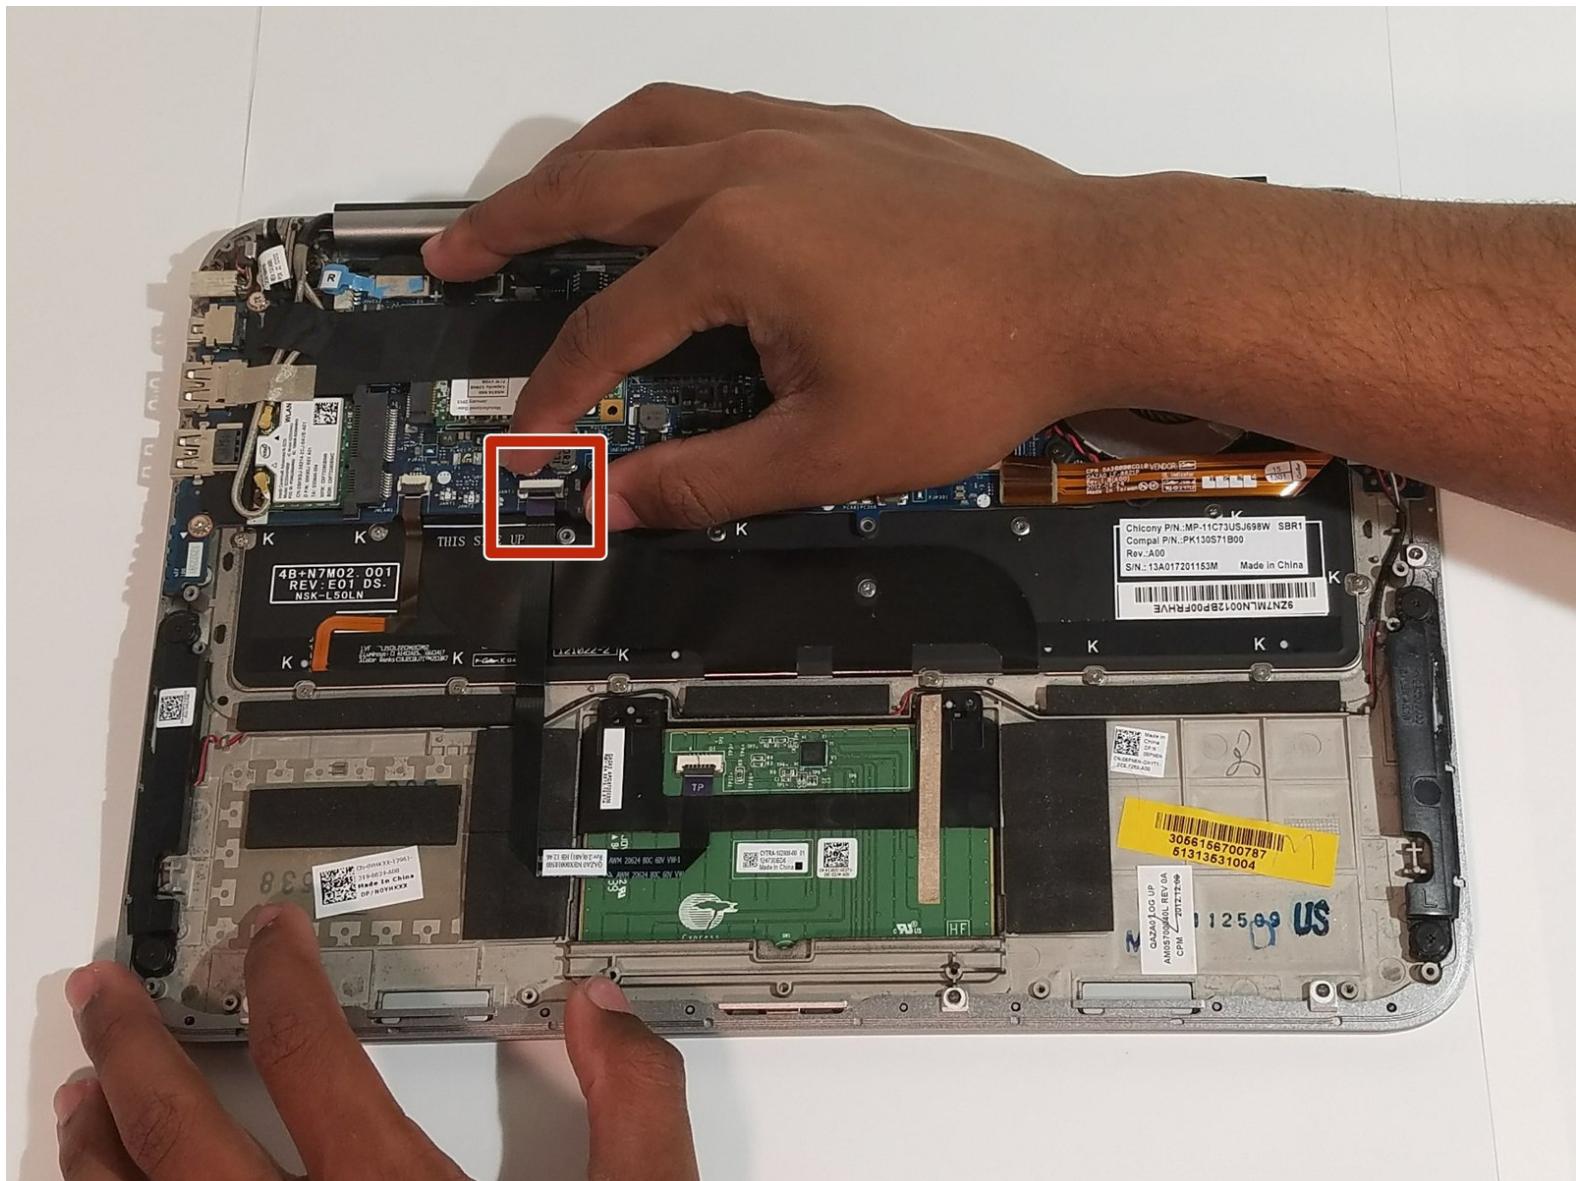

 **TOOLS:**

- [T5 Torx Screwdriver \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Battery

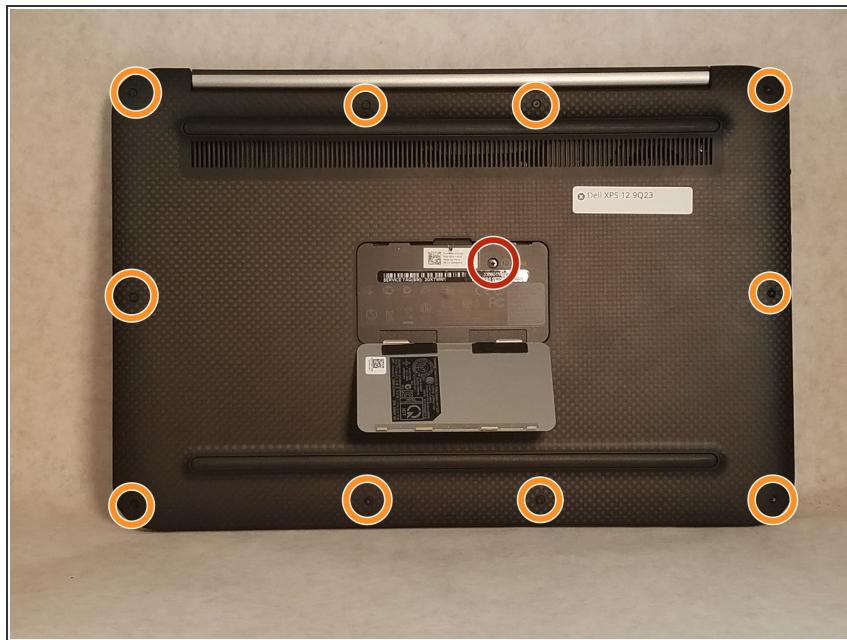


- Pop the center cover open on the bottom cover.
 - Remove the center screw with a #00 Phillips screwdriver.
 - Use a T5 Torx screwdriver for the remaining screws around the edge of the bottom cover.

Step 2




- Carefully remove back panel after all screws have been removed.

Step 3

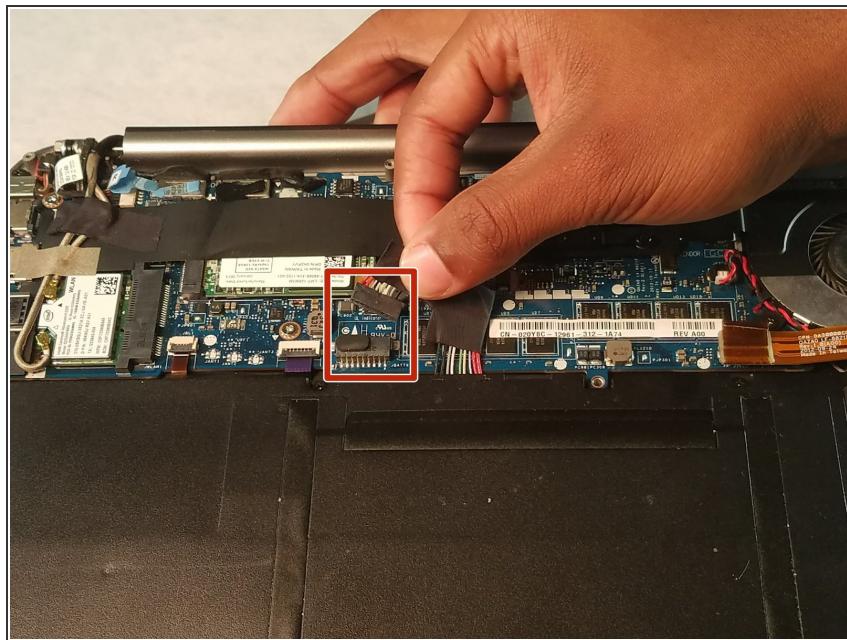


- After the back panel has been removed, disconnect the battery to prevent electrical shock

Step 4

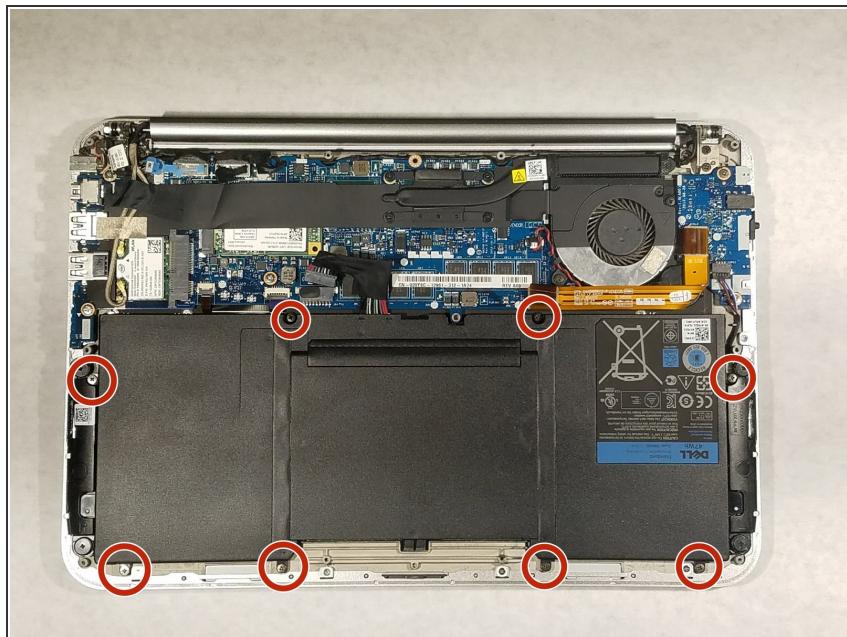


- Use a Phillips #00 screwdriver to remove the 8 screws that secure the battery.

Step 5 — Remove the battery

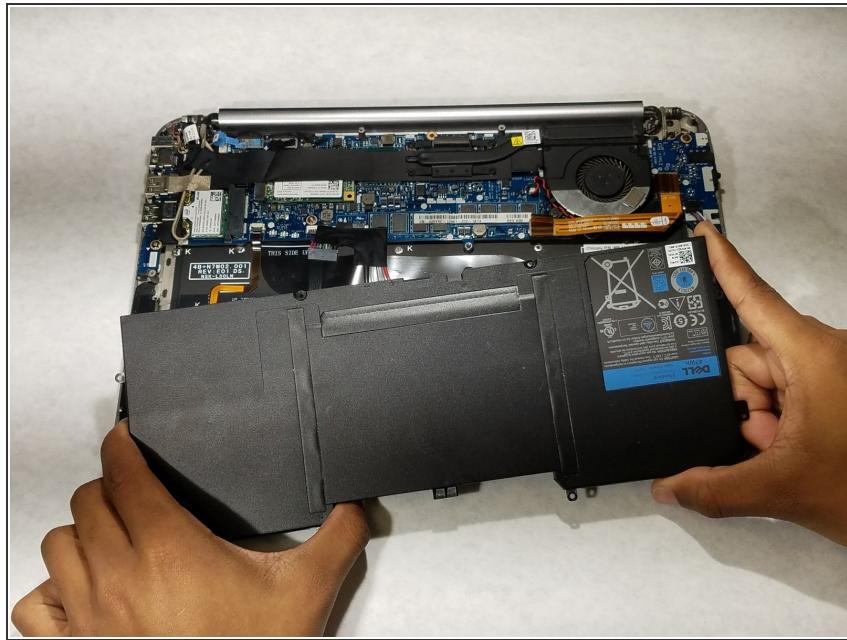


- Once all the screws have been removed the battery is now safe to extract

Step 6 — Touch Pad

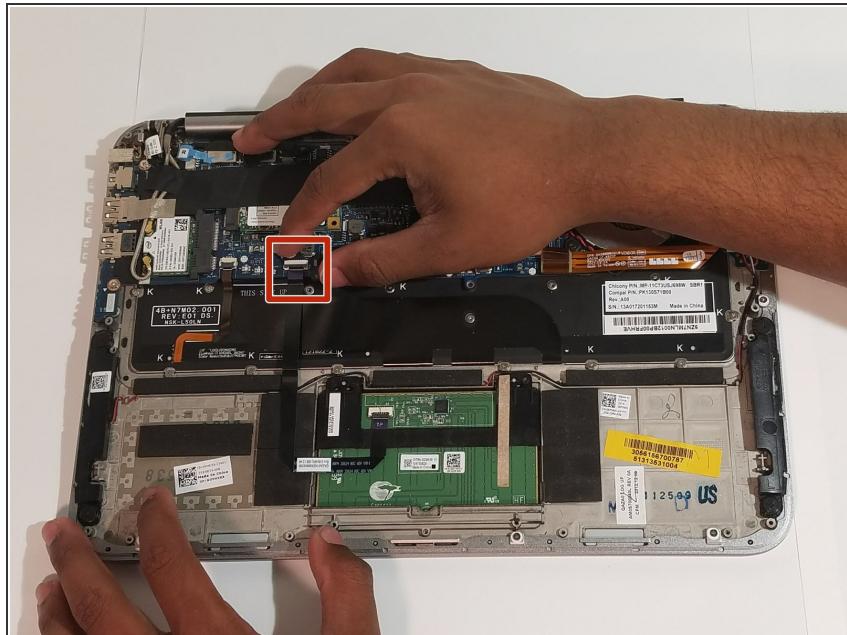


- Unplug the trackpad cable.

Step 7

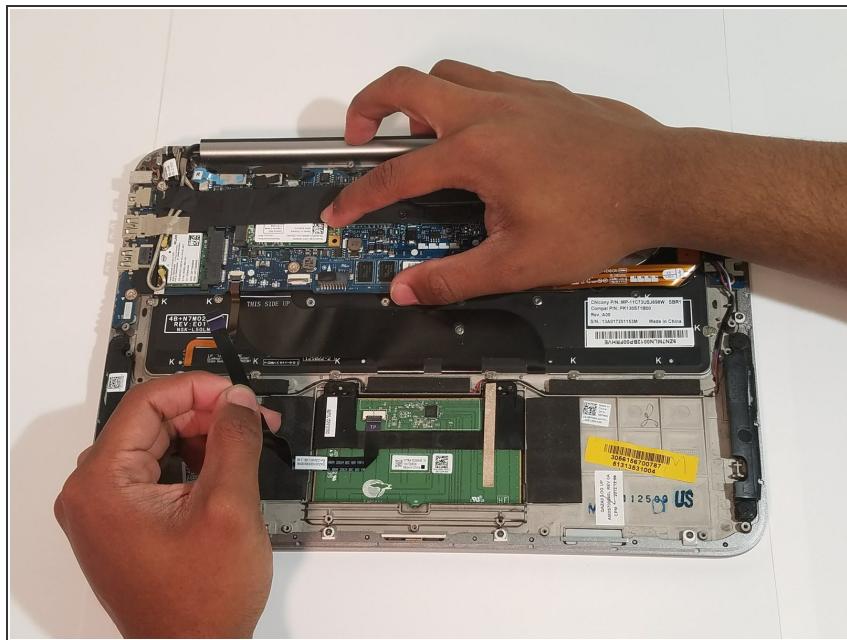


- Insert wisdom here.

Step 8

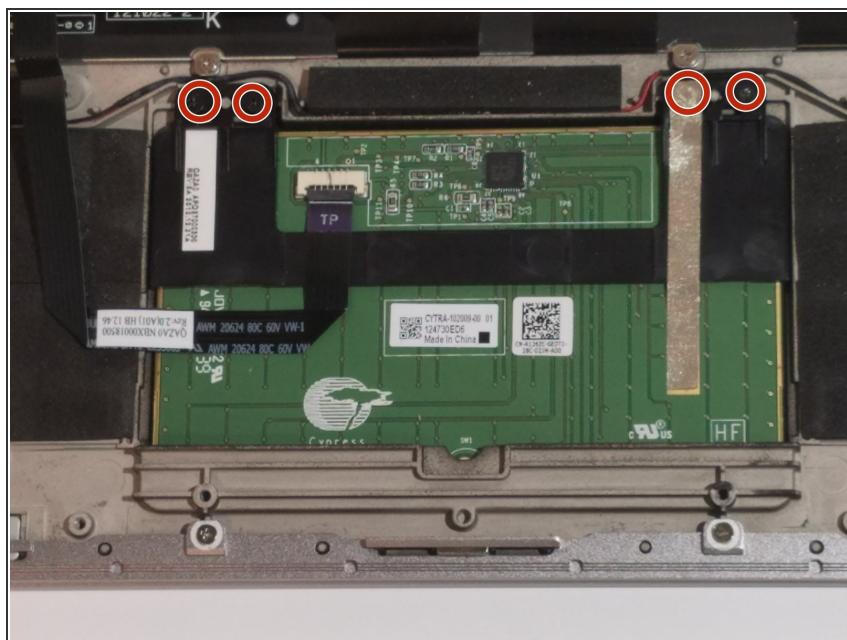

- Use a Phillips #00 screwdriver to remove the 4 trackpad screws.

Step 9

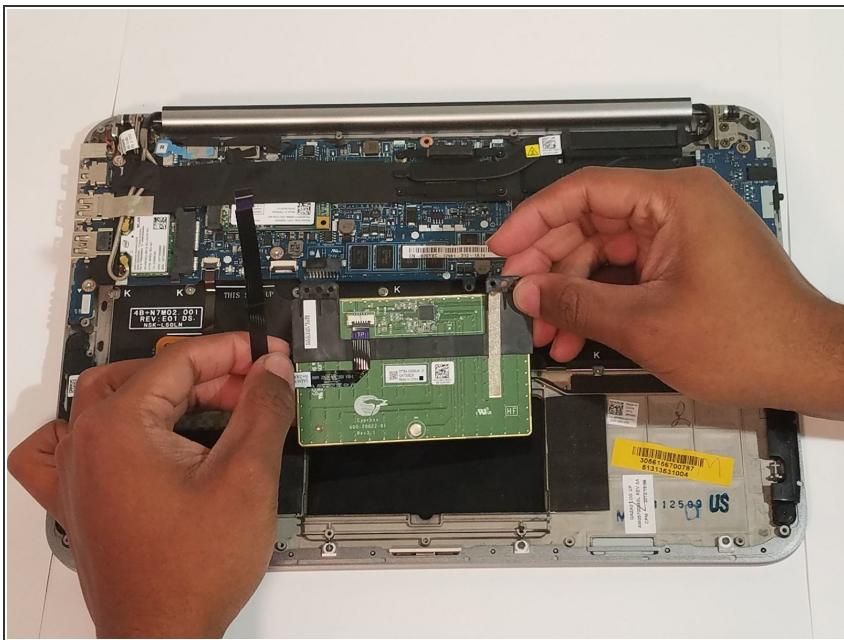

- Remove the trackpad.

To reassemble your device, follow these instructions in reverse order.