



Dell XPS 13 Battery Replacement

This guide will explain how to replace the battery in the Dell XPS 13 9350.

Written By: Ella Herrmann



INTRODUCTION

[**Click here**](#) for the updated version of this guide. The guide you are currently viewing is archived here for historical purposes only.

TOOLS:

- [T5 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

PARTS:

- [Dell XPS13 9343 9350 Replacement Laptop Battery \(1\)](#)

Step 1 — Back Cover



- Remove the eight 4 mm T5 Torx screws from the bottom cover.

Step 2



- Use a plastic opening tool to pry open the 'XPS' flap in the middle.

Step 3



- Remove the single Phillips screw hidden beneath the flap.

Step 4




- Use opening picks or a plastic pry tool to pry open the case clips, beginning from the back edge.

Step 5




- Remove the bottom cover.

Step 6 — Battery

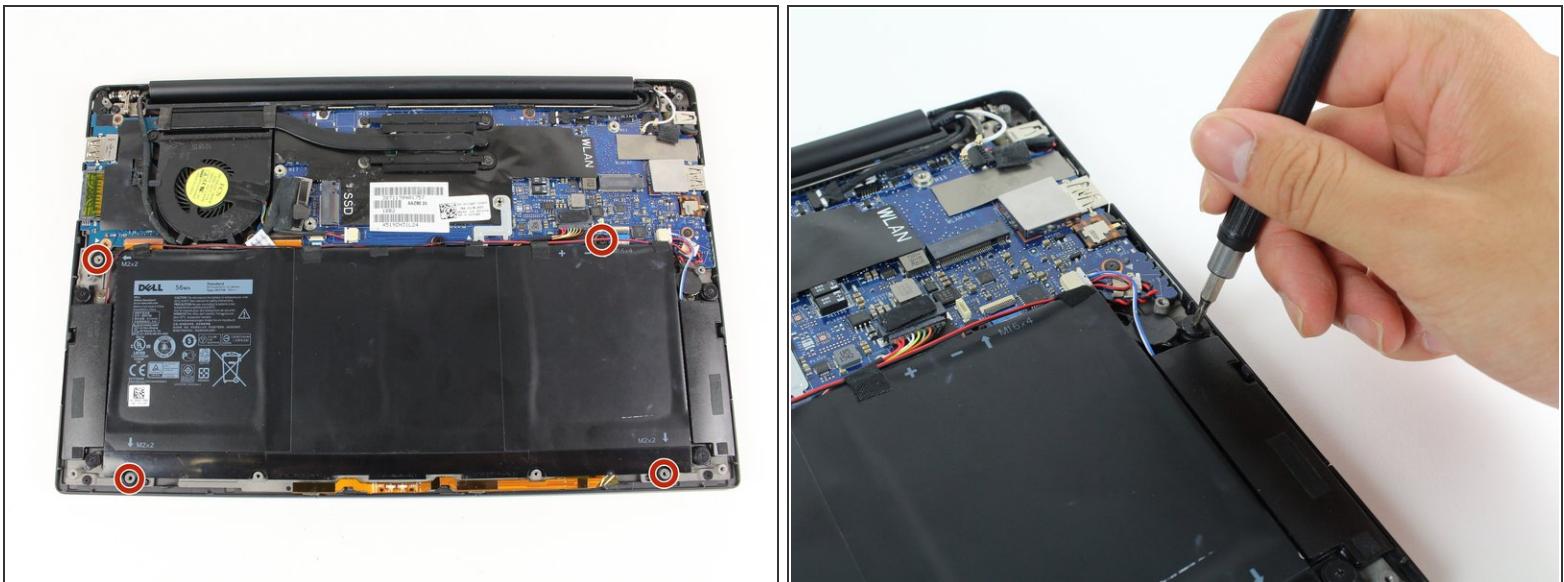

- Remove the four 3 mm Phillips #0 screws located on each corner of the battery.


Step 7

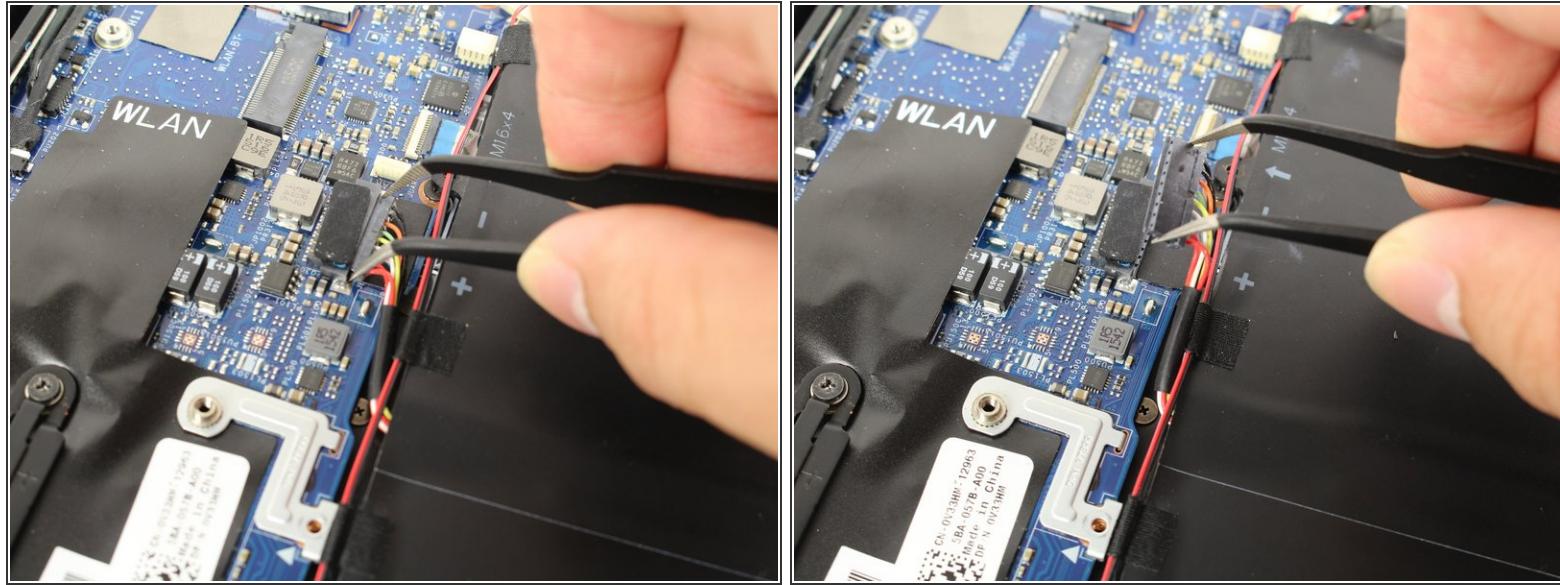

- Pull the battery cable connector towards the battery to disconnect it from its socket.

 Do not pull up.

Step 8

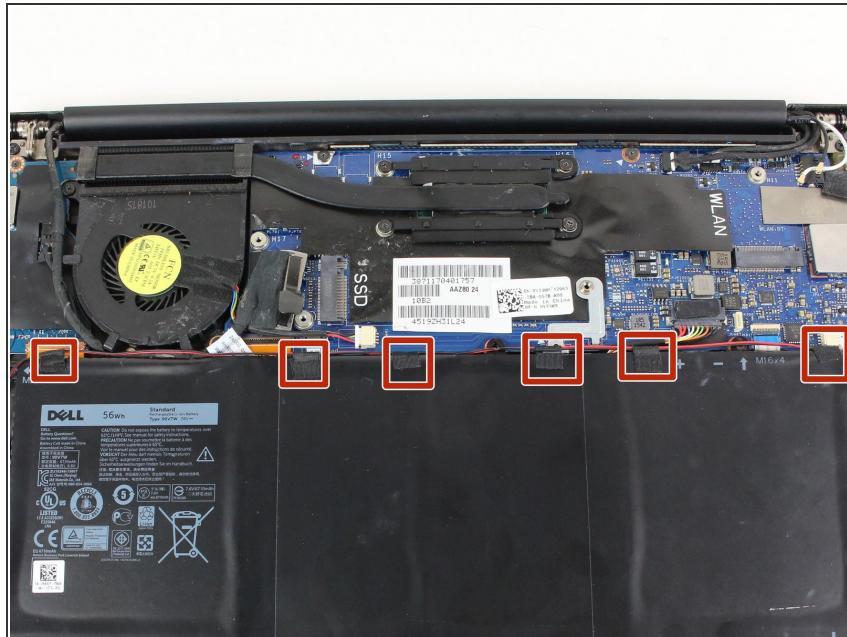

- Peel up any tape securing the speaker cables to the battery.
-  You do not need to remove the speakers, only the tape, allowing the battery to be removed out under the speaker cables.

Step 9

- Remove the battery.



To reassemble your device, follow these instructions in reverse order.