




Dell XPS 14Z L412Z Back Panel Replacement

To open up your computer, you will need to open up the back panel. This guide is for users who have a damaged backing, or if one needs to access internals.

Written By: Ryan Vanden Boomen

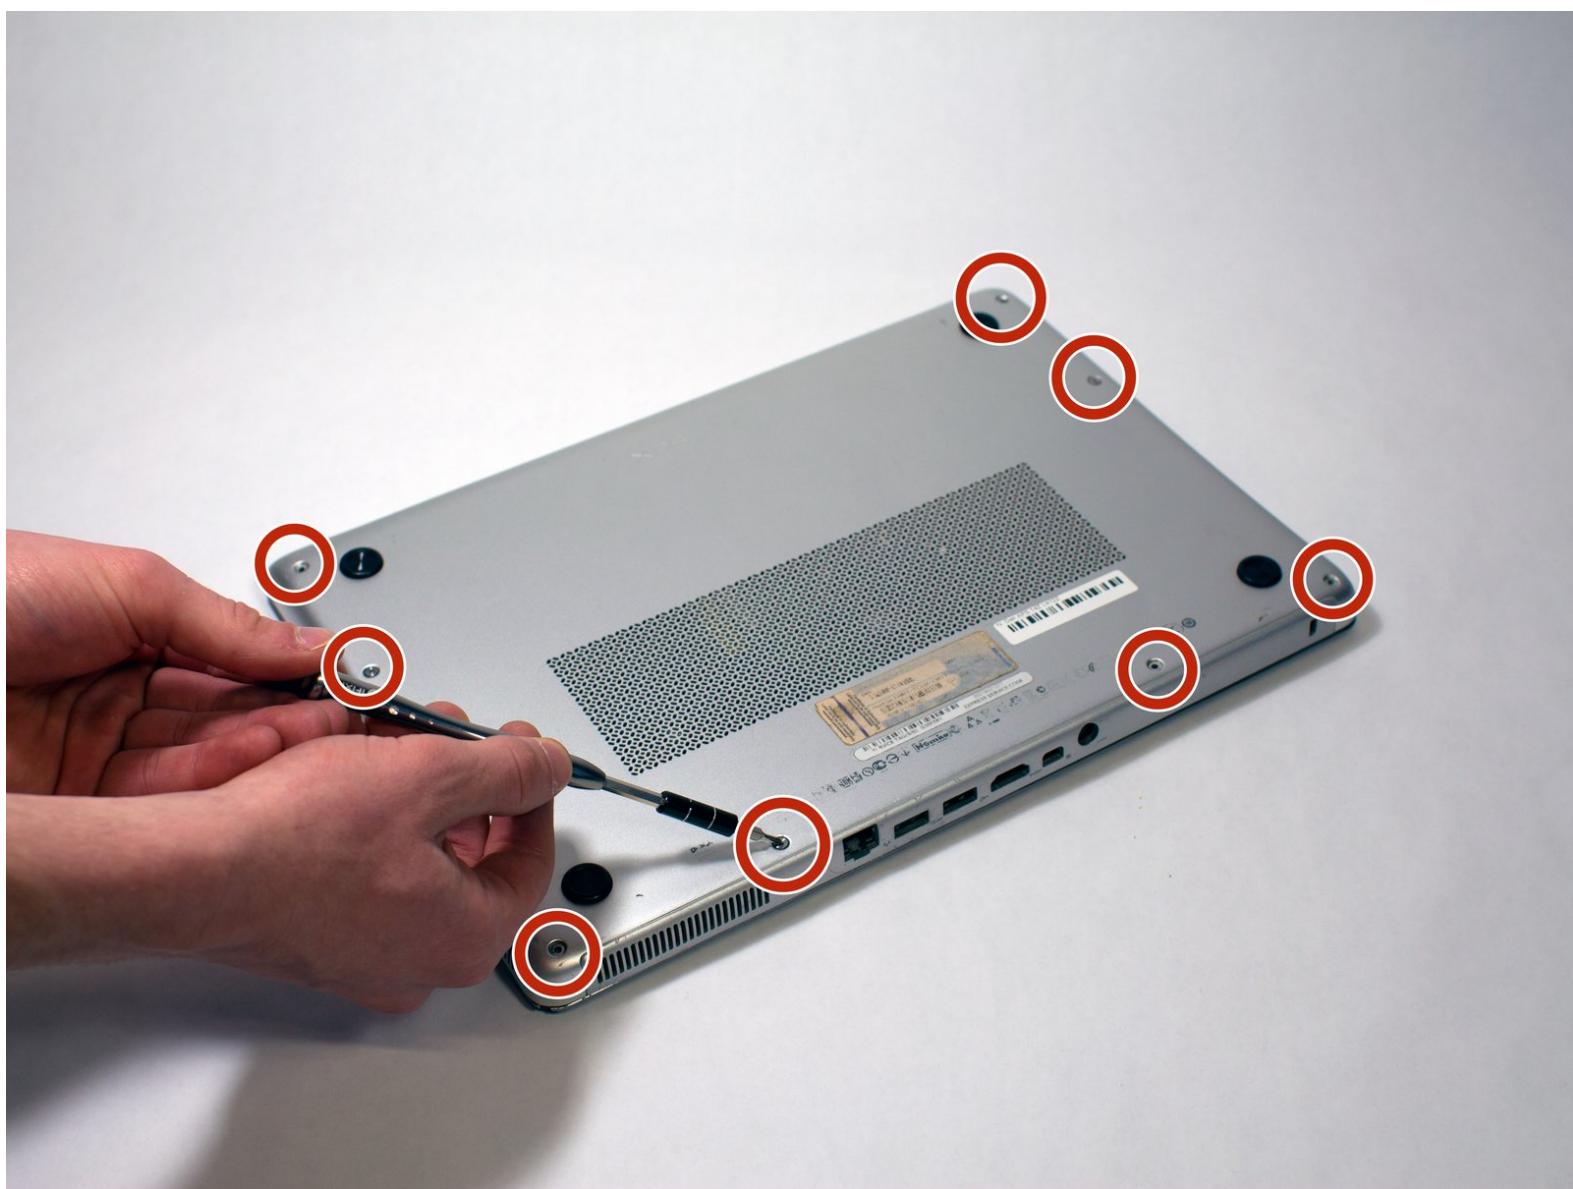


INTRODUCTION

To open up the Dell XPS 14Z L412Z, one will need to first remove the back panel. This is a relatively simple and safe procedure. One place where care is necessary is around the I/O ports. The back panel provides the initial shell for these ports. Be careful not to damage these ports while pulling the panel. You will need one tweezers, a Phillips #0 screwdriver, and a plastic opening tool.

TOOLS:


- [Phillips #0 Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Back Panel

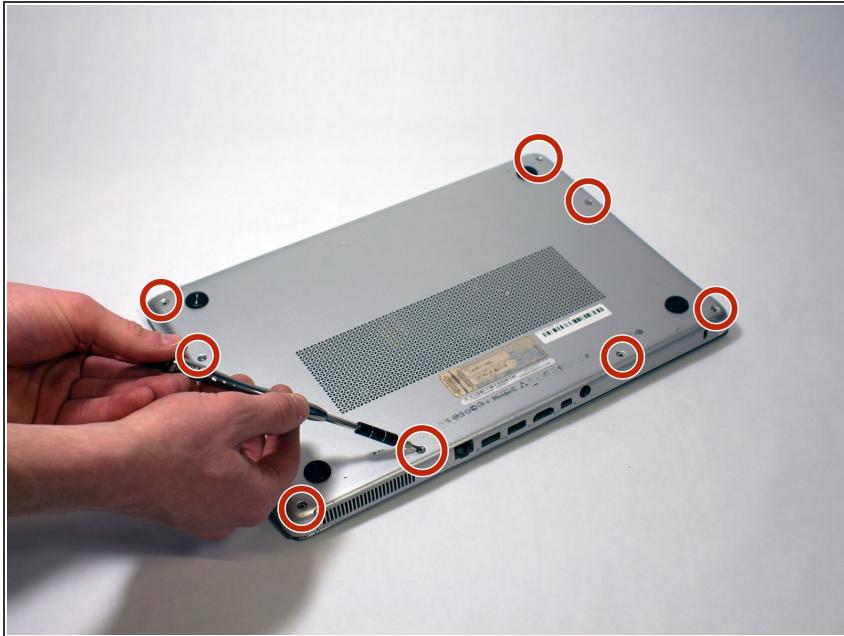

- Remove the back cover of the laptop by unscrewing eight 3.5mm screws using a Phillips #0 screwdriver.

Step 2

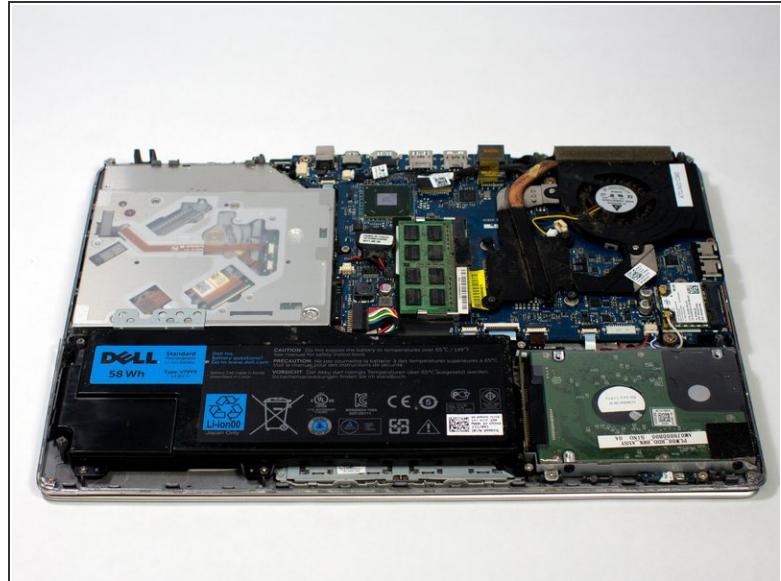

- Using the plastic opening tool, pry up the back cover.
- It is recommended to start from a corner and run the tool along the edge of the cover.

To reassemble your device, follow these instructions in reverse order.